



Sconce Wall Facade



Description

The LITELUME™ Sconce Wall Facade (LL-SWF) luminaire incorporates a traditional fresh design. Features a die-formed cold rolled steel housing in oil rubbed bronze with frosted glass lens for a subtle approach. Offering a standard model, and built-in emergency light model in 3000k, high power factor and low THD.

Applications: commercial, residential, hospitality and entertainment.

Fixture Information

Size:	15W
Housing:	Die-formed cold rolled steel
Finish:	Protective powder coat
Color:	Standard:Oil Rubbed Bronze (ORB)
Mounting:	Standard: Wall Mount
Lens:	Frosted Glass
CRI:	80
Power Factor:	.90
Voltage:	Standard: 120V
Warranty:	10-Year Limited Warranty

Performance Data

Lumen Output:

1250 lm

Lumens Per Watt (typical):

83 lm/W

CCT:

3000K

Ratings & Certificates


ETL/cETL Listed
Damp Location Listed





Dimension

Item	Width	Depth	Height
15W	8.0"	3.6"	14.0"

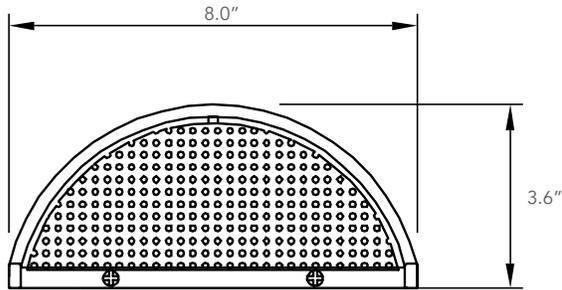



Project Name	
Catalog #	
Job Type	
Prepared By	
Notes	

Fixture Ordering Information

Part #	Wattage	Lumens	Kelvin	Voltage	Color
LL-SWF-15-30-120-ORB	15	1250	3000	120	Oil Rubbed Bronze

* Please contact LITELUME for all Custom Option Requests

Built-In Emergency Light Model

Part #	Wattage	Lumens	Kelvin	Voltage	Color
LL-SWF-EM-15-30-120-ORB	15	1250	3000	120	Oil Rubbed Bronze

* Please contact LITELUME for all Custom Option Requests