



# High Bay Round High Power



\*with sensor



## Description

The LITELUME™ LED High Bay Round High Power (HBRHP) is a low profile high bay luminaire constructed with a IP65 rated one piece die cast housing suitable for both indoor and outdoor applications. Featuring a proprietary optical system, Inventronics driver & premium LED's boasting over 160 LPW making this fixture ideal for high illumination high bay applications.

## Fixture Information

Size:	340W
Housing:	Sealed Die-casting
Finish:	Protective powdercoat
Color:	Standard: Bronze Custom Options: Black (BK) White (WH)
Mounting:	Standard: Hook Mount or 3/4" pendant mount
Lens:	Standard: Polycarbonate Clear Lens
Surge Protector:	Optional: 10 kVA
Operating temperature	-40° F to 149° F
Power factor	.95
CRI:	80
Voltage:	Standard: 120-277V / 277-480V
Sensor:	Standard: No sensor Optional: Bi-level Motion Sensor
Warranty:	10-Year Limited Warranty

## Performance Data

### Lumen Output:

54,300 to 55,500 lm

### Lumens Per Watt (typical):

160 to 163 lm/W

### CCT:

4000K  
5000K

### Distribution

120°

### Lifespan:

Features Inventronics driver & premium LED's with up to 100,000 running hours

## Ratings & Certificates


UL Listed For Wet Location  
IP 65 Rated





### Dimension

Item	Diameter	Height	Weight
340W	24.25"	4.763"	17.57 lbs

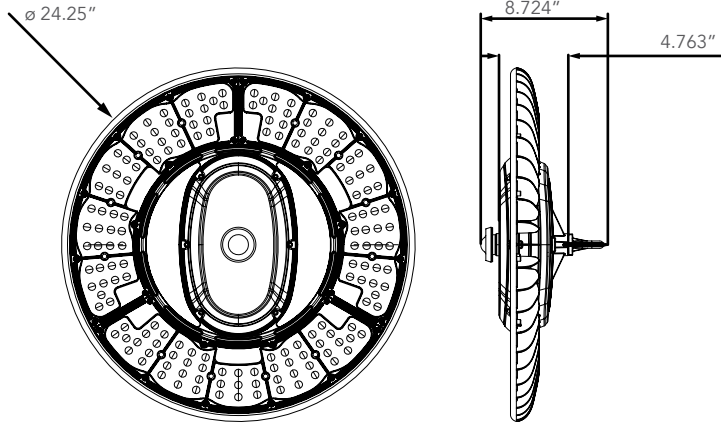



<b>Project Name</b>	
<b>Catalog #</b>	
<b>Job Type</b>	
<b>Prepared By</b>	
<b>Notes</b>	

### Fixture Ordering Information

Part #	Wattage	Lumens	Kelvin	Voltage	Type Distribution
LL-HBRHP-340-50-UNV-BZ	340	55500	5000	120-277	120
LL-HBRHP-340-40-UNV-BZ	340	54300	4000	120-277	120
LL-HBRHP-340-50-HV-BZ	340	55500	5000	277-480	120
LL-HBRHP-340-40-HV-BZ	340	54300	4000	277-480	120

### Accessories Ordering Information

Part #	Wattage
MS20	Bi-Level PIR Motion Sensor 20

\* Please contact LITELUME for all Custom Option Requests

### Buy American Act Compliant Ordering Information

Part #	Description
BAA-HBRHP	Buy American Act Compliant for High Bay Round High Power

\* Please contact LITELUME for all Custom Option Requests