



LED Bollard Round High Lumen 6 Series



BRPDT



BRPFT



BRLDT



BRLFT

Description

The LITELUME™ Bollard Collection (LL-B) features an anti-corrosion, shock resistant heavy duty die-cast aluminum housing for long-lasting durability. Easy installation and maintenance due to our self-oriented top cover design. A wide range of sizes and lumen packages allow for variety of applications. Introducing the Round High Lumen 6 Series.

Applications: Security, Pathway, Perimeter, Pedestrian and Walkway lighting.

Fixture Information

Size:	25W
Housing:	Die-cast Aluminum Housing
Finish:	Protective powdercoat
Color:	Standard: Bronze(BZ), Anthracite Gray(LBK) Custom Options: White(WH), Black(BK) and Gray(GY)
Power Factor:	.95
CRI:	80
Voltage:	Standard: 120-277V
Sensor:	Standard: No sensor
Warranty:	10-Year Limited Warranty

Performance Data

Lumen Output:

1570 to 2500 lm

Lumens Per Watt (typical):

62 to 100 lm/W

CCT:

3000K
4000K
5000K

Distribution:

T5 120D

Lifespan:

100,000 hours

Ratings & Certificates


ETL Listed for Wet Location
IP65 Listed






Dimensions

Item	Diameter	Length
Round Top Louver (BRLDT)	6.25"	40.00"
Round Top Parabolic (BRPDT)	6.25"	39.31"
Flat Top Louver (BRLFT)	6.25"	40.00"
Flat Top Parabolic (BRPFT)	6.25"	39.31"

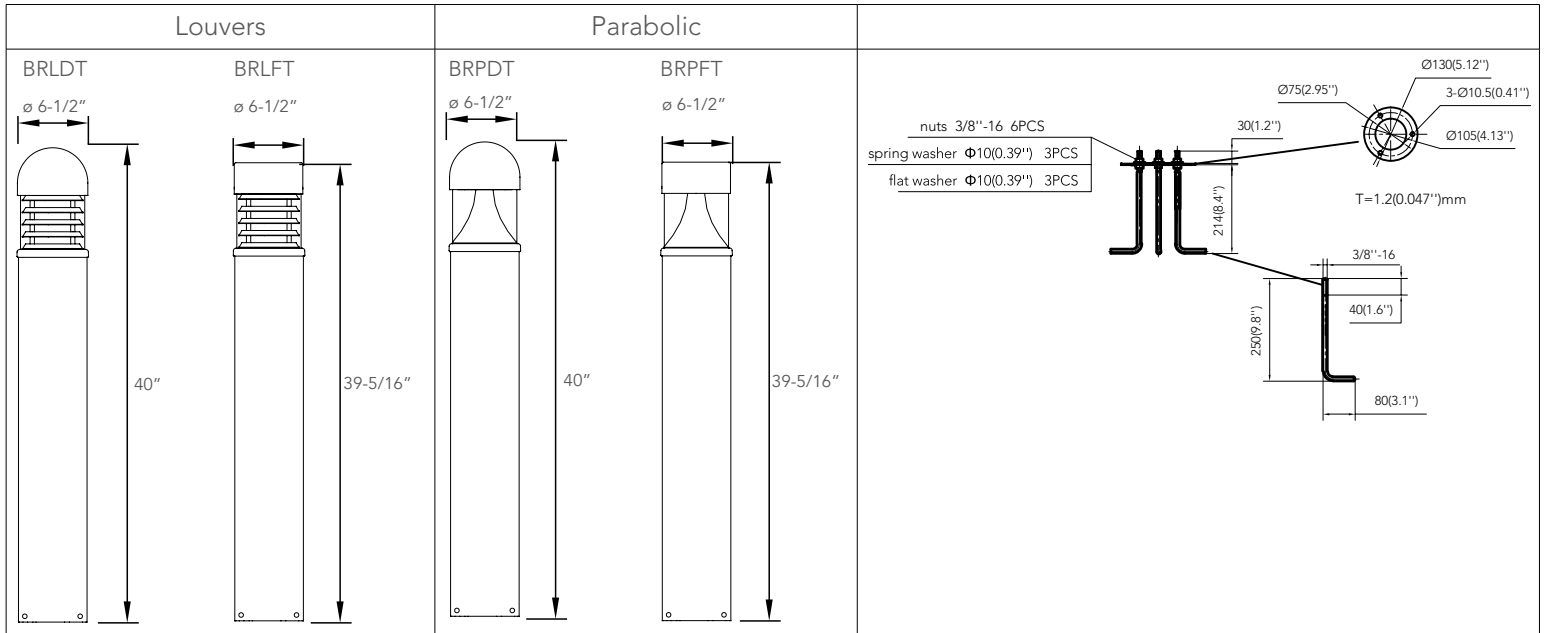


Photometric Data

Louvers

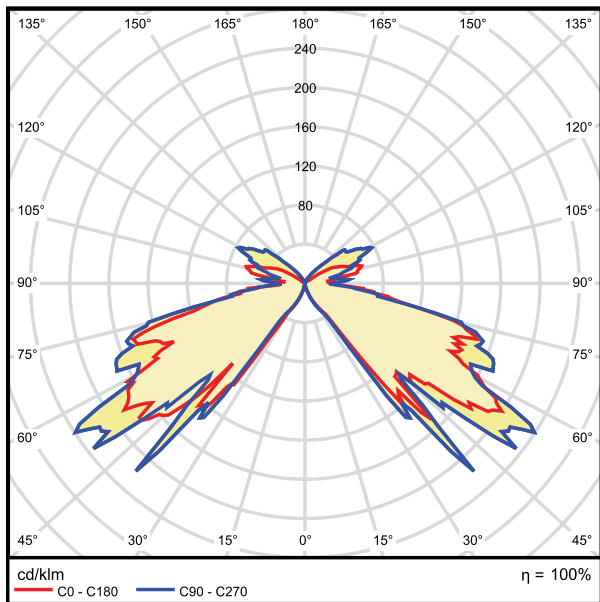

Prismatic

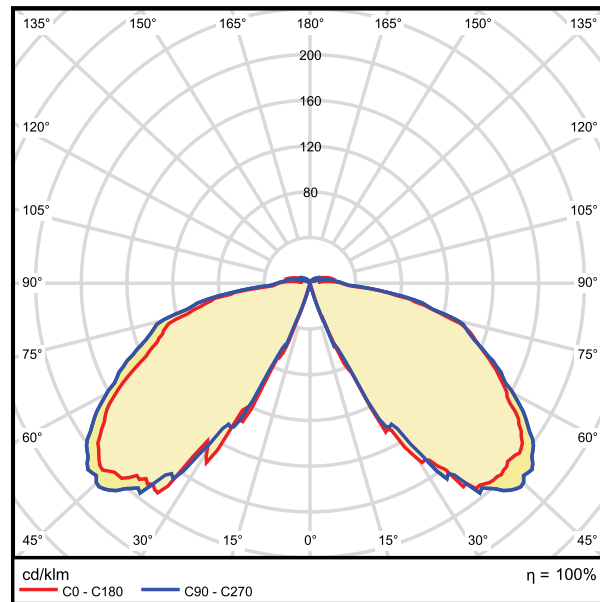



Project Name	
Catalog #	
Job Type	
Prepared By	
Notes	

Fixture Ordering Information

Part #	Wattage	Lumens	Kelvin	Voltage	Type Distribution	Color
LL-BRLDTHL6-25-50-UNV-BZ	25	1750	5000K	120-277	T5 120D	Bronze
LL-BRLDTHL6-25-40-UNV-BZ	25	1660	4000K	120-277	T5 120D	Bronze
LL-BRLDTHL6-25-30-UNV-BZ	25	1570	3000K	120-277	T5 120D	Bronze
LL-BRLDTHL6-25-50-UNV-LBK	25	1750	5000K	120-277	T5 120D	Anthracite Gray
LL-BRLDTHL6-25-40-UNV-LBK	25	1660	4000K	120-277	T5 120D	Anthracite Gray
LL-BRLDTHL6-25-30-UNV-LBK	25	1570	3000K	120-277	T5 120D	Anthracite Gray
LL-BRLFTHL6-25-50-UNV-BZ	25	1750	5000K	120-277	T5 120D	Bronze
LL-BRLFTHL6-25-40-UNV-BZ	25	1660	4000K	120-277	T5 120D	Bronze
LL-BRLFTHL6-25-30-UNV-BZ	25	1570	3000K	120-277	T5 120D	Bronze
LL-BRLFTHL6-25-50-UNV-LBK	25	1750	5000K	120-277	T5 120D	Anthracite Gray
LL-BRLFTHL6-25-40-UNV-LBK	25	1660	4000K	120-277	T5 120D	Anthracite Gray
LL-BRLFTHL6-25-30-UNV-LBK	25	1570	3000K	120-277	T5 120D	Anthracite Gray
LL-BRPDTHL6-25-50-UNV-BZ	25	2500	5000K	120-277	T5 150D	Bronze
LL-BRPDTHL6-25-40-UNV-BZ	25	2375	4000K	120-277	T5 150D	Bronze
LL-BRPDTHL6-25-30-UNV-BZ	25	2250	3000K	120-277	T5 150D	Bronze
LL-BRPDTHL6-25-50-UNV-LBK	25	2500	5000K	120-277	T5 150D	Anthracite Gray
LL-BRPDTHL6-25-40-UNV-LBK	25	2375	4000K	120-277	T5 150D	Anthracite Gray
LL-BRPDTHL6-25-30-UNV-LBK	25	2250	3000K	120-277	T5 150D	Anthracite Gray
LL-BRPFTHL6-25-50-UNV-BZ	25	2500	5000K	120-277	T5 150D	Bronze
LL-BRPFTHL6-25-40-UNV-BZ	25	2375	4000K	120-277	T5 150D	Bronze
LL-BRPFTHL6-25-30-UNV-BZ	25	2250	3000K	120-277	T5 150D	Bronze
LL-BRPFTHL6-25-50-UNV-LBK	25	2500	5000K	120-277	T5 150D	Anthracite Gray
LL-BRPFTHL6-25-40-UNV-LBK	25	2375	4000K	120-277	T5 150D	Anthracite Gray
LL-BRPFTHL6-25-30-UNV-LBK	25	2250	3000K	120-277	T5 150D	Anthracite Gray

* Please contact LITELUME for all Custom Option Requests

Accessories Ordering Information

Part #	Wattage
EM7	Emergency Battery Back Up 7W
SUB "UNV" WITH "480"	480 Volt

* Please contact LITELUME for all Custom Option Requests

Buy American Act Compliant Ordering Information

Part #	Description
BAA-B	Buy American Act Compliant for Bollard

* Please contact LITELUME for all Custom Option Requests