



Description

Low Profile All LED Exit & Emergency Thermoplastic Combo

Illumination:

- Adjustable long lasting, efficient ultra bright white LED lamp heads.
- One, 0.5 watt white LED per lamp head.
- Unique all inclusive lamp, reflector and lens assembly.
- Long-lasting, energy efficient Red or Green LED EXIT sign illumination.

Electrical:

- Dual 120V/277 voltage standard. Optional dual 120V/230V available.
- Unique bi-color LED indicator light alerts occupant on battery condition (Green-normal, Red-check battery).
- 3.6V long life, maintenance-free, rechargeable NiCd battery.
- Internal solid-state transfer switch automatically connects the internal battery to LED board and LED lamp heads for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.

Mounting:

- EZ-snap thermoplastic mounting canopy included – provides top or end mount.
- Universal knockout pattern on back plate for wall mount.

Housing:

- Injection-molded, engineering grade, 5VA flame retardant, high-impact, thermoplastic in white or black finish.
- Aesthetically pleasing, curved face rounded corner design.
- EZ snap-out Chevron directional indicators.

Options:


- RC: Remote capacity of up to 1.0 watts.
- SPV: UL Listed for 208/220/240 Volt, 50/60 Hz.

Warranty/Listing:

- One year warranty on all electronics and housing. Battery prorated for one years.
- UL Listed for damp locations (0°C – 40°C).
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Code
- Certified to CEC under Title 20 Regulations.



Dimensions:

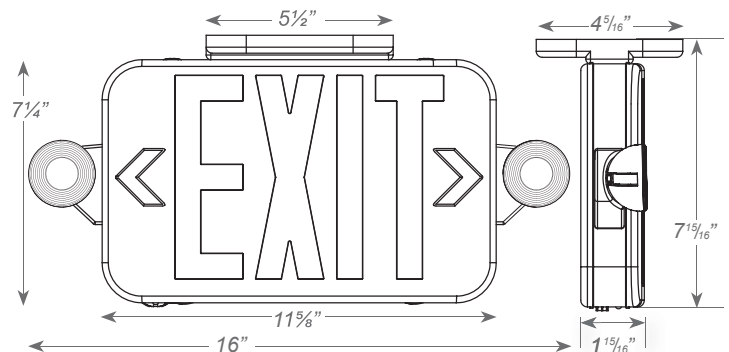



Project Name	
Catalog #	
Job Type	
Prepared By	
Notes	

Fixture Ordering Information

Model	No. of Faces		Letter Color		Housing Color		Options	
LL-CEU	3	Universal Single/ Double Face	R	Red	W B	White Black	RC SPV	Remote Capacity 120/230 Volt 50/60Hz