



## Description

Emergency Driver For Led Lamps (With Internal/External Driver)

## Illumination:

- Provides 180-320VDC (equals to 120-230VAC) to the load during emergency mode operation.
- For use with switched or unswitched fixtures.
- Can be used with LED lamp loads of up to 20W and provide 100% lumen output.

## Electrical:

- Universal 120-277V, 50-60 Hz input.
- Charge/Power "ON" LED indicator light and push-to-test switch for mandated code compliance testing.
- Long-life, maintenance free, rechargeable NiCad battery.
- Output short/over current protection: Electronic limiting, with normal operation resuming upon removal of fault.
- 90 Minute minimum emergency operating time over full temperature range.
- 24 Hour maximum battery recharge time.

## Housing:


- Durable painted steel construction in red finish.
- Provided with 2' flex conduits.

## Warranty/Listing:


- UL Listed for factory or field installation.
- Suitable for damp locations (0°C - 50°C).
- 5 year warranty on all electronics and housing.
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local State codes.



## Dimensions:

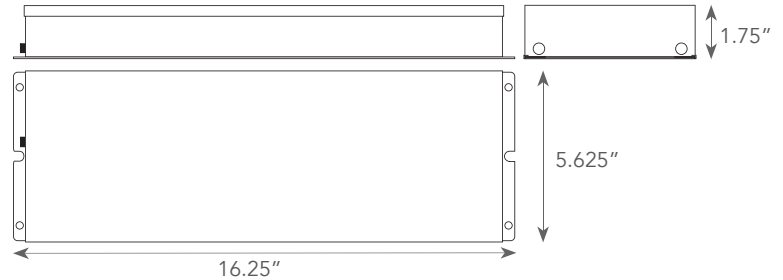

## Wiring Diagram:

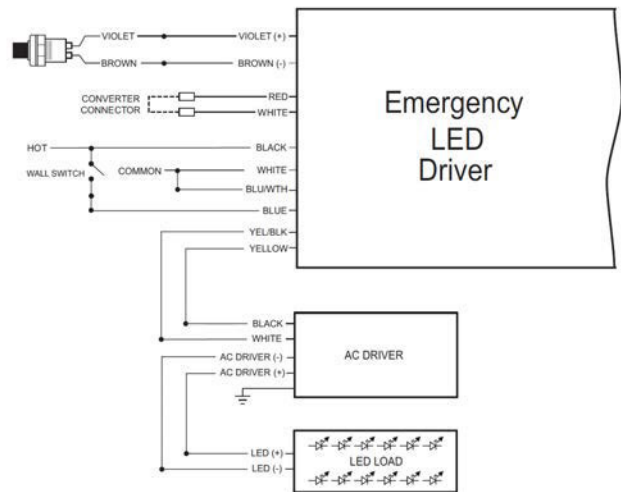



<b>Project Name</b>	
<b>Catalog #</b>	
<b>Job Type</b>	
<b>Prepared By</b>	
<b>Notes</b>	

### Fixture Ordering Information

<b>Part #</b>	<b>Wattage</b>	<b>Voltage</b>
LLEDEM-BP/DM-20	20	180-320