

# LED Downlight Disk Installation Instructions



## **⚠ Warning**

PLEASE READ ALL INSTRUCTIONS BEFORE ATTEMPTING INSTALLATION

1. To avoid electric shock, disconnect power at source prior to installation.
2. The installation should be performed by qualified electricians or lighting technicians.
3. Before conducting any installation, maintenance, or removal, disable all power to the luminaries and wait until the fixture cool down.
4. Do not touch the fixture while it is in service.
5. If there is any problem with the fixture, DO turn off power and DO NOT attempt repair unless you are a qualified technician or the customer service member.

## **⚠ Warning - Risk of Fire or Electric Shock**

- Do not make or alter any open holes in an enclosure of wiring or electrical components during lamp installation.
- To prevent wiring damage or abrasion, do not expose wiring to edges of sheet metal or other sharp objects.
- Suitable for wet locations.
- Suitable for type ic or suitable for type non-ic.
- This device is not intended for use with emergency exits.

## **Assembly and Installation**

This IC/AT fixture is intended for use in suspended ceilings(with or without insulation). Shut off power before installation Remove lens by twisting counter clockwise. (FIG.1)

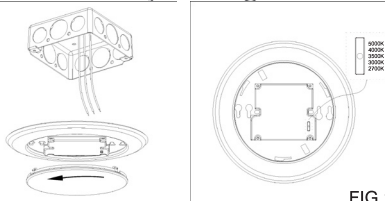


FIG.1

Switch to the most surface is 2700K, switch to the bottom is 5000K .The middle is 3000K,3500K, 4000K respectively (FIG. 2)




FIG.2

Connect supply wires to wires on fixture with wire nuts or push wires into Quick Connector.Connect white to white, black to black,and green wire to green wire as grounding connection.(FIG.3)




FIG.3

Arrange the wires into the back of the junction box.

Align appropriate holes in the mounting fixture with the holes in the junction box.Using 2 of the longer screws (either #6 or #8 screws depending on the size of the holes in your junction box) attach the mounting fixture is flush with the ceiling. Do not over-tighten screws or fixture will not be tight to ceiling.

Complete the installation by turn lens clockwise to lock. (FIG.4)

# LED Downlight Disk Installation Instructions




FIG.4

Once the fixture is mounted on the wall, caulk the space between the wall and the Shell. (FIG.5)




FIG.5