



Description

Emergency Driver For Led Lamps (With Internal/External Driver)

Illumination:

- Provides 180-320VDC (equals to 120-230VAC) to the load during emergency mode operation.
- For use with switched or unswitched fixtures.
- Can be used with LED lamp loads of up to 20W and provide 100% lumen output.

Electrical:

- Universal 120-277V, 50-60 Hz input.
- Charge/Power "ON" LED indicator light and push-to-test switch for mandated code compliance testing.
- Long-life, maintenance free, rechargeable NiCad battery.
- Output short/over current protection: Electronic limiting, with normal operation resuming upon removal of fault.
- 90 Minute minimum emergency operating time over full temperature range.
- 24 Hour maximum battery recharge time.

Housing:


- Durable painted steel construction in red finish.
- Provided with 2' flex conduits.

Warranty/Listing:


- UL Listed for factory or field installation.
- Suitable for damp locations (0°C - 50°C).
- 7 year warranty on all electronics and housing.
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local State codes.



Dimensions:

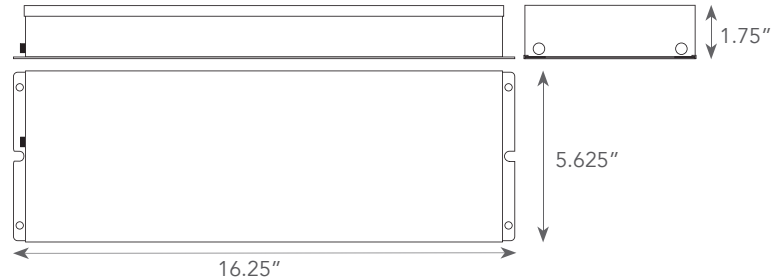

Wiring Diagram:

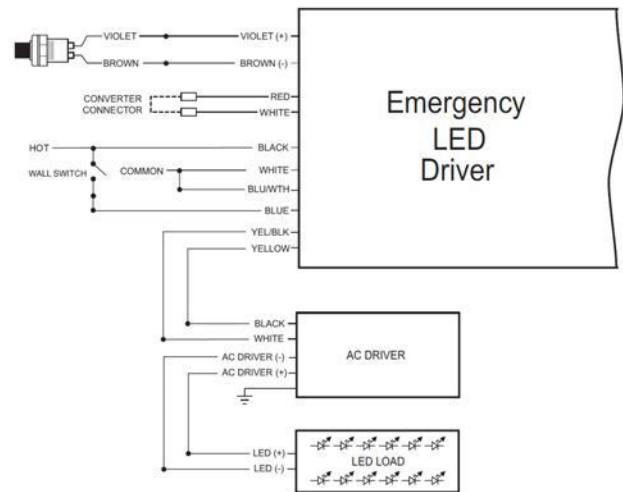



Project Name	
Catalog #	
Job Type	
Prepared By	
Notes	

Fixture Ordering Information

Part #	Wattage	Voltage
LL-BLEDEM-BP/DM-20	20	180-320