

## Features:

- Anti-corrosion, waterproof IP65
- Free blue light hazard, light efficiency up to 150LM/W
- Easy installation and wide application
- Patent Tunable Spectrum (USPN 9,820,447;10,159,198; CAPN (CA2994308C)
- Pure aluminum heatsink, low heat
- Various Spectrum and customization.

## Specifications:


Input Voltage	Operating Temperature
AC110-277V	-20°C to 40°C
Power	THD
12W-48W	<20%
Frequency	Efficacy
50/60Hz	150 lm/w
PPE	Lifespan
2.0 μmol/J	50,000 hrs
Power Factor	
> 0.95	

## Warranty/Listing:

- 5-year standard warranty.







## Dimensions:

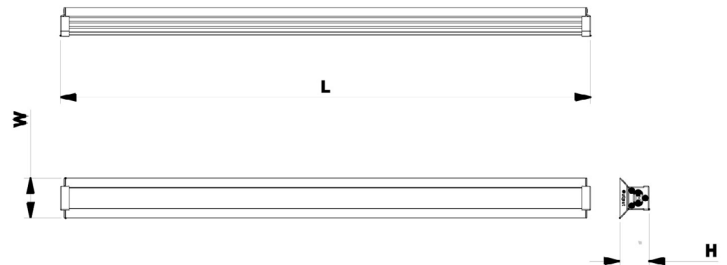

Wattage	L	W	H
12W	12"	1.8"	1.2"
18W	18.7"	1.8"	1.2"
24W	22.6"	1.8"	1.2"
36W	34.4"	1.8"	1.2"
48W	46.2"	1.8"	1.2"



# Electrical Data:

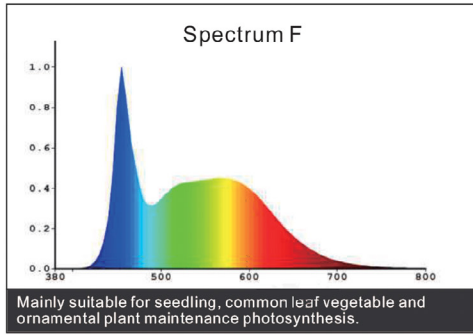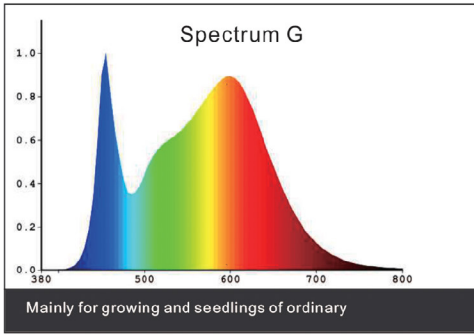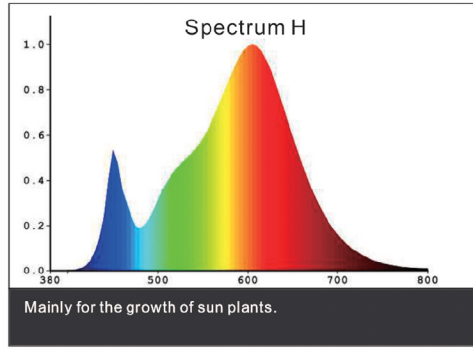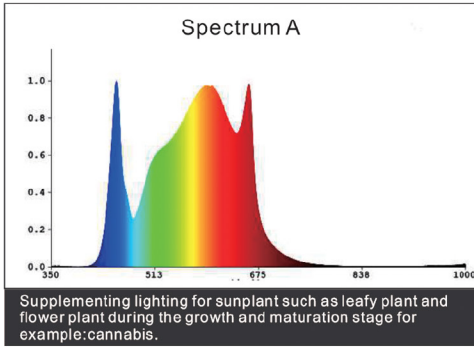



<b>Project Name</b>	
<b>Catalog #</b>	
<b>Job Type</b>	
<b>Prepared By</b>	
<b>Notes</b>	

### Fixture Ordering Information

<b>Model</b>	<b>Power</b>	
LL-CTT5	12	12W
	18	18W
	24	24W
	36	36W
	48	48W