




Installation Instructions

Please read the manual carefully before installation.

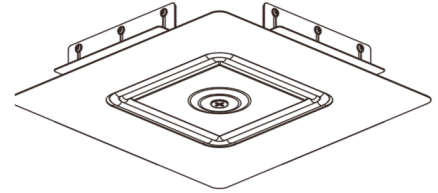

WARNING:

- Power off before installation.
- Please authorize only a qualified person or professional engineer to install the fixture.
- Before installation, please check if the local voltage range corresponds with working voltage of the fixture.
- If the fixture is damaged, it should be replaced by the supplier, a service agent or a qualified person.
- Please keep the fixture away from fire, electric shock, and vibration.

SAFETY INSTRUCTIONS

- All electrical work must conform to the National Electric Code (NEC) and all applicable local codes and ordinances.
- Only qualified personnel shall install and maintain the luminaires. Recommends that a licensed electrician install and maintain the luminaire. Verify the safety of existing power distribution system before beginning installation.
- FAILURE TO FOLLOW OPERATING INSTRUCTIONS MAY LEAD TO DEATH, SEVERE INJURY, OR PROPERTY DAMAGE.

WARNING

Turn off power before performing any electrical or control work. FAILURE TO FOLLOW THIS WARNING MAY LEAD TO DEATH, SEVERE INJURY, OR PROPERTY DAMAGE.

DO NOT make or alter any open holes in the luminaire. Do not modify the luminaire.

WARNING

Follow all applicable safety procedures and use Personal Protective Equipment such as hardhats, safety glasses, reflective vests, electrical safety gloves, fall protection equipment and safety toe boots during the installation, operation, and maintenance of the luminaire. FAILURE TO FOLLOW THIS WARNING MAY LEAD TO DEATH, SEVERE INJURY, OR PROPERTY DAMAGE.


WARNING

Risk of eye injury! Eye protection is required at all times during the installation, operation, and maintenance of the luminaire. The high intensity light produced by the luminaire can cause severe damage to the eye if viewed directly at close range. Avoid being in front of a luminaire that is on or wear suitable light blocking protective eyewear such as welding goggles.


Store luminaires in a clean, dry place, protected from dirt, water, and sunlight. See table for required storage and operating conditions:

Storage Temperature	Operating Temperature	Humidity
40°F to 167°F	-40°F to 122°F	5% to 95% non-condensing


Recessed Installation Frame

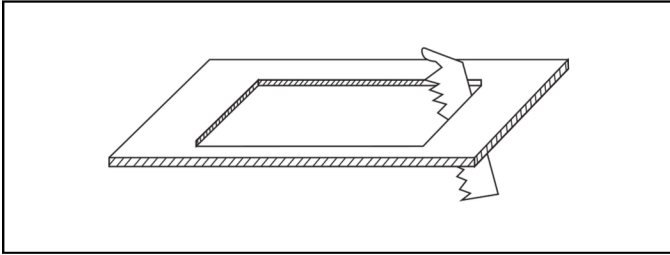


1. Drill a hole in the ceiling.
Hole Diameter: Max 390x390mm Min 370x370mm

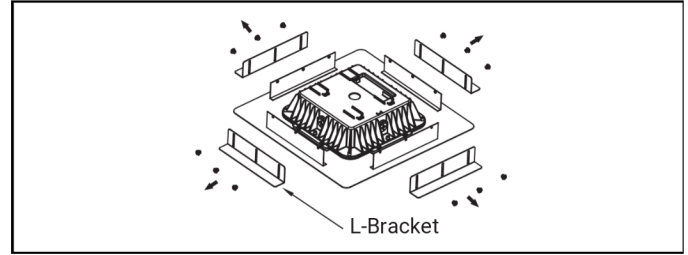

2. Loosen the screws with a Phillips screwdriver and remove the L-shaped bracket.

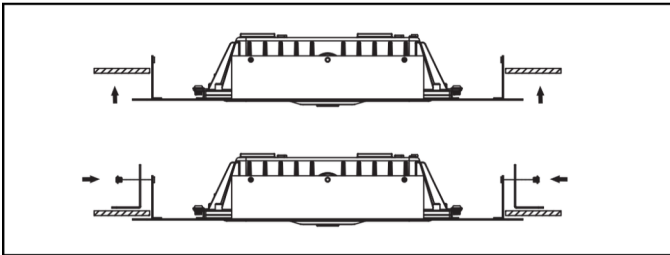

3. Install the fixture on the ceiling with the hole. Then fix the "L"- shaped bracket on the concealed bracket with screws from both sides of the ceiling, and adjust the distance between the concealed bracket and the ceiling.

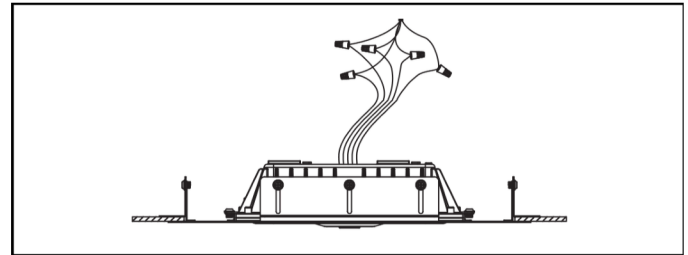

4. Connect the fixture wires to the utility wires, and the fixture installation is complete

Conventional Wiring Diagram

Universal voltage driver permits operation at 120V - 277V, 50 or 60 Hz.
For 0-10 Dimming, follow the wiring directions

1. Connect the Black/Brown fixture lead to the LINE supply lead.
2. Connect the White/Blue fixture lead to the COMMON supply lead.
3. Connect the Green/Yellow wire from the fixture to supply ground.
Do NOT connect GROUND of the dimming fixture to the output.
4. Connect the purple fixture lead to the DIM V+ lead.
5. Connect the pink fixture lead to the DIM V- lead.

