



Casambi Enabled DMX Controller



LL-DiMX

Casambi Enabled DMX Controller

DiMX is Casambi enabled wireless controller of up to 8 channels DMX-512 dimmer. DiMX enables the connection of DMX-512 Master controller to Casambi network. DiMX can be also used to be connected directly to DMX controlled fixtures and devices such as Lumemetix CMT and ALM, each device will be controlled individually through the Casambi App DiMX supports: RGB/RGBW/Tunable White/ HSL.



APP

DiMX can be controlled and configured by Casambi free App. Multiple DiMX devices can be used in the same area/network.



INSTALLATION

DiMX can be installed remotely or integrated in a fixtures. DiMX works with 12-36VDC class 2 power supply unit.

TECHNICAL INFORMATION

Input Power	DMX 512 Signal	Wire Type	Operating Temp	Radio Transceiver	Size (mm)
12-36VDC 35mA	D+/D-/Ground	14-22AWG	-20 - +45°C	2.401 - 2.483Ghz	61x29x13
Size (in)	Weight (g)	Control Device	Control App	Protocols	Installation
2.4x1.14x0.5	20	iOS device - iPod/iPhone/iPad Android 4.4 or later devices.	Casambi App	RGB/W & HSL	Remote or integrated

NOTE: DiMX is available without a plastic case upon request. Input cable connector included.

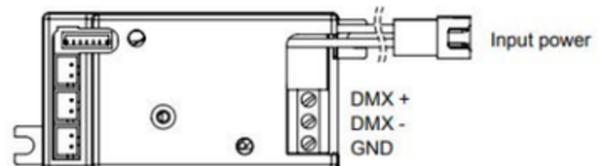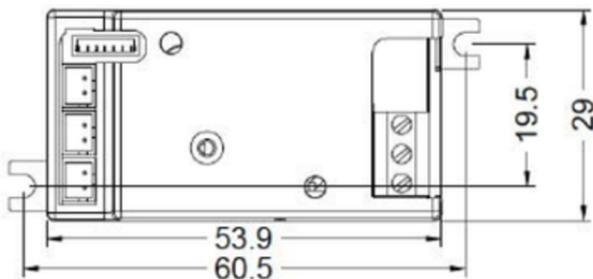



Casambi Enabled DMX Controller

PROJECT NAME	
CATALOG #	
JOB TYPE	
PREPARED BY	
NOTES	

ORDERING INFORMATION

Part #	Description
DiMX	Casambi Enabled DMX Controller