



## Description

Wet Location Led Exit Sign & Incandescent Emergency Polycarbonate Combo

## Illumination:

- Two fully adjustable 5.4 watt, glare-free incandescent lamp heads.
- High performance reflector and tempered glass lens for optimal light distribution.
- Ultra bright, energy efficient, long life Red or Green LED EXIT sign illumination.

## Electrical:

- Dual 120V/277 voltage,
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing.
- 6V Long life, maintenance-free, rechargeable NiCd battery.
- Internal solid-state transfer switch automatically connects the internal battery to LED board and LED lamp heads for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.

## Mounting:

- Mounting hardware provided for back surface wall mount.

## Housing:

- 5VA flame retardant, UV-stabilized polycarbonate gray finish.
- High-impact resistant, UV-stabilized polycarbonate clear lens
- Corrosion-resistant enclosure engineering grade silicone gasket.
- EZ snap-out Chevron directional indicators.
- Knockout's provided for conduit feed applications.

## Options:


- HTR: Optional internal heater for cold temperature (-9°C – 40°C) applications

## Warranty/Listing:

- Five year warranty on all electronics and housing. Battery prorated for five years.
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.



## Dimensions:

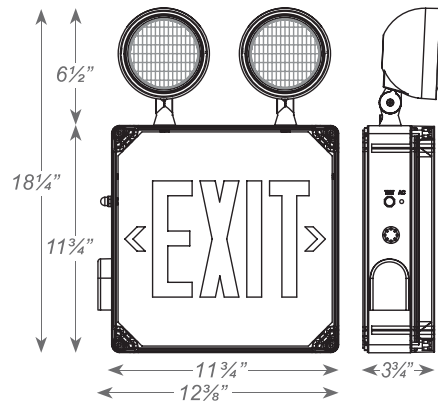



<b>Project Name</b>	
<b>Catalog #</b>	
<b>Job Type</b>	
<b>Prepared By</b>	
<b>Notes</b>	

## Fixture Ordering Information

<b>Model</b>	<b>No. of Faces</b>		<b>Letter Color</b>		<b>Battery</b>		<b>Options</b>	
LL-CWLXTE	blank	Single Face (standard)	R G	Red Green	EM	Battery Backup (standard)	HTR	Internal Heater