



Description

Led Exit & Incandescent Emergency Thermoplastic Combo

Illumination:

- Two fully adjustable 5.4W, glare-free lamp heads.
- Smooth thermoplastic reflector and plastic lens for optimal light distribution.
- Ultra bright, energy efficient, long life Red or Green LED EXIT sign illumination

Electrical:

- Dual 120V/277 voltage,
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing.
- LVD (low voltage disconnect) prevents battery from deep discharge.
- 6V Long life, maintenance-free, rechargeable NiCd battery.
- Internal solid-state transfer switch automatically connects the internal battery to LED board and LED lamp heads for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.

Mounting:

- EZ-snap mounting canopy included for top or end mount.
- Universal knockout pattern on back plate for wall mount.

Housing:

- Injection-molded, engineering grade, 5VA flame retardant, high-impact resistant, thermoplastic in white or black finish.
- EZ snap-out Chevron directional indicators.

Options:


- RC: Remote capacity of up to 11.0 watts.
- HTR: Optional internal heater for cold temperature (-9°C – 40°C) applications
- SDT: Self-diagnostic feature performs monthly, biannual, and annual tests to ensure reliable operation and meets electrical and life safety codes.
- USA: Substantial transformation assembly in the U.S. complies with "Assembled in the USA" under the Buy American Act.

Warranty/Listing:

- Five year warranty on all electronics and housing. Battery prorated for five years.
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.
- UL Listed for damp locations (20°C – 40°C).
- Certified to CEC under Title 20 Regulations.
- Meets CSA C22.2 No. 141-02 requirements for unit equipment.



Dimensions:

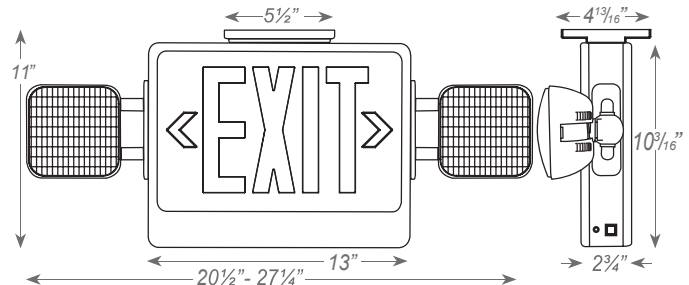



Project Name	
Catalog #	
Job Type	
Prepared By	
Notes	

Fixture Ordering Information

Model	No. of Faces		Letter Color		Housing Color		Options	
	LL-CXTEU	2	Universal Single/ Double Face	R G	Red Green	W B	White Black	RC HTR SDT USA

¹Not available with RC units