

Litelume LED High Bay Linear All Purpose Adjustalume Series



*Not all product variations listed on this page are DLC qualified. Visit www.designlights.org/ search to confirm qualification

The LITELUME™ High Bay Linear All Purpose (LL-HBLAP) Adjustalume Series features an all new aluminum alloy design with white powder coat finish. Featuring selectable wattage and CCT with optional plug and play design PIR motion sensor and Emergency battery backup accessory, this highbay is stocked for fast delivery. The HBLAP is designed for gymnasiums, factories and general warehouse lighting applications.

PRODUCT FEATURES

Fixture Information

Size:	90W/130W/175W/210W/270W/300W
Housing:	Aluminum Alloy
Finish:	Protective powder coat
Color:	Color: Standard: White
Lens:	Semi Frosted Polycarbonate
Temperature:	-40°F to +113°F
Mounting:	Standard: 60" Air Craft Cable Set Optional: Center Mounting Box
Voltage:	Standard: 120-277V Optional: 480V
CRI:	70
Power Factor:	>.95
Sensor:	Standard: No sensor Optional: PIR Bi-Level motion sensor
Dimmable:	Standard: 0-10v continuous, 12Vdc auxiliary dimming
Warranty:	10-Year Limited Warranty

Performance Data

Lumen Output:

12,700 to 41,500 lm

Lumens Per Watt (typical):

140 lm/W

CCT:

4000K

5000K

Distribution:

HB

Lifespan:

Features 3030 LED's with up to 100,000 running hours

Ratings & Certificates


UL Listed For Damp Location
TAA Compliant

Litelume LED High Bay Linear All Purpose Adjustalume Series




Dimension

Item	Height (H)	Width (W)	Length (L)
90W/130W/175W/210W SELECTABLE	1.75"	9.85"	23.62"
90W/130W	1.75"	9.84"	16.54"
175W/210W	1.75"	9.84"	23.62"
270W/300W	1.75"	9.84"	35.43"

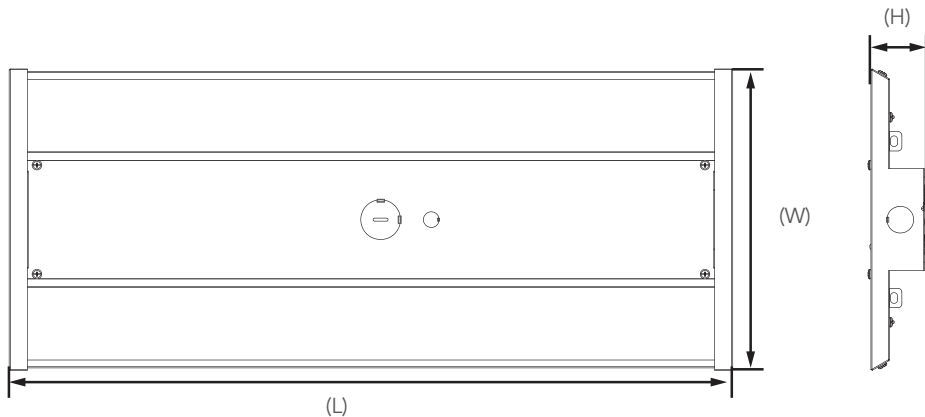

Features*


Selectable version shown below

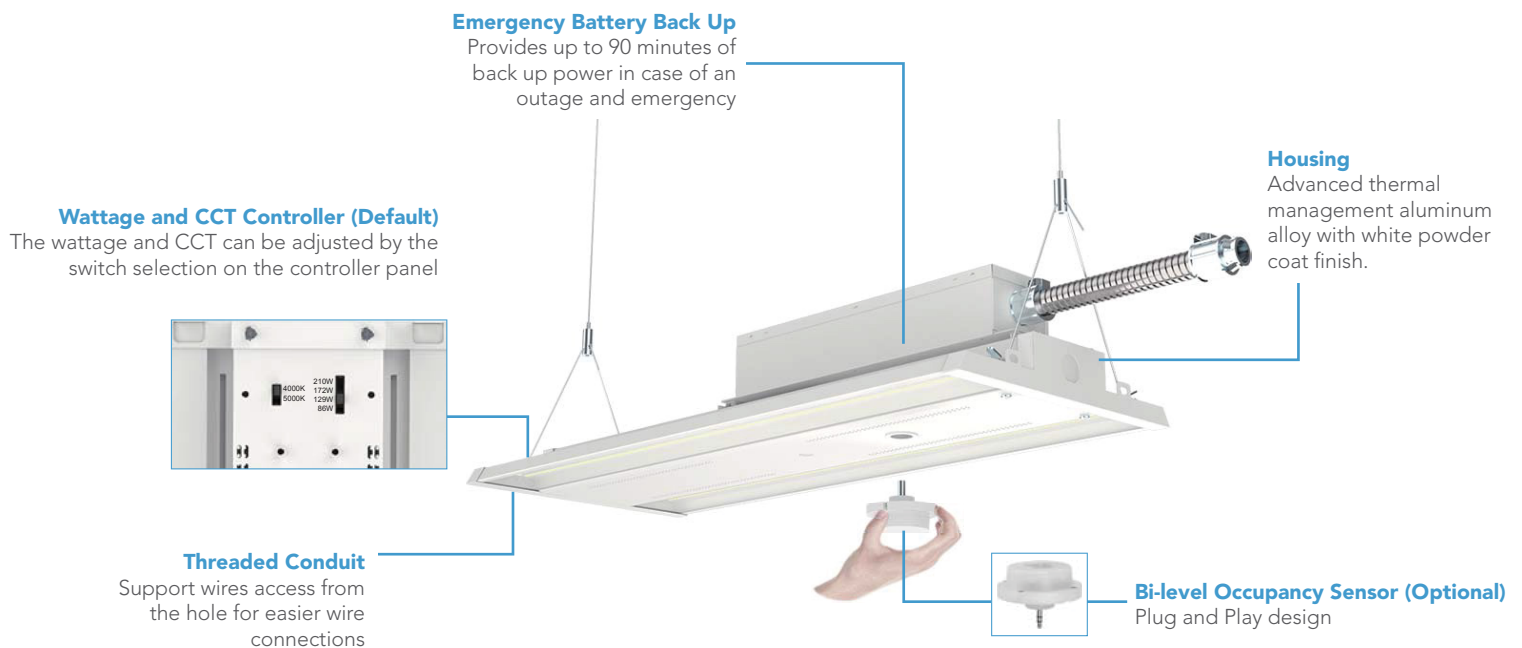

Litelume LED High Bay Linear All Purpose Adjustalume Series



Photometrics



Accessories

Wire Guard	Emergency Battery
Motion Sensor	Center Mounting Box

Litelume LED High Bay Linear All Purpose Adjustalume Series



Project Name	
Catalog #	
Job Type	
Prepared By	
Notes	

Fixture Ordering Information

Part #	Wattage	Lumens	CCT	Voltage	Distribution
LL-HBLAP-90-50-UNV-WH	90	12700	5000	120-277	HB
LL-HBLAP-90-40-UNV-WH	90	12700	4000	120-277	HB
LL-HBLAP-130-50-UNV-WH	130	18600	5000	120-277	HB
LL-HBLAP-130-40-UNV-WH	130	18600	4000	120-277	HB
LL-HBLAP-175-50-UNV-WH	175	25300	5000	120-277	HB
LL-HBLAP-175-40-UNV-WH	175	25300	4000	120-277	HB
LL-HBLAP-210-50-UNV-WH	210	30600	5000	120-277	HB
LL-HBLAP-210-40-UNV-WH	210	30600	4000	120-277	HB
LL-HBLAP-270-50-UNV-WH	270	37000	5000	120-277	HB
LL-HBLAP-270-40-UNV-WH	270	37000	4000	120-277	HB
LL-HBLAP-300-50-UNV-WH	300	41500	5000	120-277	HB
LL-HBLAP-300-40-UNV-WH	300	41500	4000	120-277	HB
LL-HBLAP-[90][130][175][210]-2CCT-UNV-WH	90W/130W/175W/210W	12000/18000/24000/30000	4000K 5000K	120-277	HB

Accessories Ordering Information

Part #	Description
ANT-5-4T	Sharkward 12-24V DC 0-10V Plug And Play Microwave Sensor ** LL-HBLAP-[90][130][175][210]-2CCT-UNV-WH ONLY
ANT-6-4T	Sharkward 12-24V DC 0-10V Plug And Play PIR Sensor ** LL-HBLAP-[90][130][175][210]-2CCT-UNV-WH ONLY
ANT-6-4T-BLE-SR	Sharkward Silvair 12-24V DC 0-10V Plug And Play Bluetooth PIR Sensor ** LL-HBLAP-[90][130][175][210]-2CCT-UNV-WH ONLY
ANT-6-4T-BLE-GE	Homewell Gebc 12-24V DC 0-10V Plug And Play Bluetooth PIR Sensor ** LL-HBLAP-[90][130][175][210]-2CCT-UNV-WH ONLY
RC-100	Remote Control 100
AC-EFS106-AUX-W.B1-WH-BL1-2-B	Autani Compatible - Keilton EFS106-AUX-W.B1 Plug And Play Bluetooth Daylight Harvesting And PIR Motion Sensor & WH-BL1-2-B Lens LLLC
AC-WPPA102-AUX-W.B1	Autani Compatible - Keilton Plug And Play Bluetooth Long Range Controller Node LLLC
BRI823-B-D	Sharkward 120-277V 0-10V PIR Sensor **FOR SINGLE WATTAGE/KELVIN ONLY
WG-HBLAP	Wire Guard *90W/130W/175W/210W SELECTABLE
CMB-HBLAP	Center mounting box for HBLAP
SUB "UNV" WITH "480"	480 Volt
EM8	Emergency battery backup 8W
EM16	Emergency battery backup 16W

Buy American Act Compliant Ordering Information

Part #	Description
BAA-HBLAP	Buy American Act Compliant For Highbay Linear All Purpose Series

* Please contact LITELUME for all Custom Option Requests