




Surface Mount Panel



LL-SMP

Surface Mount Panel

The LITELUME™ LED Surface Mount Panel (LL-SMP) luminaire offers a new slim design with easy installation for retrofit or new construction. This architectural fixture adopts the latest in optical and LED technology providing an evenly pleasant illuminance. Featuring Selectable Power 4 level lumen output and Selectable Color Temperature 2700k, 3000k, 3500k, 4000k and 5000k, allowing for customized energy savings and comfortability. Controls ready.

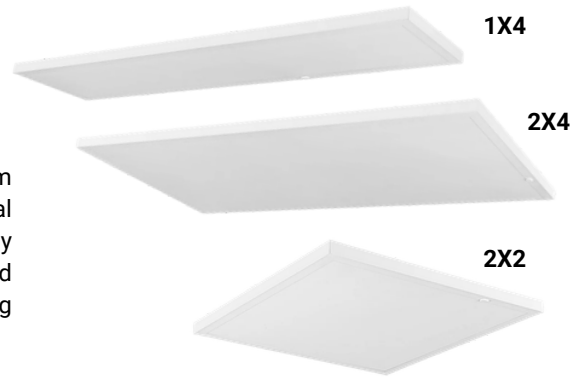

PERFORMANCE DATA

Lumen Output	2833 - 6514 lm
Lumens Per Watt (typical)	130 lm/W
CCT	2700K 3000K 3500K 4000K 5000K
Lifespan	60,000 Hours at 70% Lumen Maintenance Rated Life

RATINGS & CERTIFICATES

UL Listed • Damp Rated

APPLICATIONS

Offices • Hallways • Conference Rooms
Schools • Stores • Multi-Purpose Rooms

FIXTURE INFORMATION


Size	Color	Mounting				LED Type	Beam Angle
20W - 50W	White	Low Profile 1.2", Surface Mount Ready				SMD2835	113°
Voltage	Dimming	CRI	PF	THD	IC Rating	Driver Efficacy	Warranty
120-277V	0-10V Continuous 12Vdc Auxiliary	80	.98	<20%	Type IC	>90%	10 Year

Operating Temperature: -4°F~113°F




Surface Mount Panel

CONTROL MODULE

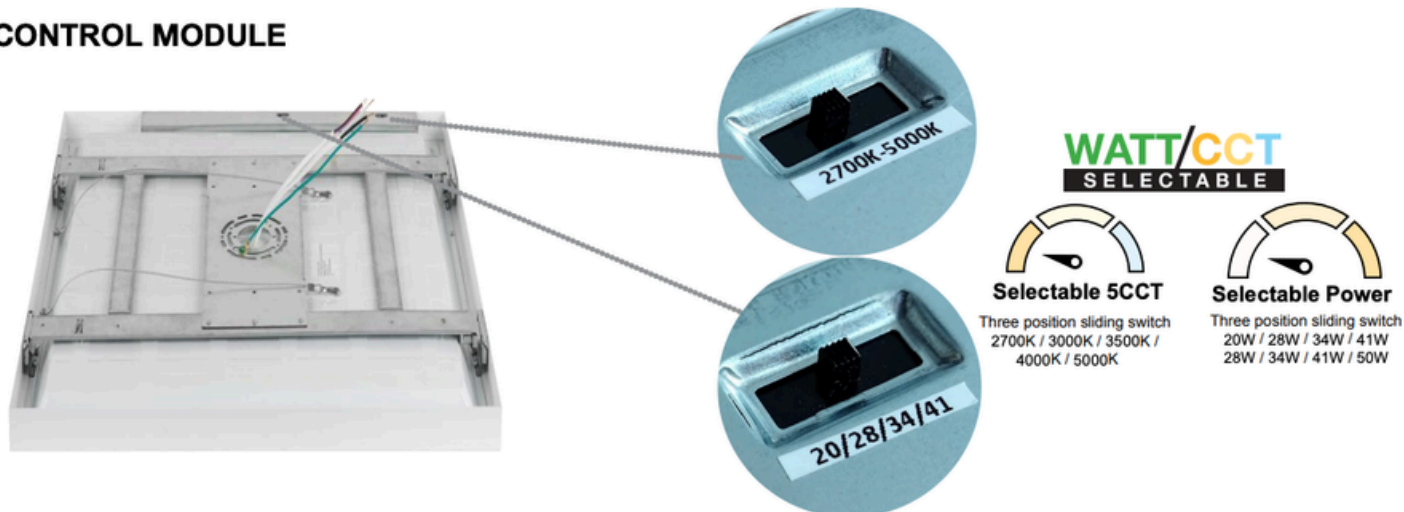


DIMENSIONS


1X4

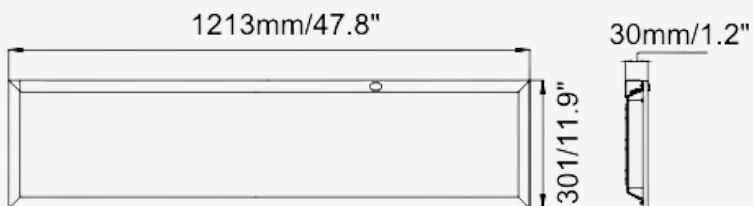

2X4

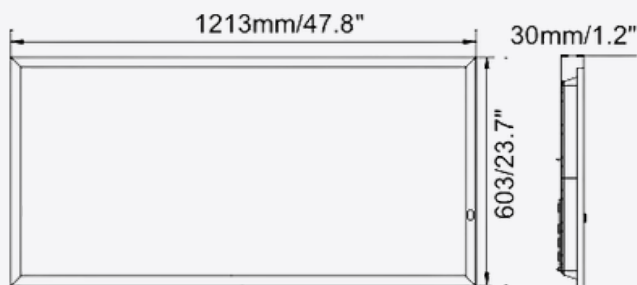

2X2

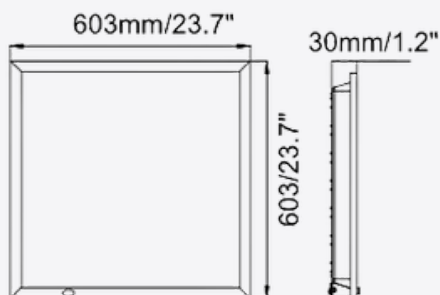



Surface Mount Panel

Multiple sensor solutions ready

- Quick and easy in-field installation of sensors.



- Integrated occupancy and daylight controls.



The sensor receptacle is pre-embedded in the profile frame.


ACCESSORIES

Conduit	MF6183 6' 3/8" Metal Flexible Conduit with 18 Gauge 3 Conductor
	MF6185 6' 3/8" Metal Flexible Conduit with 18 Gauge 5 Conductor
	MF6186 6' 3/8" Metal Flexible Conduit with 18 Gauge 6 Conductor for Emergency Battery Backup
Emergency	EML8-F Emergency Battery Backup, 8W, 90 Minutes "Field Installed"
	EML15-F Emergency Battery Backup, 15W, 90 Minutes "Field Installed"
	EML20-F Emergency Battery Backup, 20W, 90 Minutes "Field Installed"
Controls	ANT-1P-4T Sharkward 12-24V DC 0-10V Plug and Play PIR Sensor
	ANT-1P-5T Sharkward 10-14V DC 0-10V PIR Motion Sensor
	RC-100 Remote Control 100
	ANT-1P-4T-BLE-SR Sharkward Silvar 10-14V DC 0-10V Plug and Play Bluetooth PIR Sensor
	ANT-1P-4T-BLE-GE Homewell GEBC 10-14V DC 0-10V Plug and Play Bluetooth PIR Sensor
	ANT-1P-5T-BLE-GE Homewell GEBC 10-14V DC 0-10V Bluetooth PIR Sensor
	ANT-1P-5T-BLE-SR Silvar 10-14V DC 0-10V Bluetooth PIR Sensor
	BRI-WS204-GE Homewell GEBC 4-Button Wireless Wall Switch, Battery Powered, Wall Plate Included
	AC-IFS108-AUX.B1 Autani Compatible - Keilton IFS108 Integrated Bluetooth Daylight Harvesting and PIR Motion Sensor LLLC




PHOTOMETRICS


LL-SMP-14-5L-UNV-SCT-SP

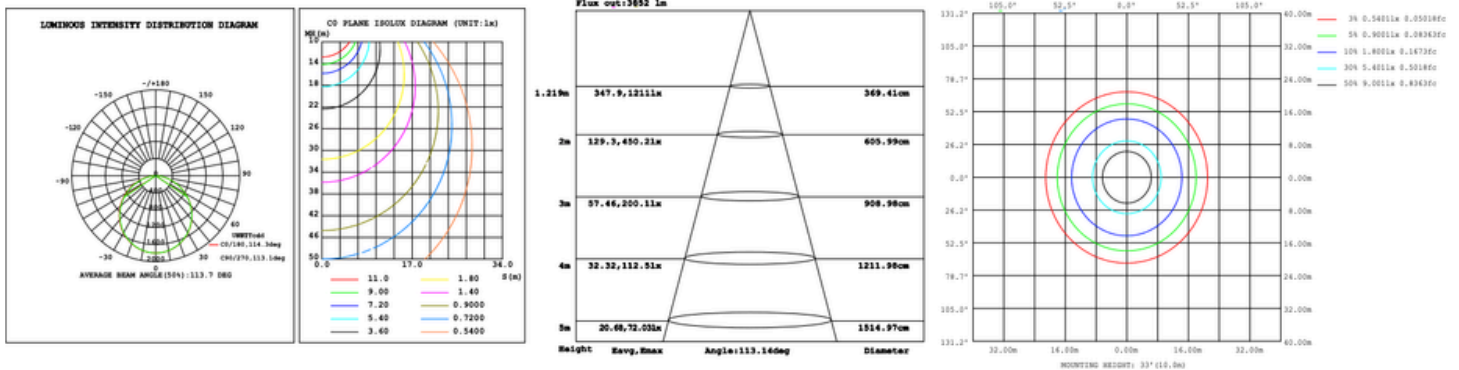

LL-SMP-22-5L-UNV-SCT-SP

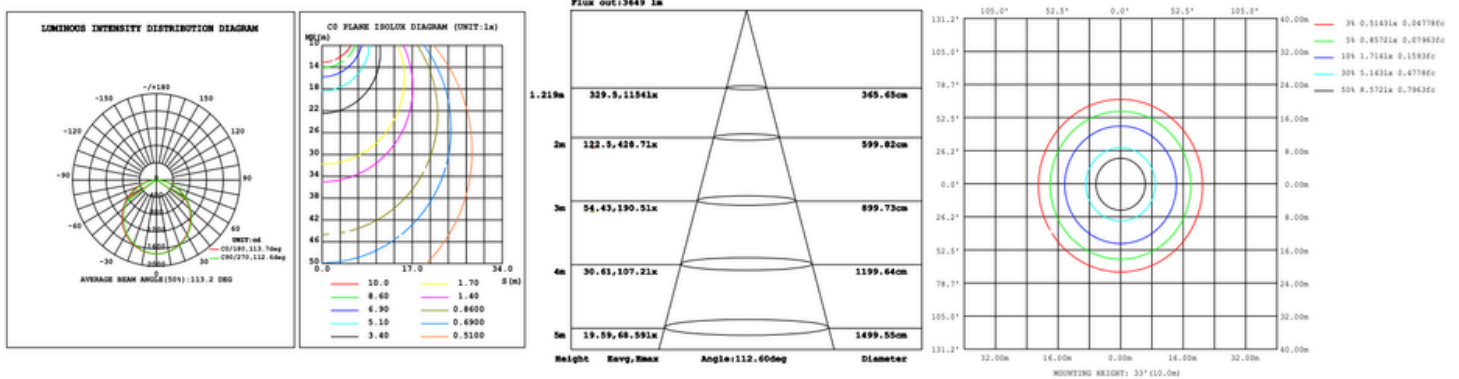

LL-SMP-24-6L-UNV-SCT-SP

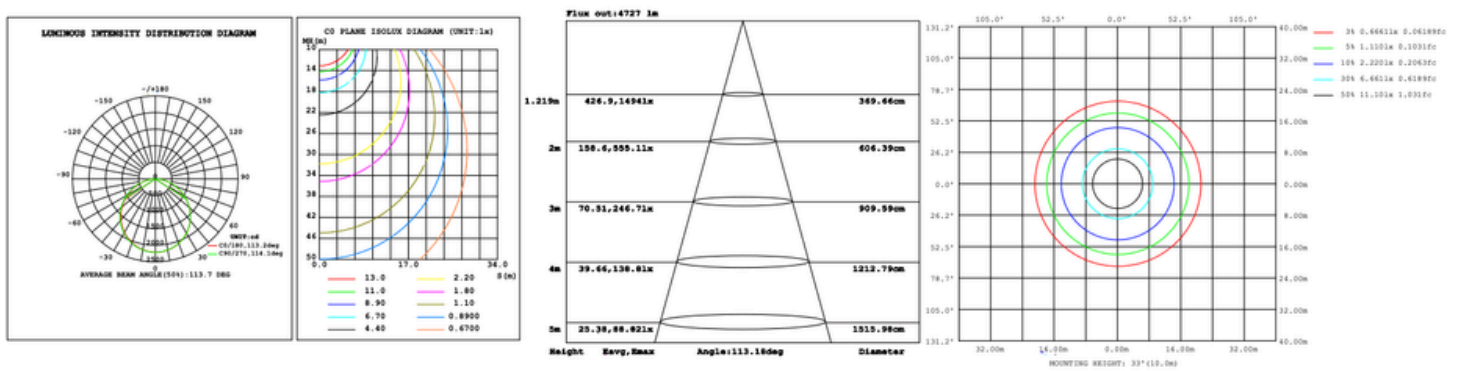



Surface Mount Panel

PROJECT NAME	
CATALOG #	
JOB TYPE	
PREPARED BY	
NOTES	

ORDERING GUIDE

Brand	Fixture Type	Size	Voltage
LL LITELUME	SMP Surface Mount Panel	14 1X4 22 2X2 24 2X4	UNV 120-277V
Lumen Package	CCT	Power	
5L 5000 Lumens 6L 6000 Lumens	SCT Selectable Color Temperature	SP Selectable Power	

Accessories

ANT-1P-4T Sharkward 12-24V DC 0-10V Plug and Play PIR Sensor
ANT-1P-5T Sharkward 10-14V DC 0-10V PIR Motion Sensor
RC-100 Remote Control 100
ANT-1P-4T-BLE-SR Sharkward Silvair 10-14V DC 0-10V Plug and Play Bluetooth PIR Sensor
ANT-1P-4T-BLE-GE Homewell GEBC 10-14V DC 0-10V Plug and Play Bluetooth PIR Sensor
ANT-1P-5T-BLE-GE Homewell GEBC 10-14V DC 0-10V Bluetooth PIR Sensor
ANT-1P-5T-BLE-SR Silvair 10-14V DC 0-10V Bluetooth PIR Sensor
BRI-WS204-GE Homewell GEBC 4-Button Wireless Wall Switch, Battery Powered, Wall Plate Included
AC-IFS108-AUX.B1 Autani Compatible - Keilton IFS108 Integrated Bluetooth Daylight Harvesting and PIR Motion Sensor LLLC
MF6183 6' 3/8" Metal Flexible Conduit with 18 Gauge 3 Conductor
MF6185 6' 3/8" Metal Flexible Conduit with 18 Gauge 5 Conductor
MF6186 6' 3/8" Metal Flexible Conduit with 18 Gauge 6 Conductor for Emergency Battery Backup
EML8-F Emergency Battery Backup, 8W, 90 Minutes "Field Installed"
EML15-F Emergency Battery Backup, 15W, 90 Minutes "Field Installed"
EML20-F Emergency Battery Backup, 20W, 90 Minutes "Field Installed"



Surface Mount Panel

FIXTURE ORDERING INFORMATION

Part #	Watts	Lumens	Kelvin	Voltage
LL-SMP-14-5L-UNV-SCT-SP	20W / 28W / 34W / 41W	2833/4061/4563/5288	5 CCT	120-277
LL-SMP-22-5L-UNV-SCT-SP	20W / 28W / 34W / 41W	2600/3784/4279/5023	5 CCT	120-277
LL-SMP-24-6L-UNV-SCT-SP	28W / 34W / 41W / 50W	4018/4537/5271/6514	5 CCT	120-277

ACCESSORIES ORDERING INFORMATION

Part #	Description
ANT-1P-4T	Sharkward 12-24V DC 0-10V Plug and Play PIR Sensor
ANT-1P-5T	Sharkward 10-14V DC 0-10V PIR Motion Sensor
RC-100	Remote Control 100
ANT-1P-4T-BLE-SR	Sharkward Silvoir 10-14V DC 0-10V Plug and Play Bluetooth PIR Sensor
ANT-1P-4T-BLE-GE	Homewell GEBC 10-14V DC 0-10V Plug and Play Bluetooth PIR Sensor
ANT-1P-5T-BLE-GE	Homewell GEBC 10-14V DC 0-10V Bluetooth PIR Sensor
ANT-1P-5T-BLE-SR	Silvoir 10-14V DC 0-10V Bluetooth PIR Sensor
BRI-WS204-GE	Homewell GEBC 4-Button Wireless Wall Switch, Battery Powered, Wall Plate Included
AC-IFS108-AUX.B1	Autani Compatible - Keilton IFS108 Integrated Bluetooth Daylight Harvesting and PIR Motion Sensor LLLC
MF6183	6' 3/8" Metal Flexible Conduit With 18 Gauge 3 Conductor
MF6185	6' 3/8" Metal Flexible Conduit With 18 Gauge 5 Conductor
MF6186	6' 3/8" Metal Flexible Conduit With 18 Gauge 6 Conductor for Emergency Battery Backup
EML8-F	Emergency Battery Back Up, 8W, 90 Minutes "Field Installed"
EML15-F	Emergency Battery Back Up, 15W, 90 Minutes "Field Installed"
EML20-F	Emergency Battery Back Up, 20W, 90 Minutes "Field Installed"