



## Description

LED Reduced Profile Thermoplastic Emergency Unit

## Illumination:

- Long lasting, efficient, ultra bright white LED lamp heads.
- 1.5 watt (3 LEDs x 0.50 watt) per head.
- Unique all-inclusive lamp, reflector and lens assembly.
- Adjustable LED lamp heads provide up to 30-ft center-to-center spacing with 3-ft path of egress at 10-ft mounting height.

## Electrical:

- Dual 120/277 voltage
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing.
- 3.6V long life, maintenance-free, rechargeable NiCd battery.
- Internal solid-state transfer switch automatically connects the internal battery to LED lamp heads for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.

## Mounting:

- Universal knockout pattern on back plate for surface mount.
- Knockouts provided for conduit feed applications.
- Suitable for wall or ceiling mount.

## Housing:

- Injection-molded, engineering grade, 5VA flame retardant, high impact resistant, thermoplastic in white or black finish.

## Warranty/Listing:



- RC: Remote capacity of 2.5 watts.
- SDT: Self-diagnostic feature performs monthly, biannual, and annual tests to ensure reliable operation and meets electrical and life safety codes.

## Warranty/Listing:

- Five year warranty on all electronics and housing. Batteries pro rated for five years.
- UL Listed for damp locations (10°C – 50°C).
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes
- Certified to CEC under title 20 regulations.



## Dimensions:

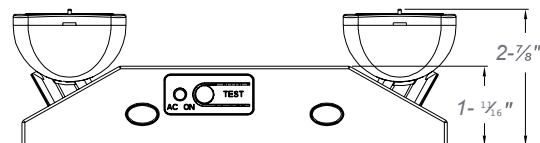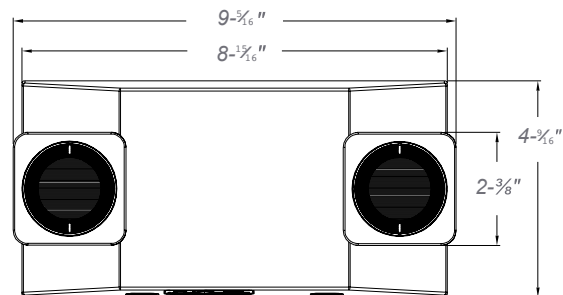



<b>Project Name</b>	
<b>Catalog #</b>	
<b>Job Type</b>	
<b>Prepared By</b>	
<b>Notes</b>	

### Fixture Ordering Information

Model	Housing Color		Options	
LL-EM	W B	White Black	RC SDT	Remote Control Self Diagnostics