Installation Instructions

Read these instructions carefully before installation and save them for future reference.


IMPORTANT NOTES

- Fixtures must be wired in accordance with the national electrical code and all applicable local codes. Proper grounding is required for safety.
- This product must be installed in accordance with the applicable installation code by a qualified electrician who is familiar with the construction and operation of the product and the hazards involved.

WARNING: RISK OF FIRE, ELECTRIC SHOCK OR PERSONAL INJURY. Before installation, turn power off.

- **WARNING:** Risk of fire or electric shock. Luminaire installation requires knowledge of luminaires and electrical systems. If not qualified, DO NOT try to install. Please contact an electrician.
- **WARNING:** Risk of fire or electric shock. Suitable for wet locations. Please turn off the power before installation.
- **WARNING**: Risk of fire or electric shock. Suitable for non-insulated surface and frame. DO NOT cover fixture with insulation liner or similar material.
- **WARNING:** DO NOT install in unstable, loose or breakable surfaces.
- **WARNING:** DO NOT let objects impact or exert force on the surface of the fixture.
- **WARNING:** To Reduce The Risk Of Ignition Of Hazardous Atmospheres, Disconnect The Luminaire From The AC Supply Circuit And Determine That The Area Is Free Of Ignitable Concentration Before Opening. Keep Tightly Closed When In Operation.

WIRING DIAGRAM

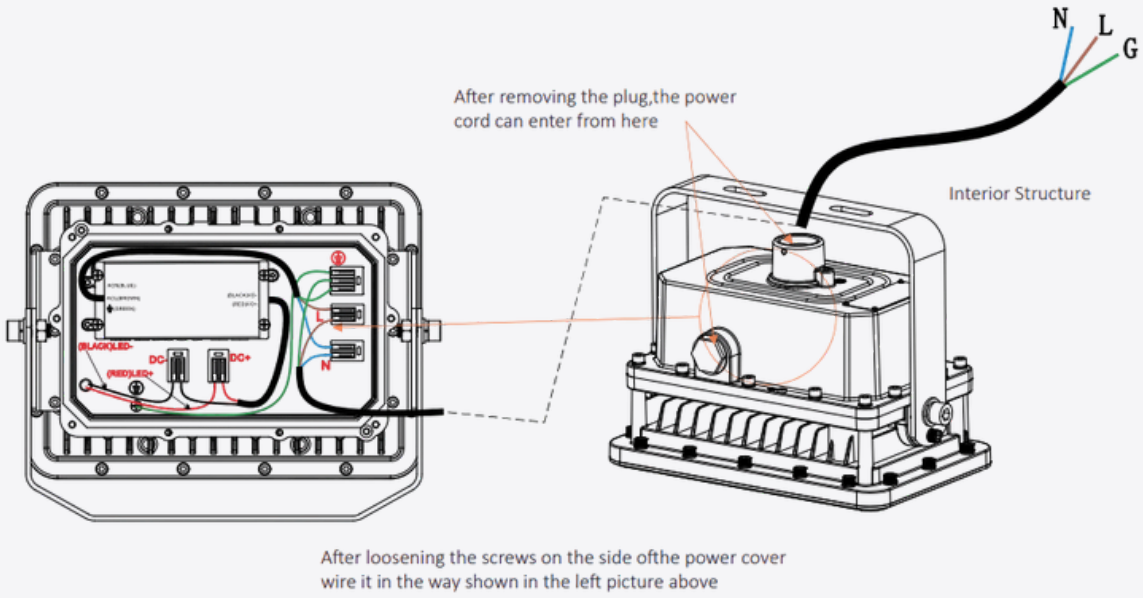


©Lite Lume Corporation 2018
www.litelume.com
info@litelume.com
833.LED.LUME

LITELUME™ seeks to deliver the most advanced and efficient LED technology. Due to technology progression, specifications may change. We reserve the right to update product specifications without notice. Contact LITELUME™ for the most up-to-date data.

INSTALLATION AND ELECTRICAL CONNECTION


Ceiling Mount (Included)

step 1

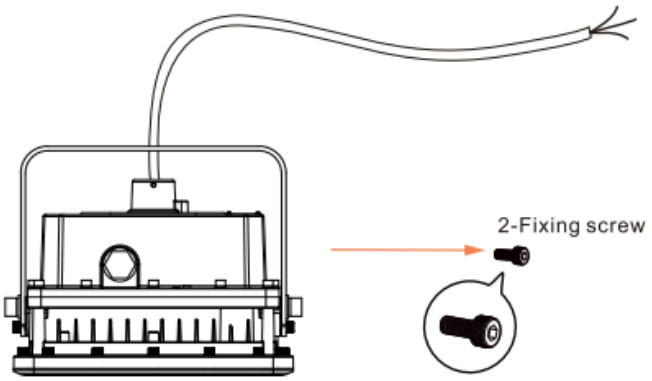


Take the fixture and accessory out from carton box,tighten 2x angle holder screw as Fig.1.

step 2

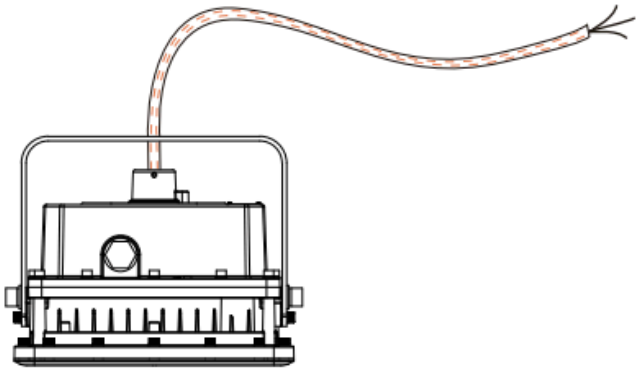


Flexible metal conduit install and tighten with the fixture.

step 3

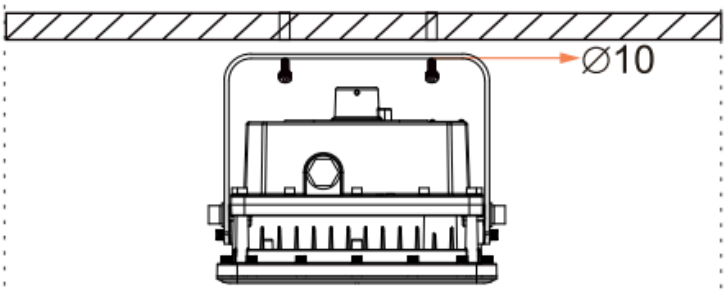

Drill 2x hole as Fig.2, the distance can be 113-167mm,fixing Ø10 expansion screws and bracket on ceiling.

step 4

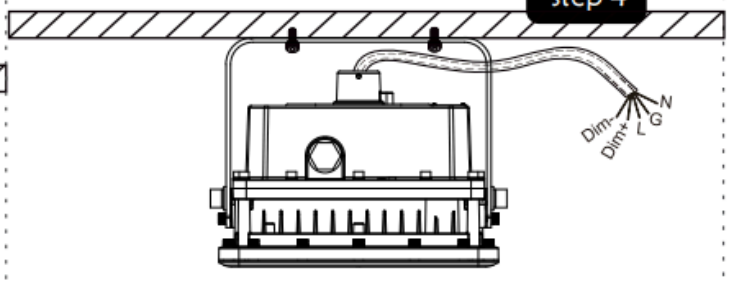

L
N
G
Dim+
Dim-


Connect the AC cable to power supply, black to L,white to N, green to G, purple to Dim+, pink to Dim-.

LITELUME™ seeks to deliver the most advanced and efficient LED technology. Due to technology progression, specifications may change. We reserve the right to update product specifications without notice. Contact LITELUME™ for the most up-to-date data.

INSTALLATION AND ELECTRICAL CONNECTION


Wall Mount (Included)

step 1

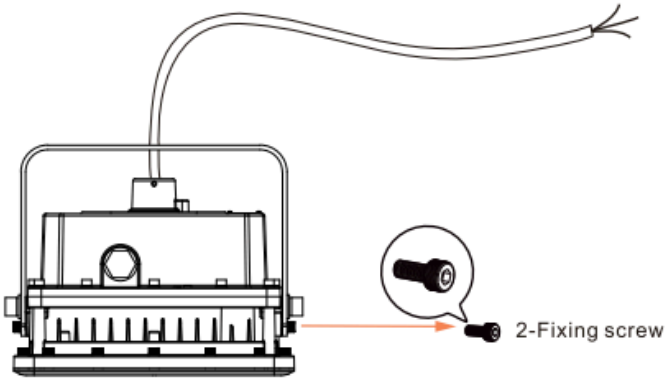


Take the fixture and accessory out from carton box, tighten 2x angle holder screw as Fig.1.

step 2

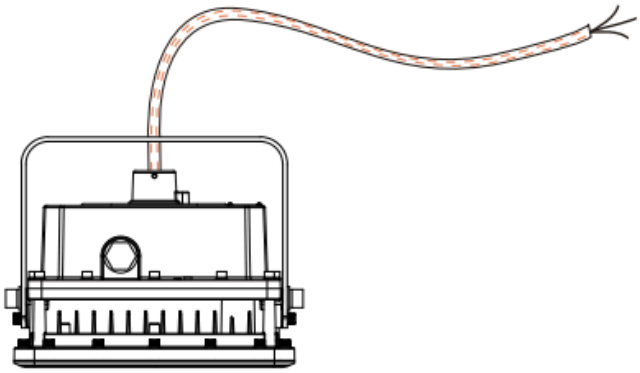


Flexible metal conduit install and tighten with the fixture.

step 3

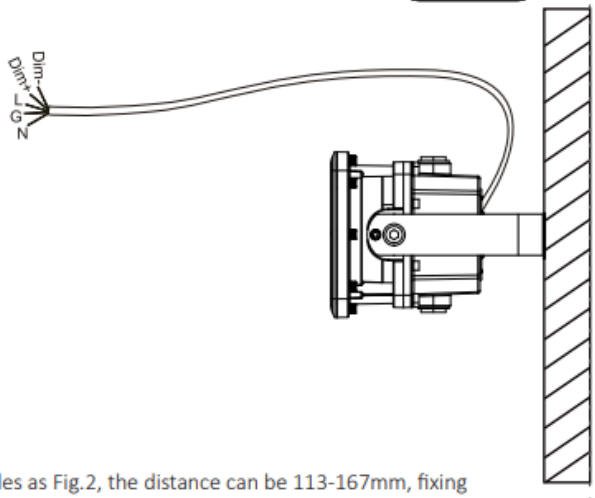

Drill 2x holes as Fig.2, the distance can be 113-167mm, fixing 010 expansion screw and bracket on.

step 4

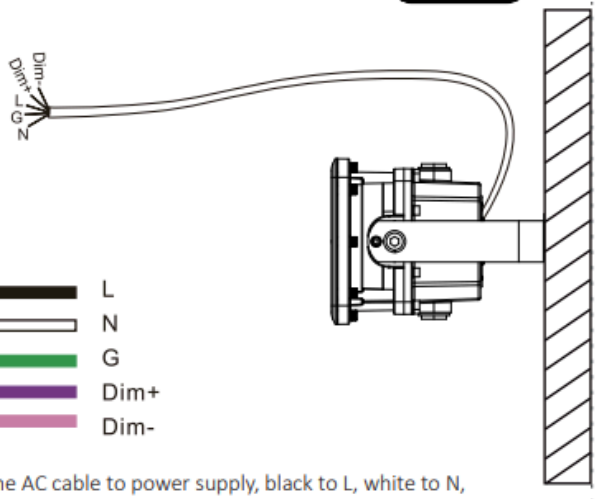


Connect the AC cable to power supply, black to L, white to N, green to G, purple to Dim+,pink to Dim-.

LITELUME™ seeks to deliver the most advanced and efficient LED technology. Due to technology progression, specifications may change. We reserve the right to update product specifications without notice. Contact LITELUME™ for the most up-to-date data.

INSTALLATION AND ELECTRICAL CONNECTION


Pendant and Stanchion Mount

step 1

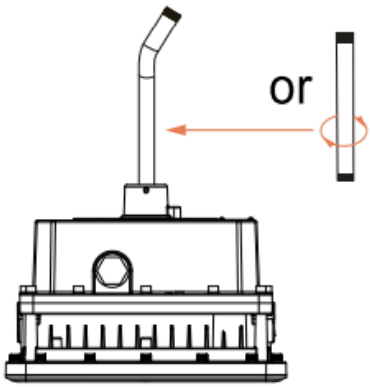


Take the fixture and pole accessory out from carton box, tighten pole as Fig.1.(Linear pole)

step 2

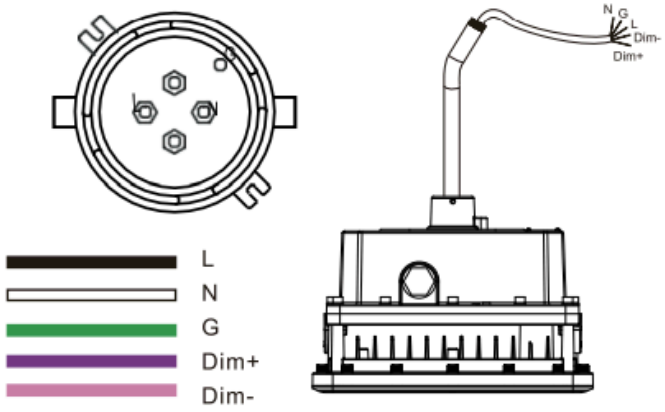


Connect the AC cable to power supply, black to L, white to N, green to G, purple to Dim+,pink to Dim-.

step 3

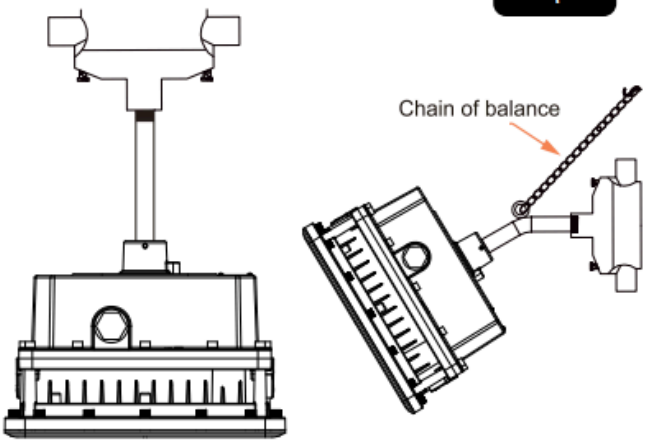

Install the installation box to the wall or ceiling as Fig.2. Tighten the pole to the box, and adjust the chain of balance.

step 4

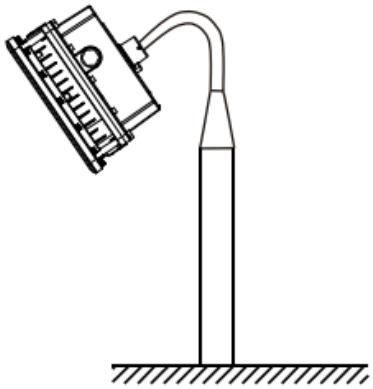

Install the fixture to the pole after cable connecting

LITELUME™ seeks to deliver the most advanced and efficient LED technology. Due to technology progression, specifications may change. We reserve the right to update product specifications without notice. Contact LITELUME™ for the most up-to-date data.