



Description

LED Fixed Optics Thermoplastic Emergency Unit

Illumination:

- Long life, efficient, ultra bright white LED lamp heads.
- Two fixed, 2.0 watt LED lamp heads.
- High performance, chrome-plated metalized reflector and plastic lens for optimal light distribution.

Electrical:

- Dual 120/277 voltage
- Charge rate/power "ON" LED indicator light and magnetic test switch for mandated code compliance testing.
- 3.6V long life, maintenance-free, rechargeable NiCd battery.
- Internal solid-state transfer switch automatically connects the internal battery to LED lamp heads for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.

Mounting:

- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.
- Suitable for wall or ceiling mount.

Housing:


- Injection-molded, engineering grade, 5VA flame retardant, high-impact resistant, thermoplastic in white or black finish.

Warranty/Listing:

- Five year warranty on all electronics and housing. Battery prorated for five years.
- Meets UL924, NFPA101 Life Safety Code, NEC, OSHA, Local and State Codes.
- CSA Listed to UL 924 standards for damp locations (0°C – 40°C).



Dimensions:

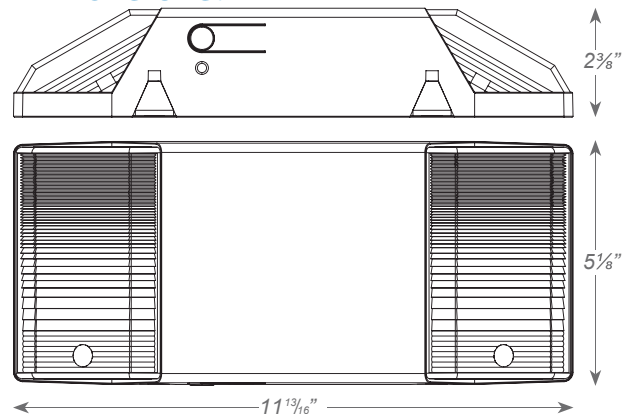



Project Name	
Catalog #	
Job Type	
Prepared By	
Notes	

Fixture Ordering Information

Model	Housing Color	
LL-FLED R2	(blank) B	White Black