

# Litelume LED High Bay Linear All Purpose Adjustalume Series



\*Not all product variations listed on this page are DLC qualified. Visit [www.designlights.org/](http://www.designlights.org/) search to confirm qualification



The LITELUME™ High Bay Linear All Purpose (LL-HBLAP) Adjustalume Series features an all new aluminum alloy design with white powder coat finish. Featuring selectable wattage and CCT with optional plug and play design PIR motion sensor and Emergency battery backup accessory, this highbay is stocked for fast delivery. The HBLAP is designed for gymnasiums, factories and general warehouse lighting applications.

## PRODUCT FEATURES

### Fixture Information

Size:	90W/130W/175W/210W/270W/300W
Housing:	Aluminum Alloy
Finish:	Protective powder coat
Color:	Color: Standard: White
Lens:	Semi Frosted Polycarbonate
Temperature:	-40°F to +113°F
Mounting:	Standard: 60" Air Craft Cable Set Optional: Center Mounting Box
Voltage:	Standard: 120-277V Optional: 480V
CRI:	70
Power Factor:	>.95
Sensor:	Standard: No sensor Optional: PIR Bi-Level motion sensor
Warranty:	7-Year Limited Warranty

### Performance Data

#### Lumen Output:

12,700 to 41,500 lm

#### Lumens Per Watt (typical):

140 lm/W

#### CCT:

4000K

5000K

#### Distribution:

HB

#### Lifespan:

Features 3030 LED's with up to 100,000 running hours

#### Ratings & Certificates


UL Listed

# Litelume LED High Bay Linear All Purpose Adjustalume Series




## Dimension

Item	Height (H)	Width (W)	Length (L)
90W/130W/175W/210W SELECTABLE	1.75"	9.85"	23.62"
90W/130W	1.75"	9.84"	16.54"
175W/210W	1.75"	9.84"	23.62"
270W/300W	1.75"	9.84"	35.43"

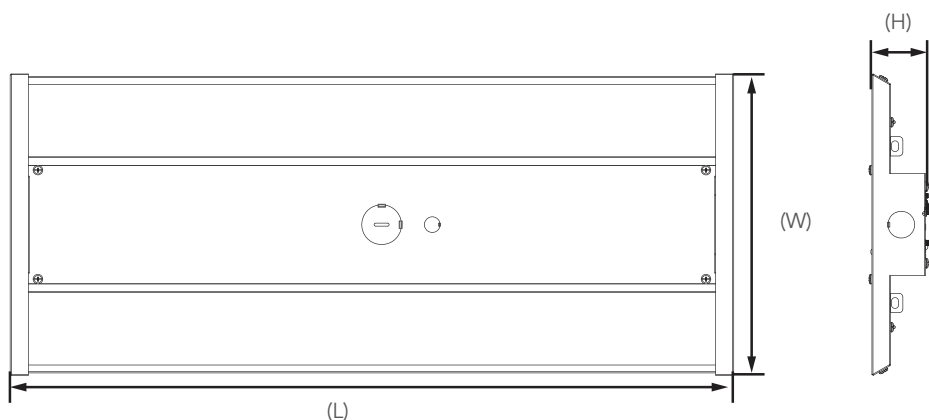


## Features\*

Selectable version shown below

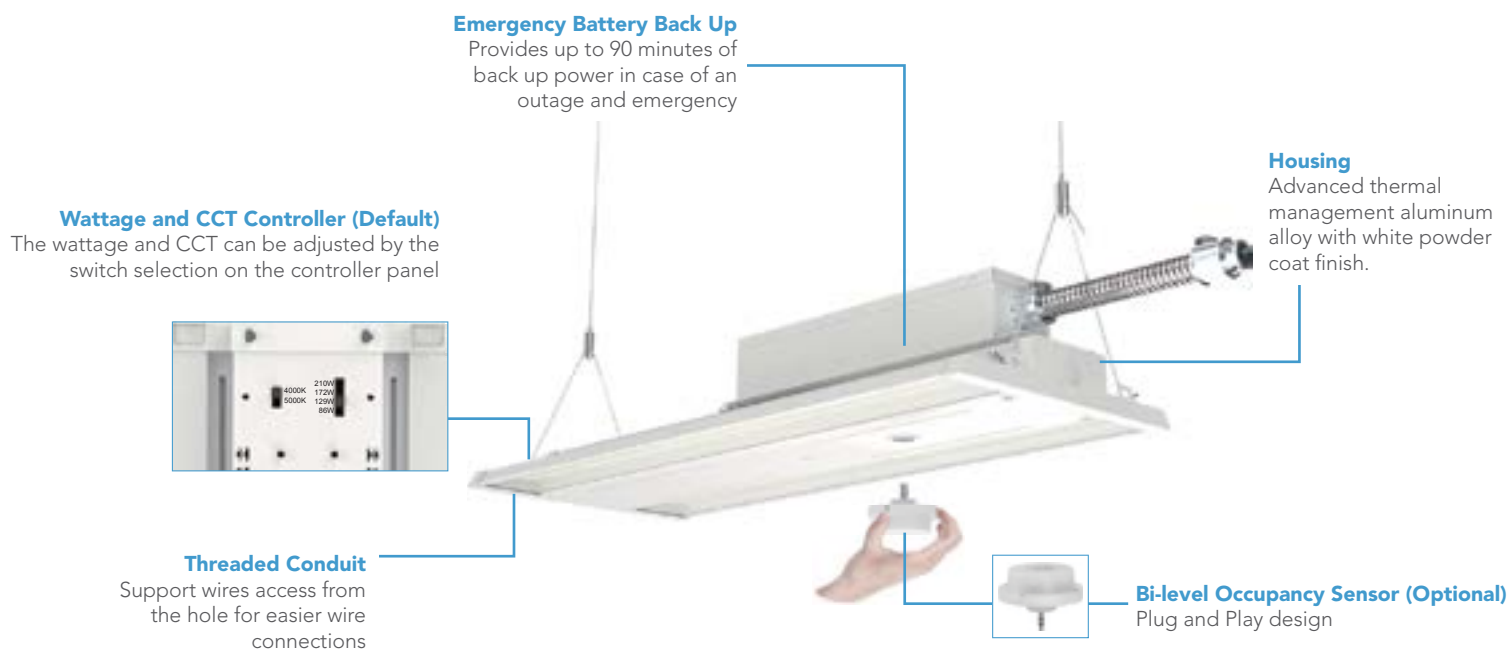

## Photometrics

# Litelume LED High Bay Linear All Purpose Adjustalume Series



## Accessories

Wire Guard	Emergency Battery
Motion Sensor	Center Mounting Box

# Litelume LED High Bay Linear All Purpose Adjustalume Series



<b>Project Name</b>	
<b>Catalog #</b>	
<b>Job Type</b>	
<b>Prepared By</b>	
<b>Notes</b>	

## Fixture Ordering Information

Part #	Wattage	Lumens	CCT	Voltage	Distribution
LL-HBLAP-90-50-UNV-WH	90	12700	5000	120-277	HB
LL-HBLAP-90-40-UNV-WH	90	12700	4000	120-277	HB
LL-HBLAP-130-50-UNV-WH	130	18600	5000	120-277	HB
LL-HBLAP-130-40-UNV-WH	130	18600	4000	120-277	HB
LL-HBLAP-175-50-UNV-WH	175	25300	5000	120-277	HB
LL-HBLAP-175-40-UNV-WH	175	25300	4000	120-277	HB
LL-HBLAP-210-50-UNV-WH	210	30600	5000	120-277	HB
LL-HBLAP-210-40-UNV-WH	210	30600	4000	120-277	HB
LL-HBLAP-270-50-UNV-WH	270	37000	5000	120-277	HB
LL-HBLAP-270-40-UNV-WH	270	37000	4000	120-277	HB
LL-HBLAP-300-50-UNV-WH	300	41500	5000	120-277	HB
LL-HBLAP-300-40-UNV-WH	300	41500	4000	120-277	HB
LL-HBLAP-[90][130][175][210]-2CCT-UNV-WH	90W/130W/175W/210W	12000/18000/24000/30000	4000K 5000K	120-277	HB

## Accessories Ordering Information

Part #	Description
MSP	Plug and play bi-level PIR motion sensor
LL-100	Remote Control 100
WG-HBLAP	Wire Guard
CMB-HBLAP	Center mounting box for HBLAP
SUB "UNV" WITH "480"	480 Volt
EM8	Emergency battery backup 8W
EM16	Emergency battery backup 16W

## Buy American Act Compliant Ordering Information

Part #	Description
BAA-HBLAP	Buy American Act Compliant For Highbay Linear All Purpose Series

\* Please contact LITELUME for all Custom Option Requests