



## Description

NEMA4X/NSF Exit Sign

## Illumination:

- Ultra bright, energy efficient, long life Red or Green LEDs.

## Electrical:

- Dual 120/277 voltage.
- Unique bi-color LED indicator light alerts occupant on battery condition (Green-normal, Red-check-battery).
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing.
- 4.8V long life, maintenance-free, rechargeable NiCd battery (EM models only).
- Internal solid-state transfer switch automatically connects the internal battery to LED board for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.

## Mounting:

- Universal knockout pattern on back provided with gasket for watertight seal for back mount.
- Polycarbonate mounting canopy included for top or end mount.

## Housing:

- Housing is reinforced polycarbonate construction in gray finish.
- Corrosion-resistant enclosure with one piece, highimpact resistant, UV stabilized polycarbonate lens and molded gasket with stainless steel screws.
- Knockout's provided for conduit feed applications.
- EZ snap-out Chevron directional indicators.

## Options:


- SDT: Self-diagnostic feature performs monthly, biannual, and annual tests to ensure reliable operation and meets electrical and life safety codes.
- 2C-120V/2C-277V: Voltage-specific dual circuit option on the AC-only unit enables it to be connected to two different supplies at the same time.
- TP: Tamper-proof hardware helps discourage unauthorized access to the unit.

## Warranty/Listing:

- Five year warranty on all electronics and housing. Battery prorated for five years.
- Meets UL924, NFPA101 Life Safety Code, NEC, OSHA, Local and State Codes
- IP66 rated for Ingress Protection.
- NEMA4X and NSF rated.
- Certified to CEC under Title 20 Regulations.
- UL certified for use in food service operations.
- UL Listed for damp locations (0°C – 50°C).



## Dimensions:

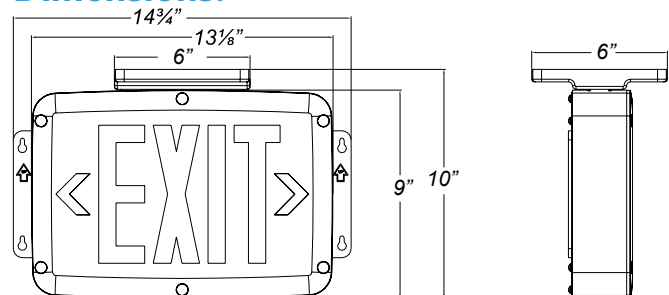



<b>Project Name</b>	
<b>Catalog #</b>	
<b>Job Type</b>	
<b>Prepared By</b>	
<b>Notes</b>	

### Fixture Ordering Information

Model	No. of Faces	Letter Color	Housing Color	Battery	Options					
LL-INDWLEZU	1 2	Single Face Double Face	R G	Red Green	W B	White Black	(blank) EM	AC-Only NiCd Battery	SDT 2C-120 2C-277 TP	Self-Diagnostics <sup>1</sup> Dual Circuit With 120V Input <sup>2</sup> Dual Circuit With 277V Input <sup>2</sup> Tamper-Proof

<sup>1</sup> Available only with EM units.

<sup>2</sup> Available only with AC units .