



Description

Low Level All Led Exit & Emergency Thermoplastic Combo

Illumination:

- Long lasting, efficient ultra bright white LED light strip.
- 3.1 watts (24 LEDs x 0.13 watts) per light strip.
- Patent-pending high performance, smooth, chrome plated, metalized reflector with acrylic UV stabilized lens for optimal light distribution.
- Long life ultra-bright, energy efficient Red or Green LED EXIT sign illumination

Electrical:

- Dual 120V/277 voltage,
- Unique bi-color LED indicator alerts occupant on battery condition (Green-normal, Red-check battery).
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing.
- 3.6V Long life, maintenance-free, rechargeable NiCd battery.
- Internal solid-state transfer switch automatically connects the internal battery to LED board and LED lamp heads for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.

Mounting:

- Universal knockout pattern on back plate for wall mount.

Housing:


- Patented specification-grade, low profile thin plastic design is ideal for low level applications.
- Injection-molded, engineering grade, 5VA flame retardant, high-impact resistant, thermoplastic in white or black finish.
- EZ snap-out Chevron directional indicators.

Warranty/Listing:

- Five year warranty on all electronics and housing. Battery prorated for five years.
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.
- UL Listed for damp locations (20°C – 40°C).
- Certified to CEC under Title 20 Regulations.



Dimensions:

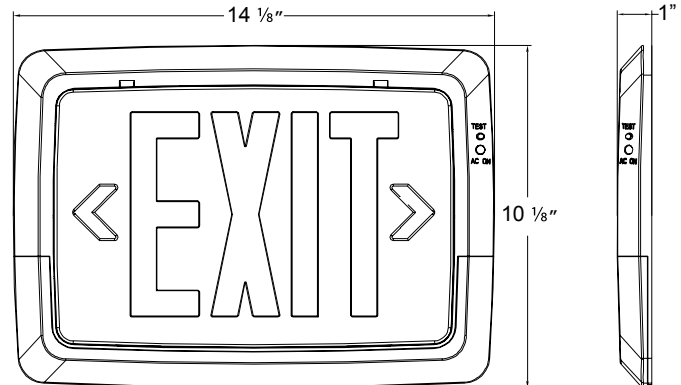



Project Name	
Catalog #	
Job Type	
Prepared By	
Notes	

Fixture Ordering Information

Model	No. of Faces		Letter Color		Housing Color	
			R	Red	W	White
LL-LCTXTEU	1	Single Face	G	Green	B	Black