



Linear Half Round Architectural Full-Perforated



Description

The LITELUME Linear Half Round Architectural Full-Perforated (LL-LHRA-FP) brings style and performance together with a direct/indirect light distribution to commercial and retail lighting interiors. Incorporating a dual perforated design that creates soft and diffused lighting ensuring maximum visual comfort and balance. It can be installed individually or in continuous rows.

An Excellent choice for grocery, library, hotels, offices, restaurants, retail and more.

Fixture Information

Size:	60W/80W/100W
Housing:	Aluminum
Finish:	5 stage bonding, high reflectance baked enamel finish
Color:	Standard: White, Black
Mounting:	Suspended Mount
Temperature:	-22° F to 104° F
Voltage:	Standard: 120-277V Custom Option: 347-480V
Dimming:	Standard: No Optional: 0-10v or Triac
Power Factor:	.95
CRI:	82
Warranty:	5-Year Limited Warranty

Performance Data

Lumen Output:

6,000 to 10,000 lm

Lumens Per Watt (typical):

100 lm/W

CCT:

3000K

3500K

4000K

5000K

Lifespan:

Up to 100,000 running hours

Ratings & Certificates


UL Listed






Dimension


Item	Height	Width	Length
40W/50W	2.75"	11"	49.25"

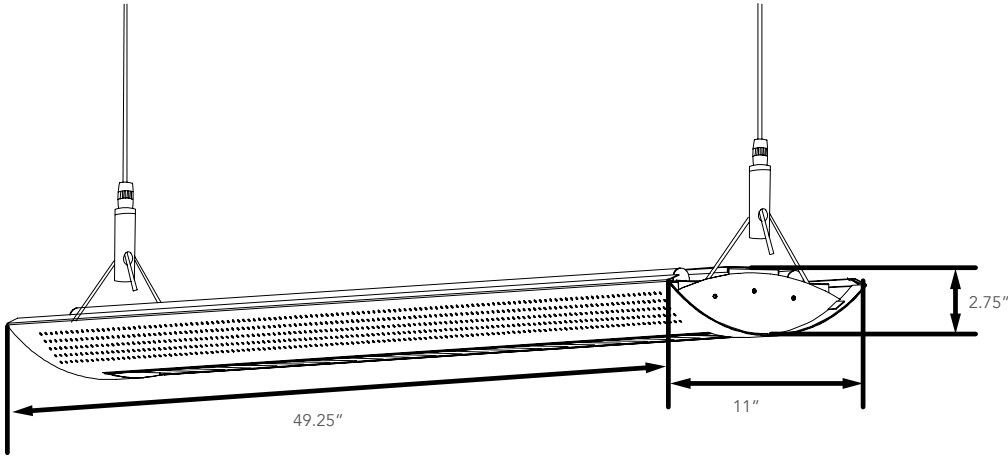


Installation Dimensions

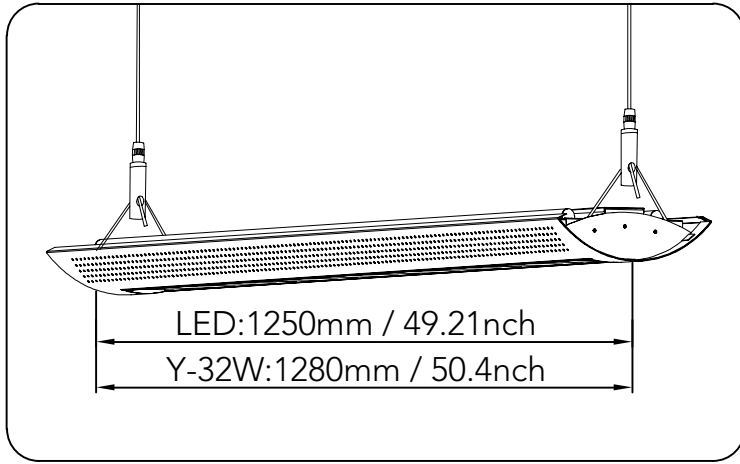

Product Profile

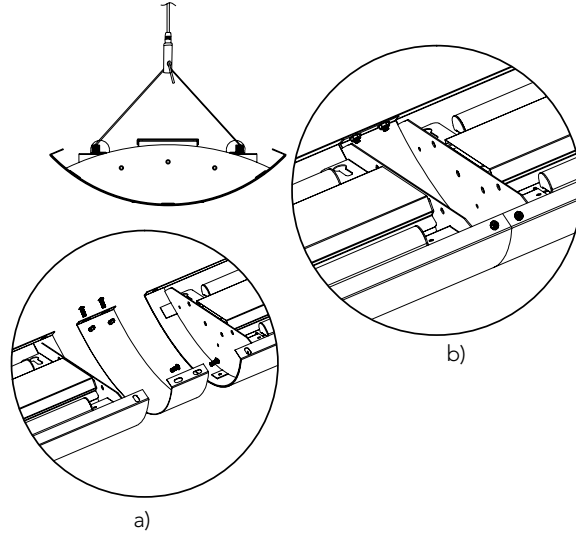

Suspended Mounting

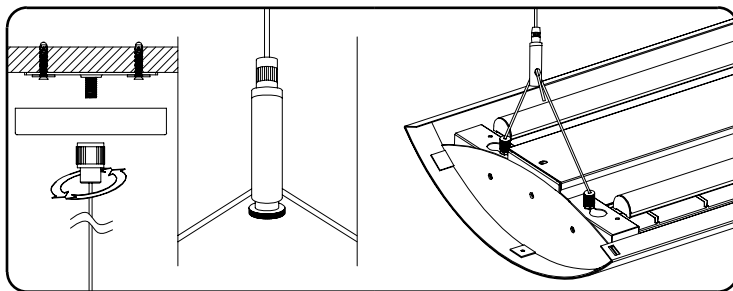

Suspended Mount Kit





Project Name	
Catalog #	
Job Type	
Prepared By	
Notes	

Fixture Ordering Information

Part #	Wattage	Lumens	Kelvin	Voltage
LL-LHRA-FP-60-50-UNV	60	6000	5000	120-277
LL-LHRA-FP-60-40-UNV	60	6000	4000	120-277
LL-LHRA-FP-60-35-UNV	60	6000	3500	120-277
LL-LHRA-FP-60-30-UNV	60	6000	3000	120-277
LL-LHRA-FP-80-50-UNV	80	8000	5000	120-277
LL-LHRA-FP-80-40-UNV	80	8000	4000	120-277
LL-LHRA-FP-80-35-UNV	80	8000	3500	120-277
LL-LHRA-FP-80-30-UNV	80	8000	3000	120-277
LL-LHRA-FP-100-50-UNV	100	10000	5000	120-277
LL-LHRA-FP-100-40-UNV	100	10000	4000	120-277
LL-LHRA-FP-100-35-UNV	100	10000	3500	120-277
LL-LHRA-FP-100-30-UNV	100	10000	3000	120-277

Accessories Ordering Information

Part #	Description
80/20	80% Up Light / 20% Down Light
60/40	60% Up Light / 40% Down Light
DIM	0-10V Dimming
DIMTRIAC	Triac Dimming
WH	White
BK	Black
CORD6WH183	6' So Cord, White, 300V, 18 Gauge, 3 Conductor
CORD6WH185	6' So Cord, White, 300V, 18 Gauge, 5 Conductor
CORD6BK183	6' So Cord, Black, 300V, 18 Gauge, 3 Conductor
CORD6BK185	6' So Cord, Black, 300V, 18 Gauge, 5 Conductor
AC6CK-WH	Air Craft Cable And Canopy Kit, White, 6'
AC6CK-BK	Air Craft Cable And Canopy Kit, Black, 6'
CONN	Connector Kits

* Please contact LITELUME for all Custom Option Requests