



## Description

New York City Compliant Die-Cast Aluminum Exit Sign

## Illumination:

- Ultra bright, energy efficient, long life Red LEDs.
- New York City compliant 8" EXIT letters.

## Electrical:

- Dual 120/277 voltage.
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing.
- 4.8V long life, maintenance-free, rechargeable NiCd battery (EM models only).
- Internal solid-state transfer switch automatically connects the internal battery to LED board for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.

## Mounting:

- Aluminum mounting canopy included for top or end mount.
- Universal knockout pattern on back plate for wall mount.

## Housing:

- Premium-grade, die-cast aluminum housing (also available in optional black or white powder-coated finishes).
- Field selectable knockout Chevron directional indicators.
- Unique design allows double face conversion in the field.
- Quick-snap face plate closure.

## Options:


- SDT: Self-diagnostic feature performs monthly, biannual, and annual tests to ensure reliable operation and meets electrical and life safety codes.
- 2C: Dual circuit option on the AC-only unit enables it to be connected to two different (one acting as a back-up to the other) supplies at the same time.
- TP: Tamper-proof hardware helps discourage unauthorized access to the unit.

## Warranty/Listing:

- Five year warranty on all electronics and housing. Battery prorated for five years.
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.
- UL Listed for damp locations (0°C – 50°C).
- Certified to CEC under Title 20 Regulations.



## Dimensions:

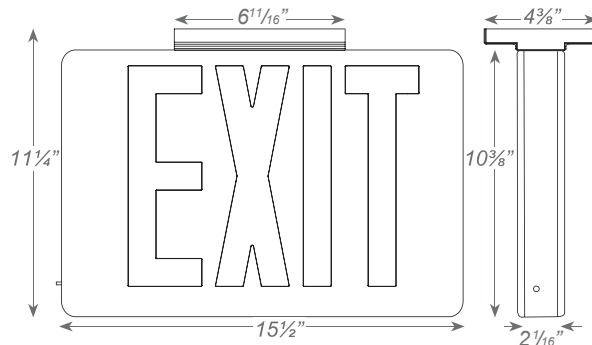



<b>Project Name</b>	
<b>Catalog #</b>	
<b>Job Type</b>	
<b>Prepared By</b>	
<b>Notes</b>	

### Fixture Ordering Information

Model	No. of Faces	Letter Color	Housing Color	Face Panel	Battery	Options
LL-NYKXTEU	1 2 3	Single Face Double Face Universal Single/ Double Face	R Red	W B A White Black Aluminum	W B A White Black Aluminum	(blank) EM AC-Only Battery Backup SDT 2C TP Self-Diagnostics <sup>1</sup> Dual Circuit Operation <sup>2</sup> Tamper-Proof

<sup>1</sup> Available only with EM units.

<sup>2</sup> Available only with AC units.