



# Post Top Area Light Large



## Description

The LITELUME™ Post Top Area Light large Luminaire (LL-PTALL) combines style with performance. Featuring a die-cast aluminum housing with outstanding corrosion protection, and secondary UV resistant polycarbonate optics. The PTALL provides an aesthetically pleasing addition to any walkway, park, downtown corridor or parking lot with its steady well-defined construction. The highly functioning optics provide maximum distribution to make the PTALL a premier choice for outdoor area lighting.

## Fixture Information

Size:	48W/100W/153W/204W/301W
Housing:	Die-cast aluminum housing
Finish:	Protective powdercoat
Color:	Standard: Bronze Custom Options: Black (BK), White (WH) and Gray (GY)
Mounting:	Tenon fits 2 3/8" standard OD
Power Factor:	>.95
CRI:	80
Driver:	Meanwell HLG
Lens:	Polycarbonate
Surge Protector:	Standard: 4kVA Optional: 10kVA, 20kVA
Voltage:	Standard: 120-277V Custom Option: 347-480V
Sensor:	Standard: No sensor
Warranty:	5-Year Limited Warranty

## Performance Data

### Lumen Output:

5579 to 37170 lm

### Lumens Per Watt (typical):

116.22 - 128.50 lm/W

### CCT:

3000K  
4000K  
5000K

### Distribution:

Type V

### Lifespan:

Features Philips Lumileds with up to 100,000 running hours.

## Ratings & Certificates

ETL Listed for Wet Location




Intertek




### Dimensions

Item	Width	Length	Height
Post Top Area Light Large	21.97"	15.76"	21.97"

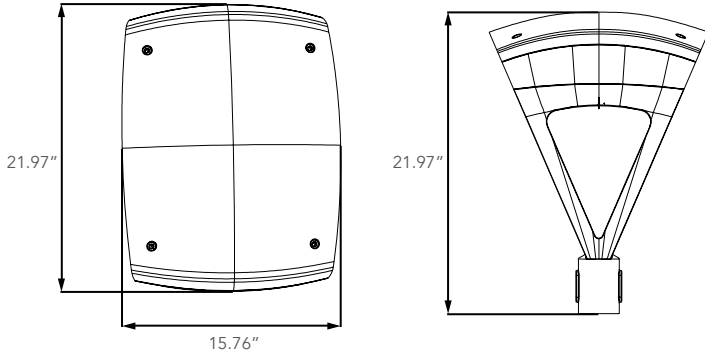


### Photometric Data


51W

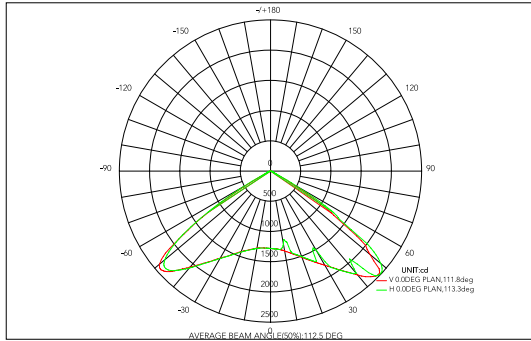


107W

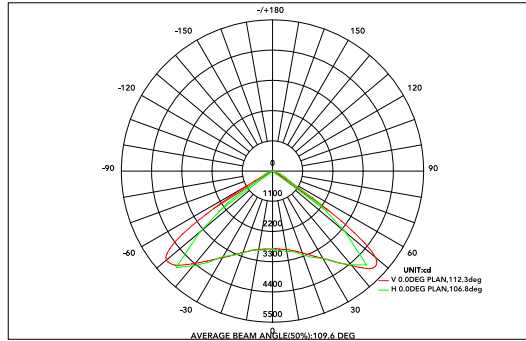


147W

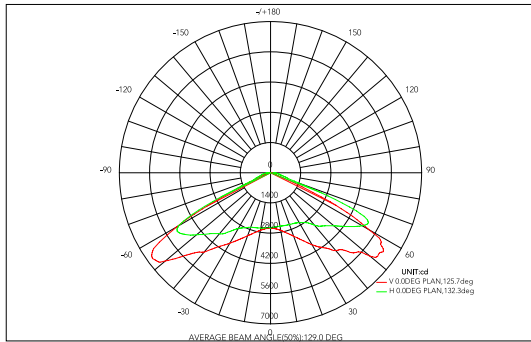

206W

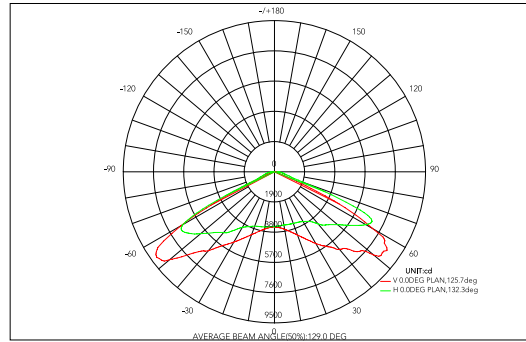

301W

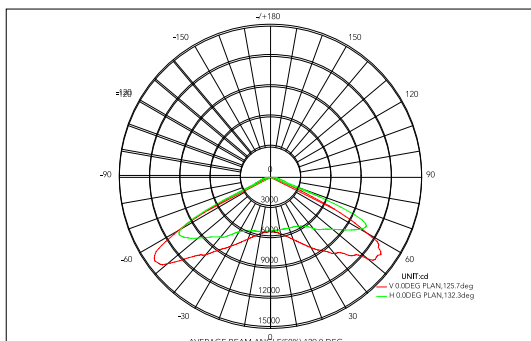



<b>Project Name</b>	
<b>Catalog #</b>	
<b>Job Type</b>	
<b>Prepared By</b>	
<b>Notes</b>	

## Fixture Ordering Information

Part #	Wattage	Lumens	Kelvin	Voltage	Type Distribution	Custom Option Available*
LL-PTALL-45-50-UNV-T5-BZ	48	5810	5000	120-277	T5	Yes
LL-PTALL-45-40-UNV-T5-BZ	48	5693	4000	120-277	T5	Yes
LL-PTALL-45-30-UNV-T5-BZ	48	5579	3000	120-277	T5	Yes
LL-PTALL-95-50-UNV-T5-BZ	100	12850	5000	120-277	T5	Yes
LL-PTALL-95-40-UNV-T5-BZ	100	12593	4000	120-277	T5	Yes
LL-PTALL-95-30-UNV-T5-BZ	100	12341	3000	120-277	T5	Yes
LL-PTALL-145-50-UNV-T5-BZ	153	19433	5000	120-277	T5	Yes
LL-PTALL-145-40-UNV-T5-BZ	153	19044	4000	120-277	T5	Yes
LL-PTALL-145-30-UNV-T5-BZ	153	18663	3000	120-277	T5	Yes
LL-PTALL-195-50-UNV-T5-BZ	204	25860	5000	120-277	T5	Yes
LL-PTALL-195-40-UNV-T5-BZ	204	25342	4000	120-277	T5	Yes
LL-PTALL-195-30-UNV-T5-BZ	204	24835	3000	120-277	T5	Yes
LL-PTALL-295-50-UNV-T5-BZ	301	37170	5000	120-277	T5	Yes
LL-PTALL-295-40-UNV-T5-BZ	301	36426	4000	120-277	T5	Yes
LL-PTALL-295-30-UNV-T5-BZ	301	35698	3000	120-277	T5	Yes

\* Please contact LITELUME for all Custom Option Requests

## Accessories Ordering Information

Part #	Wattage
TLPC	Twist Lock Photocell and Receptacle 120-277V
TLPC480	Twist Lock Photocell and Receptacle 480V
ECM20ZB	EU Controls Zigbee Lighting And Photo Control
SP10	10kVA Surge Protector
SP20	20kVA Surge Protector
R3	Twist Lock Receptacle 3 Pin
R7	Twist Lock Receptacle 7 Pin
SUB "UNV" WITH "480"	480 VOLT

\* Please contact LITELUME for all Custom Option Requests

## Buy American Act Compliant Ordering Information

Part #	Description
BAA-PTALL	Buy American Act Compliant for Post Top Area Light Large

\* Please contact LITELUME for all Custom Option Requests