



# Post Top Round Premium



## Description

The Post Top Round Premium (LL-PTRP) combines style and performance with its seamless appearance. Featuring a die-cast aluminum housing with outstanding corrosion protection. Round and smooth in design with soft light. Suitable for mounting heights of 8-25' makes this an excellent choice for pathway, walkway, municipality and general lighting applications.

## Fixture Information

Size:	53W/82W/136W
Housing:	Die-cast aluminum body
Lens:	Precision injection-molded, UV polycarbonate Optics Lens
Finish:	UV Stabilized Powder coated finish
Color:	Standard: Bronze Custom options available
Mounting:	Tenon fits 2 3/8" standard OD
Starting Temp:	-40°C
CRI:	70+
THD:	<20%
Power Factor:	.90
Voltage:	Standard: 120-277V Optional 347-480V
Warranty:	5 Year Warranty

## Performance Data

### Lumen Output:

6890 to 17680 lm

### Lumens Per Watt (typical):

130 lm/W

### CCT:

3000K  
4000K  
5000K

### Distribution:

Type V

## Ratings & Certificates


UL & cUL Listed





## Dimensions

Item	Height 1	Height 2	Width 1	Width 2
LL-PTPR	22.3"	4.52"	17.3"	4.52"

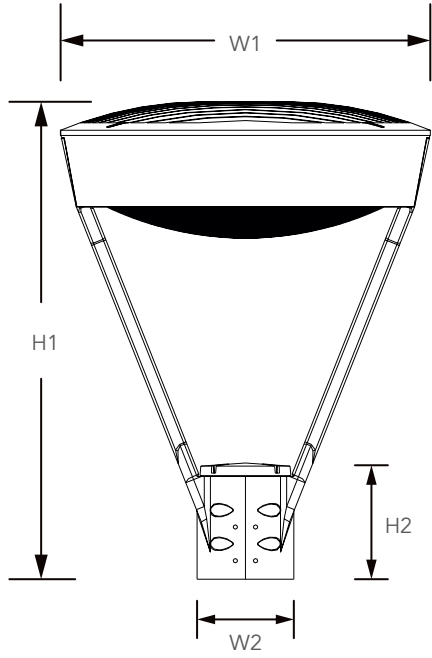

## Additional Image





<b>Project Name</b>	
<b>Catalog #</b>	
<b>Job Type</b>	
<b>Prepared By</b>	
<b>Notes</b>	

## Fixture Ordering Information

Part #	Wattage	Lumens	Kelvin	Voltage	Distribution
LL-PTRP-53-50-UNV-T5-BZ	53	6890	5000	120-277	T5
LL-PTRP-53-40-UNV-T5-BZ	53	6890	4000	120-277	T5
LL-PTRP-53-30-UNV-T5-BZ	53	6890	3000	120-277	T5
LL-PTRP-82-50-UNV-T5-BZ	82	10660	5000	120-277	T5
LL-PTRP-82-40-UNV-T5-BZ	82	10660	4000	120-277	T5
LL-PTRP-82-30-UNV-T5-BZ	82	10660	3000	120-277	T5
LL-PTRP-136-50-UNV-T5-BZ	136	17680	5000	120-277	T5
LL-PTRP-136-40-UNV-T5-BZ	136	17680	4000	120-277	T5
LL-PTRP-136-30-UNV-T5-BZ	136	17680	3000	120-277	T5

## Accessories Ordering Information

Part #	Description
SUB "UNV" WITH "480"	480 Volt
TLPC	Twist Lock Photocell & Receptacle 120-277V
TLPC480	Twist Lock Photocell & Receptacle 480V
SPUNV	Surge Protection 120-277V
SP480	Surge Protection 480V
OS	Occupancy Sensor