



8' LED Strip Retrofit Kit



Description

The Litelume 8' LED Strip Retrofit Kit (LL-SRK-8) is designed to transform existing fluorescent strips into high performance LED luminaires. Delivering general ambient lighting in a variety of indoor settings, including schools, offices, hospitals and stores. This high-efficacy luminaire provides long-life and uniform illumination, as well as standard 0-10vdc dimming capability.

Fixture Information

| | |
|------------------------|-------------------------|
| Size: | 46W |
| Housing: | Steel |
| Color: | Standard: White |
| Lens: | Acrylic |
| Dimming: | Standard 0-10v |
| Operating Temperature: | -20°C to 50°C |
| Power Factor: | .95 |
| CRI: | 80 |
| Voltage: | Standard: 120-277V |
| Sensor: | Standard: No sensor |
| Warranty: | 5-Year Limited Warranty |

Performance Data

Lumen Output:

5,842 to 6,026 lm

Lumens Per Watt (typical):

127 to 131 lm/W

CCT:

3500K
4000K
5000K

Lifespan:

122,000 hours @ 70% (L70)

Ratings & Certificates


cULus Listed for Damp Locations
Flicker-free per IEEE1789-2015 (low risk of adverse effects of flicker at 100% light output level).
Complies with FCC Part 15, Class A.
Complies with IEEE C.62.41-1991, input transient surge protection (2.5kV).
Complies with RoHS (Restriction on Hazardous Substances) requirements.





Dimension

| Item | Height | Width | Length | Weight |
|------|--------|-------|--------|---------|
| 46W | 2.00" | 5.00" | 48.00" | 8.4 lbs |

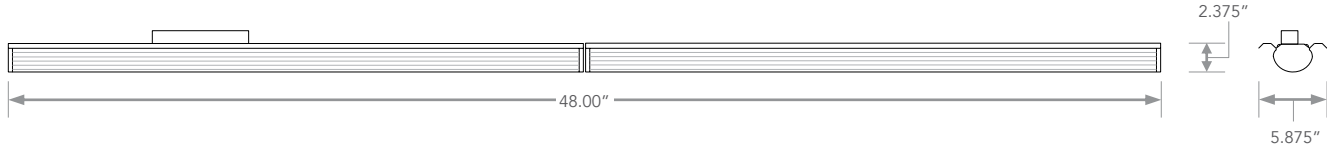



| | |
|---------------------|--|
| Project Name | |
| Catalog # | |
| Job Type | |
| Prepared By | |
| Notes | |

Fixture Ordering Information

| Part # | Wattage | Lumens | Kelvin | Voltage | Color |
|--------------------|----------------|---------------|---------------|----------------|--------------|
| LL-SRK-8-46-35-UNV | 46 | 5843 | 3500 | 120-277V | White |
| LL-SRK-8-46-40-UNV | 46 | 5980 | 4000 | 120-277V | White |
| LL-SRK-8-46-50-UNV | 46 | 6026 | 5000 | 120-277V | White |