



# Sconce Super Low



## Description

The LITELUME™ Sconce Super Low (LL-SSL) luminaire incorporates a super low profile fresh design. Features a die-formed cold rolled steel housing in brushed aluminum or optional oil rubbed bronze with a high transmission acrylic lens for even distribution. Offering a standard model in MCT ( multiple color temperature 3000k/35000k/4000k ), high power factor and low THD.

Applications: commercial, residential, hospitality and entertainment.

## Fixture Information

Size:	18W
Housing:	Die-formed cold rolled steel
Finish:	Protective powder coat
Color:	Standard:Brushed (BA) Optional: Oil Rubbed Bronze (ORB)
Mounting:	Standard: Wall Mount
Lens:	High Transmission Acrylic
CRI:	80
Power Factor:	.90
Voltage:	Standard: 120-277V
Warranty:	10-Year Limited Warranty

## Performance Data

### Lumen Output:

1100 lm

### Lumens Per Watt (typical):

61lm/W

### CCT:

MCT 3000K/3500K/4000K SELECTABLE

## Ratings & Certificates


ETL/cETL Listed  
Damp Location Listed  
ADA Compliant





## Dimension

Item	Width	Depth	Height
18W	5.1"	2.2"	12.8"

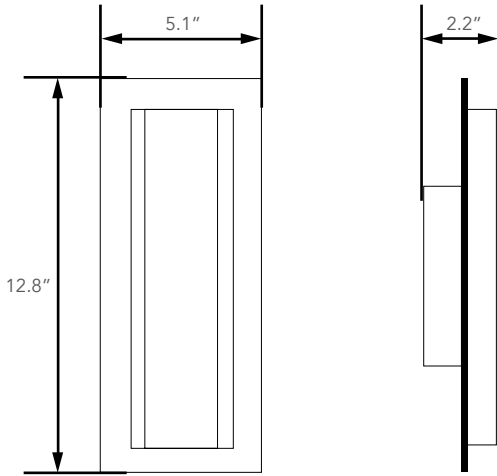



<b>Project Name</b>	
<b>Catalog #</b>	
<b>Job Type</b>	
<b>Prepared By</b>	
<b>Notes</b>	

### Fixture Ordering Information

<b>Part #</b>	<b>Wattage</b>	<b>Lumens</b>	<b>Kelvin</b>	<b>Voltage</b>	<b>Color</b>
LL-SSL-18-MCT-UNV-BA	15	1100	3000/3500/4000	120-277	Brushed Aluminum
LL-SSL-18-MCT-UNV-ORB	15	1100	3000/3500/4000	120-277	Oil Rubbed Bronze

\* Please contact LITELUME for all Custom Option Requests