



## Description

Steel Exit Sign

## Illumination:

- Ultra bright, energy efficient, long life Red or Green LEDs.

## Electrical:

- Dual 120/277 voltage.
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing.
- 4.8V long life, maintenance-free, rechargeable NiCd battery (EM models only).
- Internal solid-state transfer switch automatically connects the internal battery to LED board for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.

## Mounting:

- Mounting canopy included for top or end mount.
- Universal knockout pattern on back plate for wall mount.

## Housing:

- Durable, powder-coated 20-gauge steel construction in black or white finish.
- Unique design allows double face conversion in the field.
- Field removable steel knockout Chevron directional indicators.

## Options:


- SDT: Self-diagnostic feature performs monthly, biannual, and annual tests to ensure reliable operation and meets electrical and life safety codes.

## Warranty/Listing:

- Five year warranty on all electronics and housing. Battery prorated for five years.
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.
- UL Listed for damp locations (0°C – 50°C).
- Certified to CEC under Title 20 Regulations.



## Dimensions:

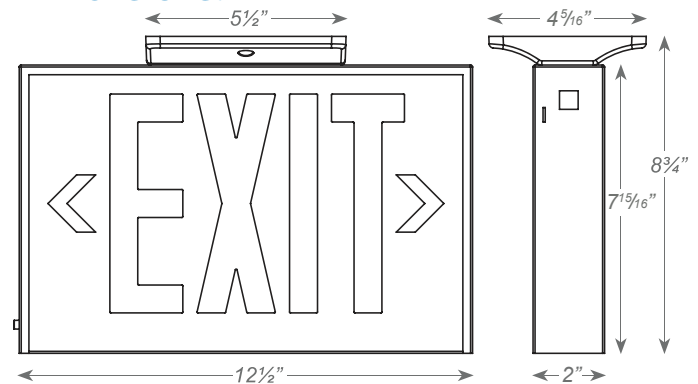



<b>Project Name</b>	
<b>Catalog #</b>	
<b>Job Type</b>	
<b>Prepared By</b>	
<b>Notes</b>	

### Fixture Ordering Information

Model	No. of Faces		Letter Color		Housing Color		Battery		Options	
LL-SXTEU	2	Universal Single/ Double Face	R G	Red Green	W B	White Black	(blank) EM	AC-Only Battery Backup	SDT	Self-Diagnostics <sup>1</sup>

<sup>1</sup> Available only with EM units.