




Troffer Retrofit Strip

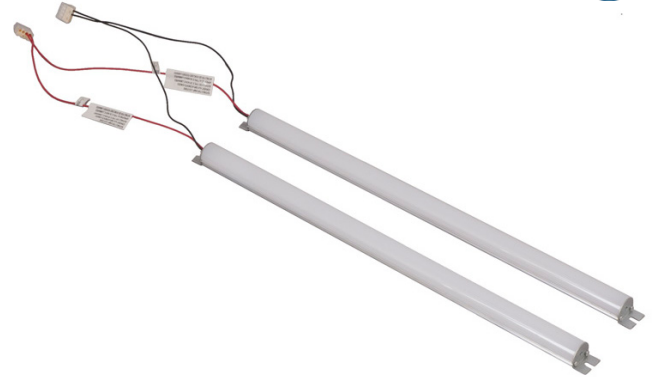

Description

The Litelume Troffer Retrofit Strip (LL-TRS) is designed to transform existing fluorescent troffers or enclosures into high performance LED luminaires. Delivering general ambient lighting in a variety of indoor settings, including schools, offices, hospitals and stores. This high efficacy kit provides long-life and uniform illumination, as well as standard 0-10v DC dimming capability.

Fixture Information

Size:	20W/30W/45W/60W/90W
Housing:	Aluminum Extrusion Housing with Easy Mounting Bracket. Magnet Construction Makes Easy Pre-alignment on Installation
Finish:	Protective powdercoat
Color:	Standard: White
Lens:	High Transmission Acrylic Creates Excellent Light Distribution and Uniformity
Dimming:	Standard 0-10V
Operating Temperature:	-20°C to 50°C
Power Factor:	.95
CRI:	80
Voltage:	Standard: 120-277V
Warranty:	5-Year Limited Warranty

Performance Data

Lumen Output:

2,600 to 7,800 lm

Lumens Per Watt (typical):

130 lm/W

CCT:

4000K

Lifespan:

100,000 Hours

Ratings & Certificates

ETL listed





Project Name	
Catalog #	
Job Type	
Prepared By	
Notes	

Dimension

Item	Width	Length	Height
2x2	1"	20.7"	0.8"
2x4	1"	44.2"	0.8"

Fixture Ordering Information

Part #	Wattage	Lumens	Kelvin	Voltage
LL-TRS-22-2L-20-40-D	20W	2600	4000K	120-277
LL-TRS-22-3L-30-40-D	30W	3900	4000K	120-277
LL-TRS-24-2L-30-40-D	30W	3900	4000K	120-277
LL-TRS-24-3L-45-40-D	45W	5850	4000K	120-277
LL-TRS-24-4L-60-40-D	60W	7800	4000K	120-277
LL-TRS-44-6L-90-40-D	90W	11700	4000K	120-277