



Vaportite Standard Series



Description

The Litelume LED Vaportite Standard Series (LL-VT2, LL-VT4, and LL-VT8) is a suspended or surface mounted vapor proof luminaire designed for retrofit or new construction. Our Injection molded one piece body features a chemical resistant finish for rigidity, durability and prolonged life in rough environments. Weatherability IP66 rated housing. Tool Less removable gear tray for quick and easy access to electrical components. Stainless steel latches fastened to housing to safely secure the lens to housing. Designed to achieve maximum performance and improved lighting.

Applications include parking garage, stairwell lighting, commercial and industrial with applicable building and safety codes.

Fixture Information

Size:	20W/40W/60W/80W/120W
Housing:	Polycarbonate
Lens:	PMMA Impact resistant acrylic
Colors:	Standard: Grey
Mountings:	Standard: Surface Mount, Suspended Mount
Accessories:	Emergency Back-up Battery
Sensor:	Standard: No sensor Optional: Integrated Microwave Motion sensor
Dimming:	0-10V
Operating Temperature:	-40° F to 131° F
Power Factor:	.95
CRI:	83
Voltage:	Standard: 120-277V Optional: 480v
Warranty:	5-Year Limited Warranty

Performance Data

Lumen Output:

2,100 to 15,600 lm

Lumens Per Watt (typical):

105 to 130 lm/W

CCT:

4000K
5000K

Lifespan:

up to 100,000 hrs

Ratings & Certificates



ETL Listed for Wet Locations
IP66 rated





Dimension

Item	Height	Length	Width
20W	24.33"	3.07"	4.56"
40W/60W	47.83"	3.07"	4.56"
80W/120W	101.18"	3.07"	4.56"

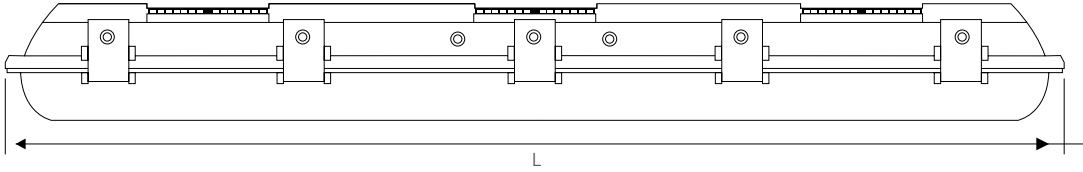



Project Name	
Catalog #	
Job Type	
Prepared By	
Notes	

Fixture Ordering Information

Part #	Wattage	Lumens	Kelvin	Voltage
LL-VT2-20-50-UNV-WH	20	2205	5000	120-277
LL-VT2-20-40-UNV-WH	20	2100	4000	120-277
LL-VT4-40-50-UNV-WH	40	5200	5000	120-277
LL-VT4-40-40-UNV-WH	40	4940	4000	120-277
LL-VT4-60-50-UNV-WH	60	7800	5000	120-277
LL-VT4-60-40-UNV-WH	60	7410	4000	120-277
LL-VT8-80-50-UNV-WH	80	8400	5000	120-277
LL-VT8-80-40-UNV-WH	80	7980	4000	120-277
LL-VT8-120-50-UNV-WH	120	15600	5000	120-277
LL-VT8-120-40-UNV-WH	120	14820	4000	120-277

Accessories Ordering Information

Part #	Description
MMS	Microwave Motion Sensor
DH	Daylight Harvesting **MUST ORDER WITH MMS**
EM700	Emergency Battery Back Up, 700 lm, 90 Minutes **4' AND 8' ONLY**
EM1400	Emergency Battery Back Up, 1400 lm, 90 Minutes **8' ONLY**

* Please contact LITELUME for all Custom Option Requests