



# Wrap Linear Channel



## Description

The LITELUME Wrap Linear Channel Series (LL-WLC) features a 3" wide design with a PMMA lens and Steel Housing. Luminaire includes round plate to cover the ceiling-mounted junction box. Easy installation in new construction or retrofit applications. An excellent choice for grocery, retail, warehouse, shop, storage, utility, coves, and any general lighting.

## Fixture Information

Size:	35W
Housing:	Steel
Finish:	Protective Powder Coat
Color:	White
Mounting:	Standard: Surface Mount
Lens:	PMMA
Temperature:	5° F to 122° F
Power Factor:	.90
CRI:	80
Voltage:	Standard: 120-277V
Warranty:	5-Year Limited Warranty

## Performance Data

### Lumen Output:

4,034 to 4,203 lm

### Lumens Per Watt (typical):

116 to 120 lm/W

### CCT:

3000K  
4000K  
5000K

### Lifespan:

Up to 147,000 hrs

## Ratings & Certificates

cULus listed for damp locations in ambient temperatures from -15°C to 50°C (5°F to 122°F).

Complies with FCC Part 15, class B.


Complies with IEC61000-4-5, input transient protection (1.0kV).






### Dimension

Item	Depth	Height	Length	Weight
35W	3.0"	3.7"	47.6"	3.7 lbs

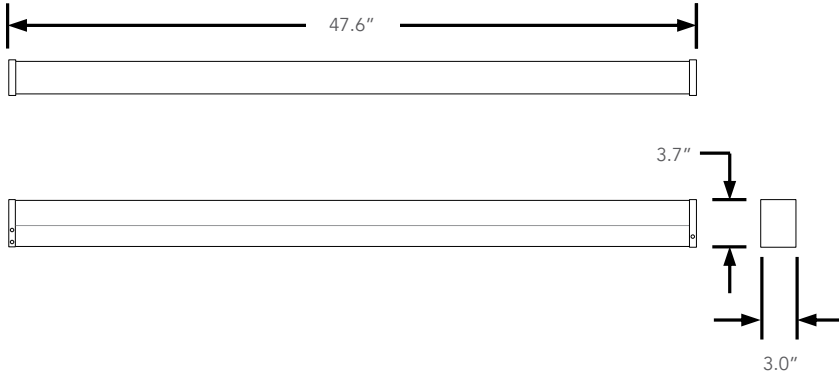

### Photometric Data

LL-WLC-4-35-50-UNV-WH

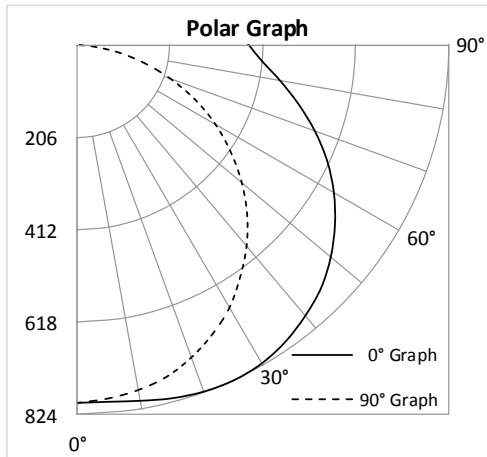



<b>Project Name</b>	
<b>Catalog #</b>	
<b>Job Type</b>	
<b>Prepared By</b>	
<b>Notes</b>	

### Fixture Ordering Information

<b>Part #</b>	<b>Wattage</b>	<b>Lumens</b>	<b>Kelvin</b>	<b>Voltage</b>	<b>Color</b>
LL-WLC-4-35-50-UNV-WH	35	4034	3000	120-277	White
LL-WLC-4-35-40-UNV-WH	35	4119	4000	120-277	White
LL-WLC-4-35-30-UNV-WH	35	4203	5000	120-277	White