



# Wallpack Large Full Cutoff



\*Not all product variations listed on this page are DLC qualified. Visit [www.designlights.org/search](http://www.designlights.org/search) to confirm qualification



## Description

The LITELUME™ Wallpack Large – Full Cutoff (LL-WPLFC) is a Dark Sky compliant LED fixture with a durable polycarbonate optical lens.

Applications: Entryways, Pathway, Perimeter and Security lighting.

## Fixture Information

Size:	85W/125W
Housing:	Die-cast Aluminum Housing
Finish:	Protective powdercoat
Color:	Standard: Bronze Custom Options: Black (BK) White (WH) Grey (GY)
Mounting:	Standard: Wall Mount
Lens:	Polycarbonate
Surge Protector:	Optional: 10 kVA
Voltage:	Standard: 120-277V Custom: 347-480V
Power Factor:	.90
CRI:	80
Operating Temperature:	-40°F to 104°F
Sensor:	Standard: No sensor Custom: Button Photocell (120-277V)
Warranty:	10-Year Limited Warranty

## QuickShip Ordering Information

Part #
LL-WPLFC-85-50-UNV-BZ
LL-WPLFC-125-50-UNV-BZ

## Performance Data

### Lumen Output:

11,834 to 17,800 lms

### Lumens Per Watt (typical):

139-142 lm/W

### CCT:

4000K  
5000K

### Distribution:

Type III

### Lifespan:

Features Philip Lumileds with up to 100,000 running hours

## Ratings & Certificates

UL Listed For Wet Location  
Dark Sky Compliant  
DLC Qualified\*



## Wattage Replacement


Existing Watts	Litelume Watts
250-400W	85W
400-575W	125W




### Dimension

Item	Width	Length	Height	Weight
Wallpack Large Full Cutoff	9.75"	18.10"	9.75"	15.50 lb
Wallpack Large Full Cutoff w/Sensor	9.75"	18.10"	10.50"	15.50 lb

#### Without Sensor

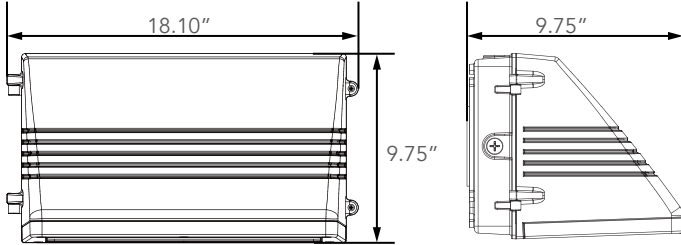


#### With Sensor

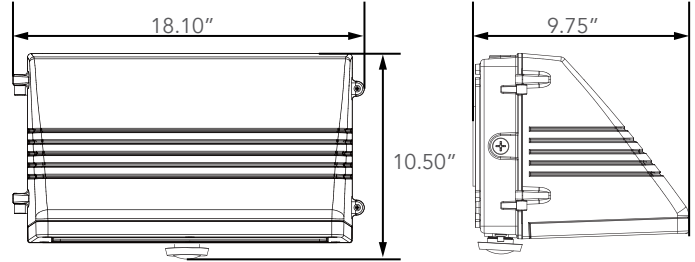

### Photometrics

#### Luminous Intensity Distribution Curve

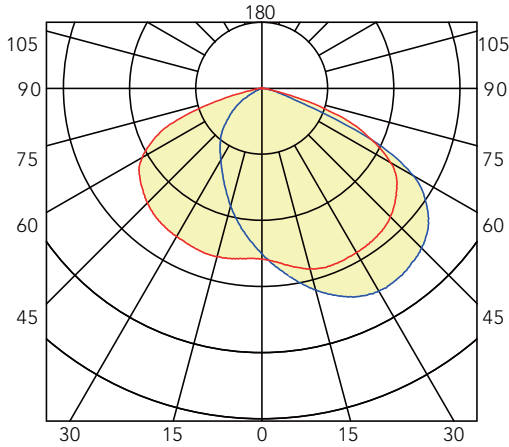

Average Diffuse Angle(50%): 109.7°



<b>Project Name</b>	
<b>Catalog #</b>	
<b>Job Type</b>	
<b>Prepared By</b>	
<b>Notes</b>	

## Fixture Ordering Information

Part #	Wattage	Lumens	Kelvin	Voltage	DLC Listed*
LL-WPLFC-85-50-UNV-BZ	85	12200	5000	120-277	Yes
LL-WPLFC-85-40-UNV-BZ	85	11834	4000	120-277	Yes
LL-WPLFC-125-50-UNV-BZ	125	17800	5000	120-277	No
LL-WPLFC-125-40-UNV-BZ	125	17266	4000	120-277	No

\*Not all product variations listed on this page are DLC qualified. Visit [www.designlights.org/search](http://www.designlights.org/search) to confirm qualification

## QuickShip Ordering Information

Part #
LL-WPLFC-85-50-UNV-BZ
LL-WPLFC-125-50-UNV-BZ

## Accessories Ordering Information

Part #	Wattage
PC	Button Photocell, 120-277V
MS20	Bi-Level PIR Motion Sensor 20
LL-100	Remote Control 100
L3	L3 Low Bay Coverage Lens
L4	L4 High Bay Coverage Lens
MSFSP211	Wattstopper Fsp-211 Bi-Level Pir Motion Sensor
FSPL2	Lens Module For Fsp-211 48' Diameter From 8' Mounting Height
FSPL3	Lens Module For Fsp-211 40' Diameter From 20' Mounting Height
FSPL7	Lens Module For Fsp-211 100' Diameter From 40' Mounting Height
FSIR100	Wattstopper Fsir-100 Wireless Configuration Tool for Fsp-211
SUB "UNV" WITH "480"	480 Volt
EM8	Emergency Battery Back Up 8W

\* Please contact LITELUME for all Custom Option Requests

## Buy American Act Compliant Ordering Information

Part #	Description
BAA-WPLFC	Buy American Act Compliant for Wallpack Large Full Cutoff

\* Please contact LITELUME for all Custom Option Requests