



# Wallpack Medium Full Cutoff



## Description

The LITELUME™ Wallpack Medium (LL-WPMFC) is a mid-sized, full cutoff LED fixture featuring die-cast aluminum housing and a superior dual coat finish.

Applications: Entryways, Tunnels, and Walkways.

## Fixture Information

Size:	28W/42W
Housing:	Die-cast Aluminum Housing
Finish:	Protective powdercoat
Color:	Standard: Bronze Custom Options: Black (BK) White (WH) Grey (GY)
Mounting:	Standard: Wall Mount
Lens:	Polycarbonate
Surge Protector:	Optional: 10 kVA
Voltage:	Standard: 120-277V
Power Factor:	.90
CRI:	80
Operating Temperature:	-40°F to 104°F
Sensor:	Standard: No sensor Custom: Button Photocell (120-277V)
Warranty:	10-Year Limited Warranty

## Performance Data

### Lumen Output:

3,420 to 5,038 lm

### Lumens Per Watt (typical):

112-121 lm/W

### CCT:

3000K  
4000K  
5000K

### Distribution:

Type III

### Lifespan:

Features Philip Lumileds with up to 100,000 running hours

## Ratings & Certificates

UL Listed For Wet Location  
Dark Sky Conformance\*\*



\*\*Litelume Wallpack Medium Full Cutoff perform to IDA's fully shielding requirement, emitting no light above 90 degrees when using pole mount accessory. Fixture must be ordered in 3000k to qualify for IDA Dark Sky Compliance

## QuickShip Ordering Information

Part #
LL-WPMFC-28-50-UNV-BZ
LL-WPMFC-42-50-UNV-BZ

## Wattage Replacement


Existing Watts	Litelume Watts
70-150W	28W
150-250W	42W




### Dimension

Item	Width	Length	Height	Weight
Wallpack Medium Full Cutoff	8.78"	14.21"	9.25"	15.50 lb
Wallpack Medium Full Cutoff w/Sensor	8.78"	14.21"	10.00"	15.50 lb

#### Without Sensor

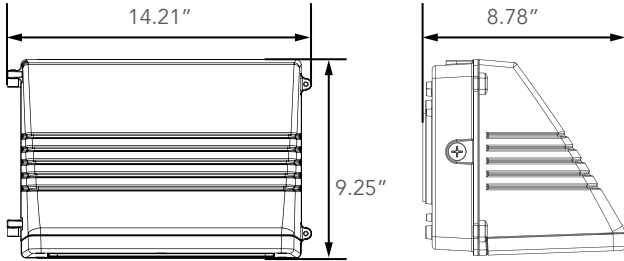


#### With Sensor

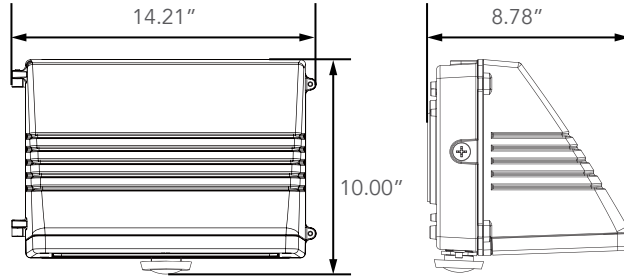

### Photometrics

#### Luminous Intensity Distribution Curve

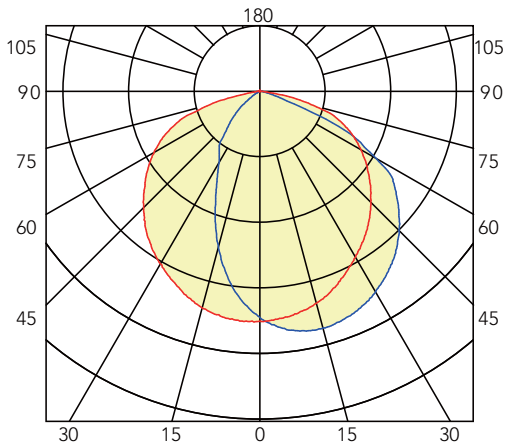

Average Diffuse Angle(50%): 102.7°



<b>Project Name</b>	
<b>Catalog #</b>	
<b>Job Type</b>	
<b>Prepared By</b>	
<b>Notes</b>	

## Fixture Ordering Information

Part #	Wattage	Lumens	Kelvin	Voltage	DLC Listed*
LL-WPMFC-28-50-UNV-BZ	28	3670	5000	120-277	Yes
LL-WPMFC-28-40-UNV-BZ	28	3601	4000	120-277	Yes
LL-WPMFC-28-30-UNV-BZ	28	3420	3000	120-277	No
LL-WPMFC-42-50-UNV-BZ	42	5038	5000	120-277	No
LL-WPMFC-42-40-UNV-BZ	42	4992	4000	120-277	No
LL-WPMFC-42-30-UNV-BZ	42	4742	3000	120-277	No

\*Not all product variations listed on this page are DLC qualified. Visit [www.designlights.org/search](http://www.designlights.org/search) to confirm qualification

## QuickShip Ordering Information

<b>Part #</b>
LL-WPMFC-28-50-UNV-BZ
LL-WPMFC-42-50-UNV-BZ

## Accessories Ordering Information

Part #	Wattage
PC	Button Photocell, 120-277V
MS20	Bi-Level PIR Motion Sensor 20
LL-100	Remote Control 100
L3	L3 Low Bay Coverage Lens
L4	L4 High Bay Coverage Lens
MSFSP211	Wattstopper Fsp-211 Bi-Level Pir Motion Sensor
FSPL2	Lens Module For Fsp-211 48' Diameter From 8' Mounting Height
FSPL3	Lens Module For Fsp-211 40' Diameter From 20' Mounting Height
FSPL7	Lens Module For Fsp-211 100' Diameter From 40' Mounting Height
FSIR100	Wattstopper Fsir-100 Wireless Configuration Tool for Fsp-211
SUB "UNV" WITH "480"	480 Volt
EM8	Emergency Battery Back Up 8W

\* Please contact LITELUME for all Custom Option Requests

## Buy American Act Compliant Ordering Information

Part #	Description
BAA-WPMFC	Buy American Act Compliant for Wallpack Medium Full Cutoff

\* Please contact LITELUME for all Custom Option Requests