



# Wall Pack Quarter Sphere



## Description

The Wall Pack Quarter Sphere (LL-WPQS) provides multiple wattages of down light. Featuring high performance LEDs and a long lasting driver, this fixture provides effective lighting all around. It can be used around retail malls, restaurants, dealerships, shopping centers, and hospitality

## Fixture Information

Size:	15W/30W/50W/72W SELECTABLE
Housing:	Die cast aluminum body
Lens:	Glass
Finish:	UV Stabilized Powder coated finish
Color:	Standard: Bronze Custom options available
CRI:	70+
THD:	20%
Power Factor:	.90
Voltage:	Standard: 120-277V
Warranty:	10 Year Warranty

## Performance Data

### Lumen Output:

1800 to 8640 lm

### Lumens Per Watt (typical):

120 lm/W

### CCT:

3000K  
4000K  
5000K

## Ratings & Certificates


UL & cUL Listed






### Dimensions

Item	Width	Height	Depth
WPQS	18.1"	9.05"	9.05"

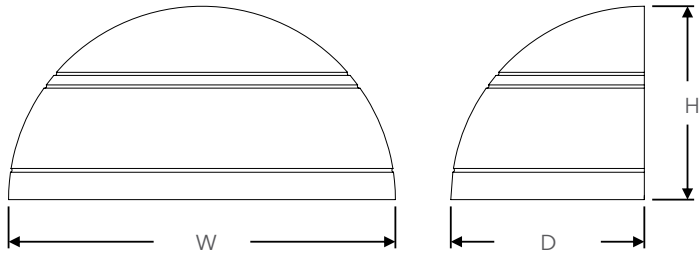

### Photometrics

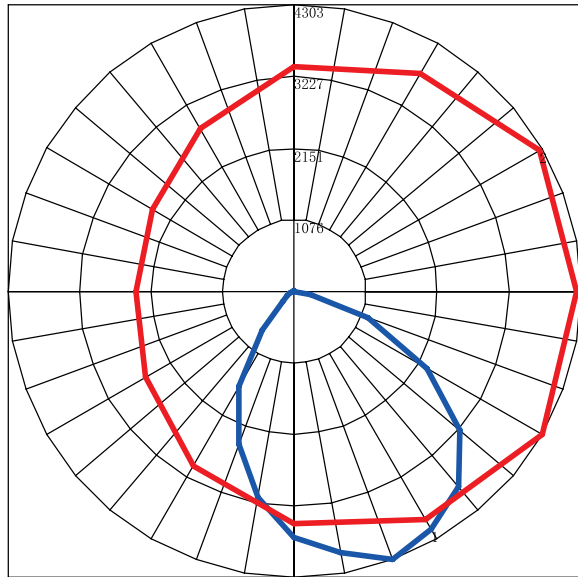



<b>Project Name</b>	
<b>Catalog #</b>	
<b>Job Type</b>	
<b>Prepared By</b>	
<b>Notes</b>	

### Fixture Ordering Information

Part #	Wattage	Lumens	Kelvin	Voltage	Finish
LL-WPQS-[15][30][50][72]-50-UNV-BZ	15W/30W/50W/72W	1800/3600/6000/8640	5000	120-277	Bronze
LL-WPQS-[15][30][50][72]-40-UNV-BZ	15W/30W/50W/72W	1800/3600/6000/8640	4000	120-277	Bronze
LL-WPQS-[15][30][50][72]-30-UNV-BZ	15W/30W/50W/72W	1800/3600/6000/8640	3000	120-277	Bronze

### Accessories Ordering Information

Part #	Description
PC	Button Photocell, 120-277V
OC	Occupancy Sensor With Dimming
EM	Emergency Battery Back Up
SS	10kv Surge