



# Square Canopy Low Profile



\*Not all product variations listed on this page are DLC qualified. Visit [www.designlights.org/search](http://www.designlights.org/search) to confirm qualification



(shown with Emergency Battery)

## Description

The LITELUME™ LED Square Canopy Low Profile Pack (LL-SCLP) boasts up to 170 lumens per watt. Featuring a sealed die-cast construction and shatter-resistant polycarbonate acrylic optical lens with UV stabilizers. Compact in design and symmetry making this luminaire ideal for walkways, parking garages, entrance ways, and over-all canopy applications.

## Fixture Information

Size:	27W/40W/60W/110W
Housing:	Die-cast Housing
Finish:	Protective powdercoat
Color:	Standard: Bronze, White
Mounting:	Ceiling
Lens:	Polycarbonate
CRI:	80
THD:	<20%
Surge Protector:	Optional: 10 kVA
Voltage:	Standard: 120-277V Custom Option: 347-480V
Sensor:	Standard: No sensor Optional: Internal Dimming Microwave Sensor or External Bi-level PIR motion sensor Remote battery back-up kit
Warranty:	10-Year Limited Warranty

## Performance Data

### Lumen Output:

3,800 to 16,000 lm

### Lumens Per Watt (typical):

130 to 170 lm/W

### CCT:

3000K  
4000K  
5000K

### Distribution

Type V

### Lifespan:

Up to 100,000 running hours

### Ratings & Certificates

UL Listed For Wet Location  
DLC Premium Qualified\*  
IP66 rated  
TAA Compliant/BAA Optional




## QuickShip Ordering Information

Part #
LL-SCLP-27-50-UNV-BZ
LL-SCLP-27-40-UNV-BZ
LL-SCLP-40-50-UNV-WH
LL-SCLP-40-50-UNV-BZ
LL-SCLP-40-40-UNV-BZ
LL-SCLP-60-50-UNV-WH
LL-SCLP-60-50-UNV-BZ
LL-SCLP-60-40-UNV-BZ
LL-SCLP-[27][40][50][60]-3CCT-UNV-BZ



## Dimension


Item	Length	Height	Width
27W	9.52"	9.52"	3.19"
40W	9.52"	9.52"	3.19"
60W	9.52"	9.52"	3.19"
110W	11.52"	11.52"	3.80"

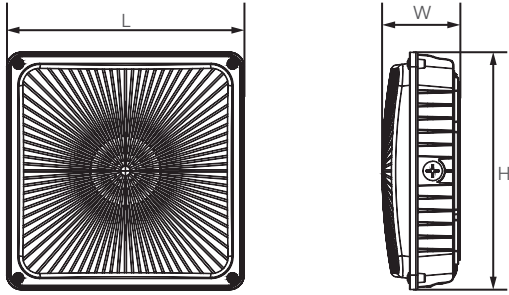

## Mounting

Standard mounting includes Pendant Mount or Direct Surface Mount.

## Photometrics

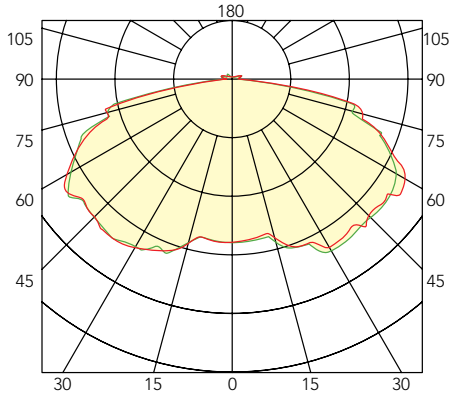



<b>Project Name</b>	
<b>Catalog #</b>	
<b>Job Type</b>	
<b>Prepared By</b>	
<b>Notes</b>	

## Fixture Ordering Information

Part #	Wattage	Lumens	Kelvin	Voltage
LL-SCLP-27-50-UNV-BZ	27	3800	5000	120-277
LL-SCLP-27-40-UNV-BZ	27	3750	4000	120-277
LL-SCLP-40-50-UNV-BZ	40	5450	5000	120-277
LL-SCLP-40-40-UNV-BZ	40	5350	4000	120-277
LL-SCLP-60-50-UNV-BZ	60	8000	5000	120-277
LL-SCLP-60-40-UNV-BZ	60	7800	4000	120-277
LL-SCLP-[27][40][50][60]-3CCT-UNV-BZ	27/40/50/60	3800/5400/6700/8000	3000K 4000K 5000K	120-277
LL-SCLP-[27][40][50][60]-3CCT-UNV-WH	27W/40W/50W/60W	3800/5400/6700/8000	3000K 4000K 5000K	120-277
LL-SCLP-[40][60][85][110]-3CCT-UNV-BZ	40W/60W/85W/110W	7000/10000/13000/16000	3000K 4000K 5000K	120-277

## QuickShip Ordering Information

Part #
LL-SCLP-27-50-UNV-BZ
LL-SCLP-27-40-UNV-BZ
LL-SCLP-40-50-UNV-WH
LL-SCLP-40-50-UNV-BZ
LL-SCLP-40-40-UNV-BZ
LL-SCLP-60-50-UNV-WH
LL-SCLP-60-50-UNV-BZ
LL-SCLP-60-40-UNV-BZ
LL-SCLP-[27][40][50][60]-3CCT-UNV-BZ

## Accessories Ordering Information

Part #	Description
US002-01VR-2	Haisen 10.5 - 15V DC 0-10V Dimming Microwave Motion Sensor
HD05R	Haisen Universal Smart Remote Control
BRI819P-B-D	Sharkward 120-277V 0-10V Microwave Motion Sensor
RC-100	Remote Control 100
C-EM-R-BZ	Remote Emergency Batter Back-Up Kit for Canopy 8W Bronze

\* Please contact LITELUME for all Custom Option Requests

## Buy American Act Compliant Ordering Information

Part #	Description
BAA-SCLP	Buy American Act Compliant for Square Canopy Low Profile

\* Please contact LITELUME for all Custom Option Requests