



Application

For use with lighting equipment, communications and electrical equipment, emergency lighting equipment and fire alarm & security systems.

Features:


- Valve-regulated and safe to discharge in any position.
- Completely sealed and maintenance free, low self-discharge.
- Impact-resistant ABS housing.
- Will last up to 5 Years in standby applications and 200 to 1,000 cycles in cyclic applications depending on depth of discharge.
- Available in a variety of sizes and amp ratings.
- Provides reliable power output in a variety of applications, resulting in greater efficiency and improved ability to recover from deep discharge.
- Cycle or Standby use.
- Low resistance safety feature makes the batteries easy to recharge & maximizes energy output.
- Standard F1 or F2 "fl at lugs" type terminal.

Warranty/Listing:

- Batteries are prorated for two years.



Dimensions:

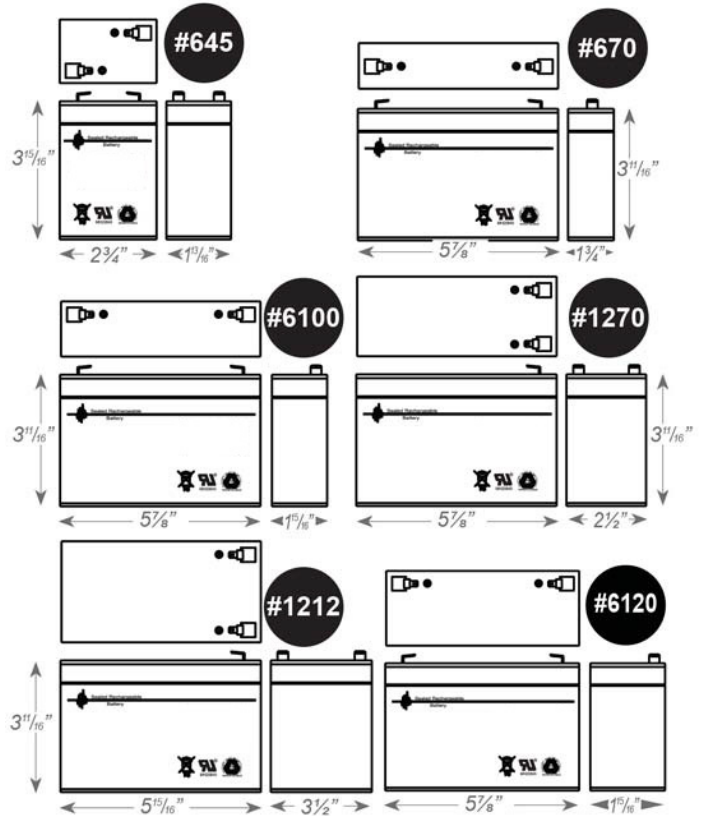



| | |
|---------------------|--|
| Project Name | |
| Catalog # | |
| Job Type | |
| Prepared By | |
| Notes | |

Fixture Ordering Information

| Model | Number | Nominal Voltage | Nominal Current | Weight |
|-------|--------|-----------------|-----------------|---------|
| LL-BL | 645 | 6 volts | 4.5 Amp-HR | 1.6 lbs |
| | 670 | 6 volts | 7.0 Amp-HR | 2.4 lbs |
| | 6100 | 6 volts | 10.0 Amp-HR | 3.4 lbs |
| | 6120 | 6 volts | 12.0 Amp-HR | 4.0 lbs |
| | 1212 | 12 volts | 12.0 Amp-HR | 8.4 lbs |
| | 1270 | 12 volts | 7.0 Amp-HR | 4.9 lbs |