# LL-FPR3

## Flat Panel Round 3"

The LL-FPR3 Series Flat Panel Canless Downlight delivers sleek performance and versatility for modern spaces. Available in 3" with 5 CCT field selectable color temperatures ranging from 2700K to 5000K. High Performance LED's provide a vibrant light. Easy recessed installation without a housing makes it ideal for both new construction and retrofit applications. Where a frame kit is needed, we offer a universal frame kit.

### PERFORMANCE DATA

| | |
|---|---|
| **Lumen Output** | 400 lm |
| **Lumens Per Watt (typical)** | 80 lm/W |
| **CCT - Field Selectable** | 2700K 3000K 3500K 4000K 5000K |
| **Lifespan** | 181,000 hrs |

### RATINGS & CERTIFICATES

cETLus • Energy Star • FCC • IC Rated
Wet Location • Interior / Exterior

### APPLICATIONS

New Construction • Retrofit & Remodel

### FIXTURE INFORMATION

| Size | Housing | Finish | Trim Finish | Beam Angle | Warranty |
|---|---|---|---|---|---|
| 5W | White Aluminum | Premium Powder Coat | White | 110° | 10 Year |

| Voltage | Dimming | Electrical | | PF | THD | CRI |
|---|---|---|---|---|---|---|
| 120V | Triac Dimming @ 120V | 0.5kV Surge Protection | Type IC | .90 | <20% | 90 |

**Operating Temperature:** -4°F to 113°F


LITELUME™ seeks to deliver the most advanced and efficient LED technology. Due to technology progression, specifications may change. We reserve the right to update product specifications without notice. Contact LITELUME™ for the most up-to-date data.

## DIMENSIONS

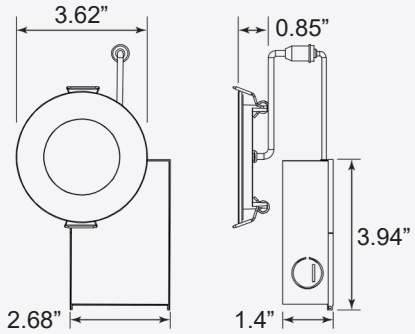


| Length (in) | Width (in) | Height (in) | Weight (lbs) |
|---|---|---|---|
| 3.62 | 3.62 | 0.85 | 0.44 |

| Junction Box Size (in) | 3.94 x 2.68 x 1.4 |
|---|---|

## LUMEN TABLES

| Measurements | Lumens | | | | |
|---|---|---|---|---|---|
| | 2700K | 3000K | 3500K | 4000K | 5000K |
| Lumens | 469 | 484 | 489 | 495 | 495 |
| Watts | 5.85 | 5.77 | 5.74 | 5.89 | 5.91 |
| Efficacy | 80.17 | 83.88 | 85.19 | 84.04 | 83.76 |

## COMPATIBLE DIMMERS AND CONTROLS

### Lutron

- TG-600PR-WH
- SLV-600P-AL
- DVCL-153P
- S-600PR-WH
- DV-600PR-WH
- MSCL-OP153M
- CTCL-153PDH-WH
- SCL-153PH-WH
- PD-6WCL
- TGCL-153PH-LA
- GT-600P
- MACL-153M//MA-R

### Leviton

- 6672
- 6674
- IPL06
- RNL06
- DSL06


©Lite Lume Corporation 2018
www.litelume.com
info@litelume.com
833.LED.LUME

LITELUME™ seeks to deliver the most advanced and efficient LED technology. Due to technology progression, specifications may change. We reserve the right to update product specifications without notice. Contact LITELUME™ for the most up-to-date data.

# Flat Panel Round 3"

| | |
|---|---|
| PROJECT NAME | |
| CATALOG # | |
| JOB TYPE | |
| PREPARED BY | |
| NOTES | |

## ORDERING GUIDE

| Brand | Fixture Type | Lumen Package | CCT |
|---|---|---|---|
| **LL** LITELUME | **FPR3** Flat Panel Round 3" | **4L** 400 Lumens | **KFS** Kelvin Field Selectable |

## FIXTURE ORDERING INFORMATION

| Part # | Watts | Lumens | Kelvin | Voltage | Beam |
|---|---|---|---|---|---|
| LL-FPR3-4L-KFS | 5W | 400 | 5 CCT | 120 | 110 Degree |


©Lite Lume Corporation 2018
www.litelume.com
info@litelume.com
833.LED.LUME

LITELUME™ seeks to deliver the most advanced and efficient LED technology. Due to technology progression, specifications may change. We reserve the right to update product specifications without notice. Contact LITELUME™ for the most up-to-date data.