

Features:

- Anti-corrosion, waterproof IP65
- Free blue light hazard, light efficiency up to 150LM/W
- Easy installation and wide application
- Patent Tunable Spectrum (USPN 9,820,447;10,159,198; CAPN (CA2994308C)
- Pure aluminum heatsink, low heat
- Various Spectrum and customization.

Warranty/Listing:


- 10-year standard warranty.



Specifications:

Input Voltage	Operating Temperature
AC110-277V	-20°C to 40°C
Power	THD
12W-48W	<20%
Frequency	Efficacy
50/60Hz	150 lm/w
PPE	Lifespan
2.0 μmol/J	50,000 hrs
Power Factor	
> 0.95	





Dimensions:

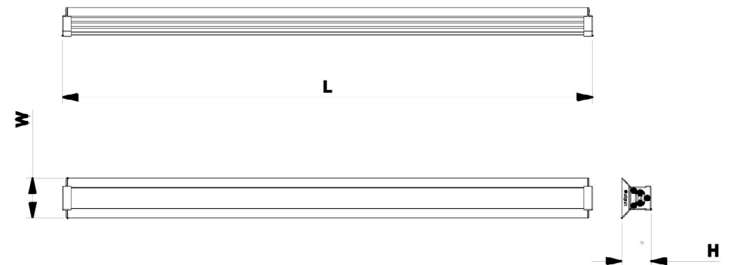

Wattage	L	W	H
12W	12"	1.8"	1.2"
18W	18.7"	1.8"	1.2"
24W	22.6"	1.8"	1.2"
36W	34.4"	1.8"	1.2"
48W	46.2"	1.8"	1.2"



Electrical Data:

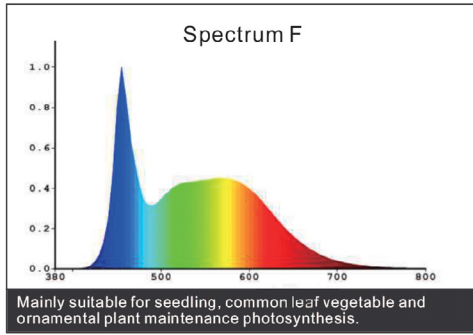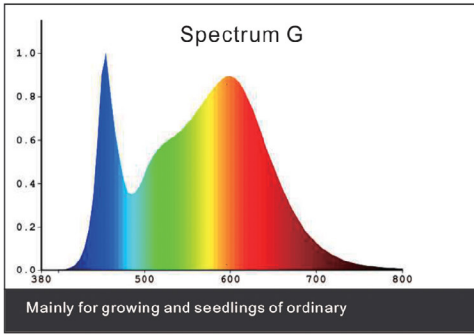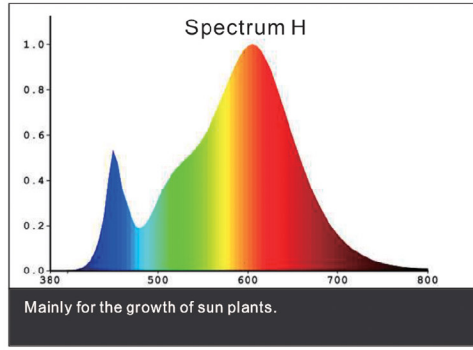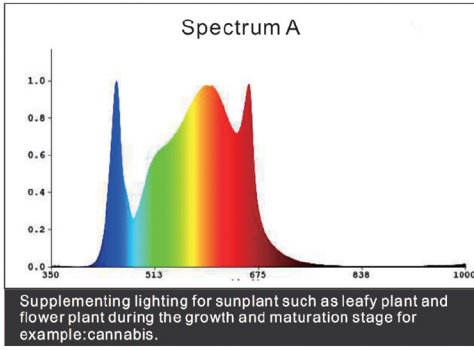



Project Name	
Catalog #	
Job Type	
Prepared By	
Notes	

Fixture Ordering Information

Model	Power	
LL-CTT5	12	12W
	18	18W
	24	24W
	36	36W
	48	48W