



Post Top Lantern Small



*Not all product variations listed on this page are DLC qualified. Visit www.designlights.org/search to confirm qualification



Description

The LITELUME™ LED POST TOP LANTERN SMALL (LL-PTLS) features a polyester powder coated die-cast aluminum housing for long-lasting durability. Glare free polycarbonate lens, smooth design and beautiful finished look makes this post top luminaire an excellent choice.

Applications: Municipality, Pathway, Perimeter, Pedestrian and Walkway lighting.

Fixture Information

Size:	30W/60W/90W
Housing:	Die-cast Aluminum Housing
Finish:	Protective powdercoat
Color:	Standard: Bronze, Black Custom Options: White (WH) and Gray (GY)
Mounting:	Mounting: Standard: Tenon fits 3" OD Optional: Tenon adapters & reducers
Dimming:	Standard: 0-10V
Power Factor:	.95
CRI:	80
Voltage:	Standard: 120-277V
Sensor:	Standard: No sensor
Warranty:	10-Year Limited Warranty

Performance Data

Lumen Output:

3600 to 11000 lm

Lumens Per Watt (typical):

108-125 lm/W

CCT:

3000K
4000K
5000K

Distribution:

T5

Lifespan:

100,000 hours

Ratings & Certificates

ETL Listed for Wet Location
IP65 Listed
DLC Premium Listed



Intertek


QuickShip Ordering Information

Part #
LL-PTLS-30-3CCT-UNV-T5-BK
LL-PTLS-30-3CCT-UNV-T5-BK-PCT
LL-PTLS-60-3CCT-UNV-T5-BK
LL-PTLS-60-3CCT-UNV-T5-BK-PCT
LL-PTLS-90-3CCT-UNV-T5-BK
LL-PTLS-90-3CCT-UNV-T5-BK-PCT




Dimensions


Item	Width	Length
Post Top Lantern Small	13.8"	25"

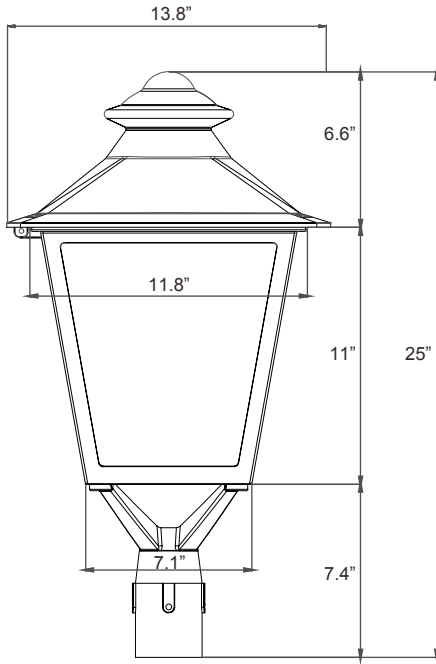

Photometrics

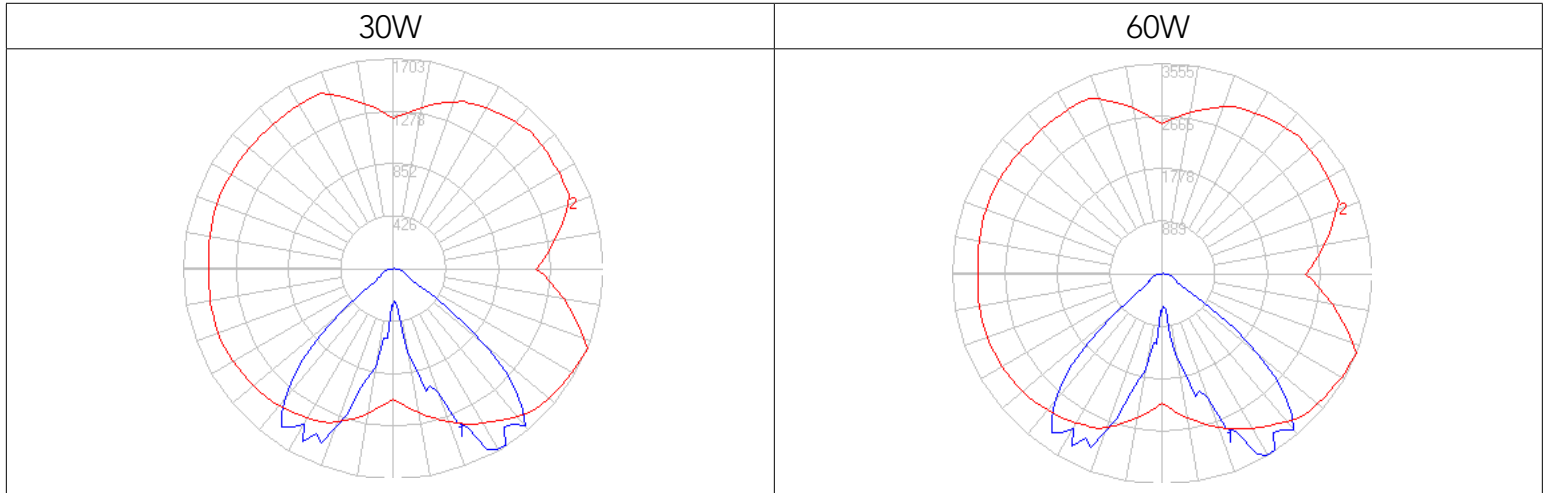


Other Images

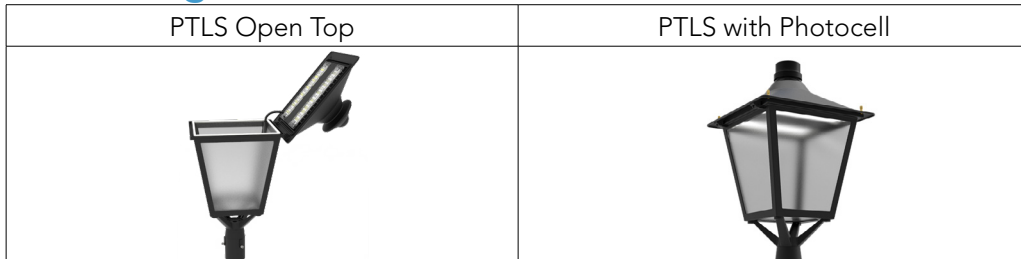



CCT Select & Power Select

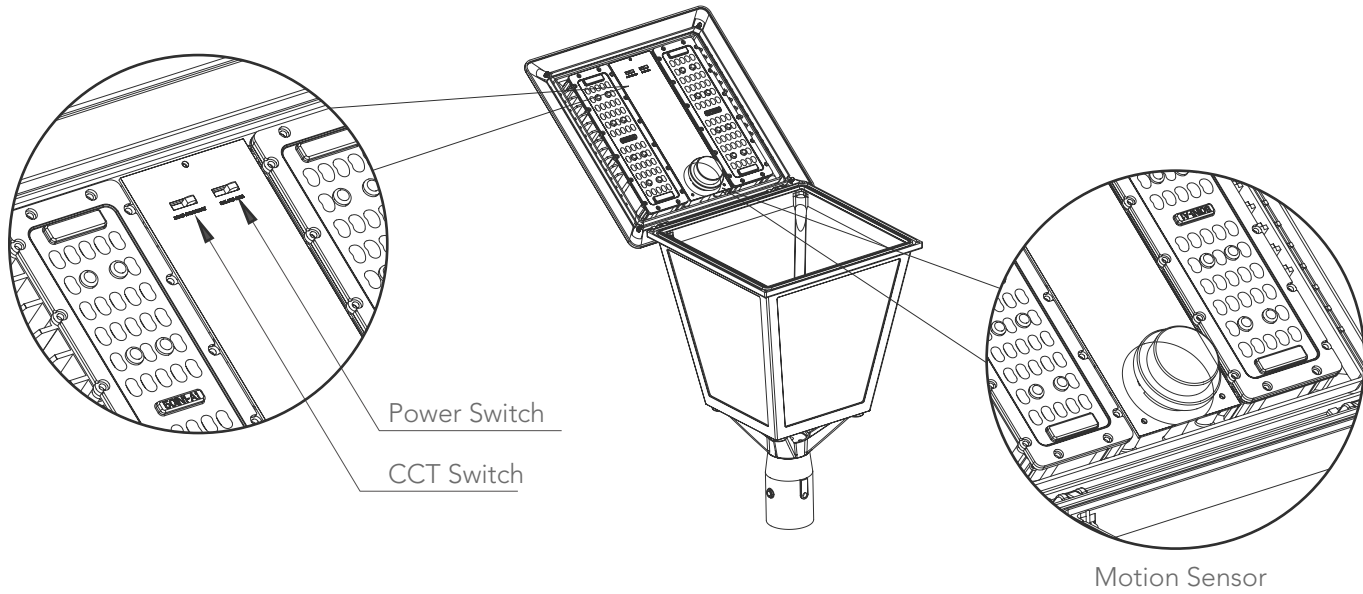



Project Name	
Catalog #	
Job Type	
Prepared By	
Notes	

Fixture Ordering Information

Part #	Wattage	Lumens	Kelvin	Voltage	Type Distribution
LL-PTLS-30-3CCT-UNV-T5-BZ	30	3600	3000K 4000K 5000K	120-277	T5
LL-PTLS-30-3CCT-UNV-T5-BK	30	3600	3000K 4000K 5000K	120-277	T5
LL-PTLS-30-3CCT-UNV-T5-BZ-PCT	30	3600	3000K 4000K 5000K	120-277	T5
LL-PTLS-30-3CCT-UNV-T5-BK-PCT	30	3600	3000K 4000K 5000K	120-277	T5
LL-PTLS-60-3CCT-UNV-T5-BZ	60	7500	3000K 4000K 5000K	120-277	T5
LL-PTLS-60-3CCT-UNV-T5-BK	60	7500	3000K 4000K 5000K	120-277	T5
LL-PTLS-60-3CCT-UNV-T5-BZ-PCT	60	7500	3000K 4000K 5000K	120-277	T5
LL-PTLS-60-3CCT-UNV-T5-BK-PCT	60	7500	3000K 4000K 5000K	120-277	T5
LL-PTLS-90-3CCT-UNV-T5-BZ	90	11000	3000K 4000K 5000K	120-277	T5
LL-PTLS-90-3CCT-UNV-T5-BK	90	11000	3000K 4000K 5000K	120-277	T5
LL-PTLS-90-3CCT-UNV-T5-BZ-PCT	90	11000	3000K 4000K 5000K	120-277	T5
LL-PTLS-90-3CCT-UNV-T5-BK-PCT	90	11000	3000K 4000K 5000K	120-277	T5

* Please contact LITELUME for all Custom Option Requests

QuickShip Ordering Information

Part #
LL-PTLS-30-3CCT-UNV-T5-BK
LL-PTLS-30-3CCT-UNV-T5-BK-PCT
LL-PTLS-60-3CCT-UNV-T5-BK
LL-PTLS-60-3CCT-UNV-T5-BK-PCT
LL-PTLS-90-3CCT-UNV-T5-BK
LL-PTLS-90-3CCT-UNV-T5-BK-PCT

Accessories Ordering Information

Part #	Description
238RRABZ	2 3/8" Reducer Round Adapter Bronze
4RABZ	4" Round Adapter Bronze
5RABZ	5" Round Adapter Bronze
238RRABK	2 3/8" Reducer Round Adapter Black
4RABK	4" Round Adapter Black
5RABK	5" Round Adapter Black
PCT7	7 Pin Receptacle
MSP	Internal Microwave Motion Sensor

* Please contact LITELUME for all Custom Option Requests