



# Post Top Acorn



## Description

The LITELUME™ LED POST TOP ACORN (LL-PTA) features an anti-corrosion, electrostatic polyester powder coated heavy duty die-cast aluminum housing for long-lasting durability. Glare free polycarbonate lens, radiator heat-releasing design and beautiful finished look makes this post top luminaire an excellent choice.

Applications: Municipality, Pathway, Perimeter, Pedestrian and Walkway lighting.

## Fixture Information

Size:	30W/50W/60W/80W/100W
Housing:	Die-cast Aluminum Housing
Finish:	Protective powdercoat
Color:	Standard: Bronze, Black Custom Options: White (WH) and Gray (GY)
Mounting:	Tenon fits 3" standard OD
Power Factor:	.95
CRI:	80
Dimming:	Standard: 0-10V
Voltage:	Standard: 120-277V
Sensor:	Standard: No sensor Optional: Photocell
Warranty:	10-Year Limited Warranty

## Performance Data

### Lumen Output:

3600 to 11600 lm

### Lumens Per Watt (typical):

120 to 140 lm/W

### CCT:

3000K  
4000K  
5000K

### Distribution:

T5

### Lifespan:

Up to 100,000 running hours

### Ratings & Certificates

ETL Listed for Wet Location  
IP65 Listed




Intertek




### Dimensions

Item	Diameter	Length
30W-60W	17.7"	34.1"
60W-100W	17.7"	40.7"

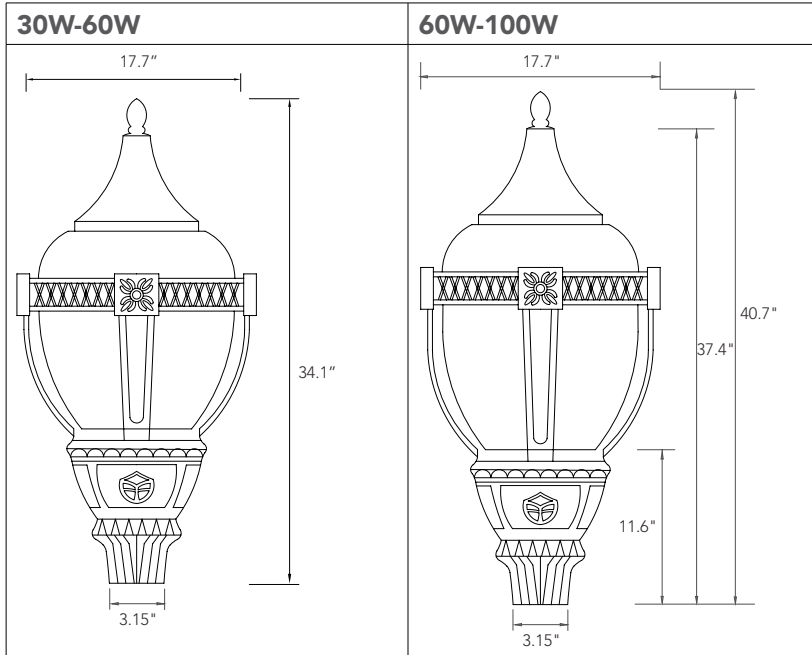


### Photometric Data

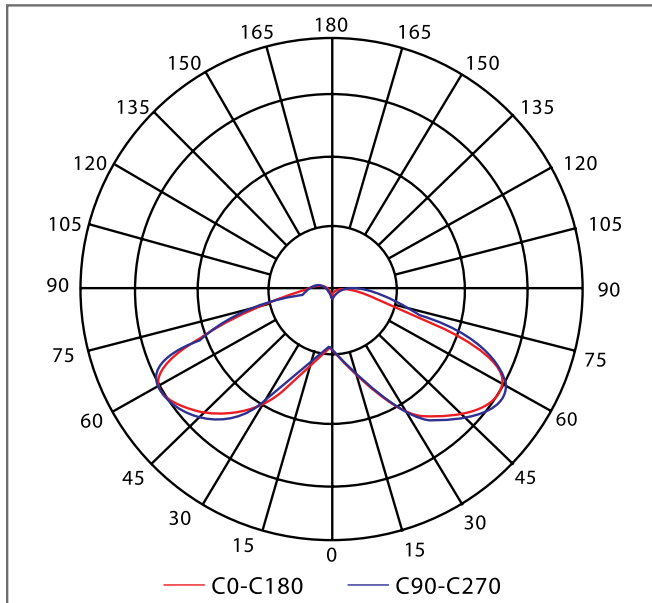



## Installation

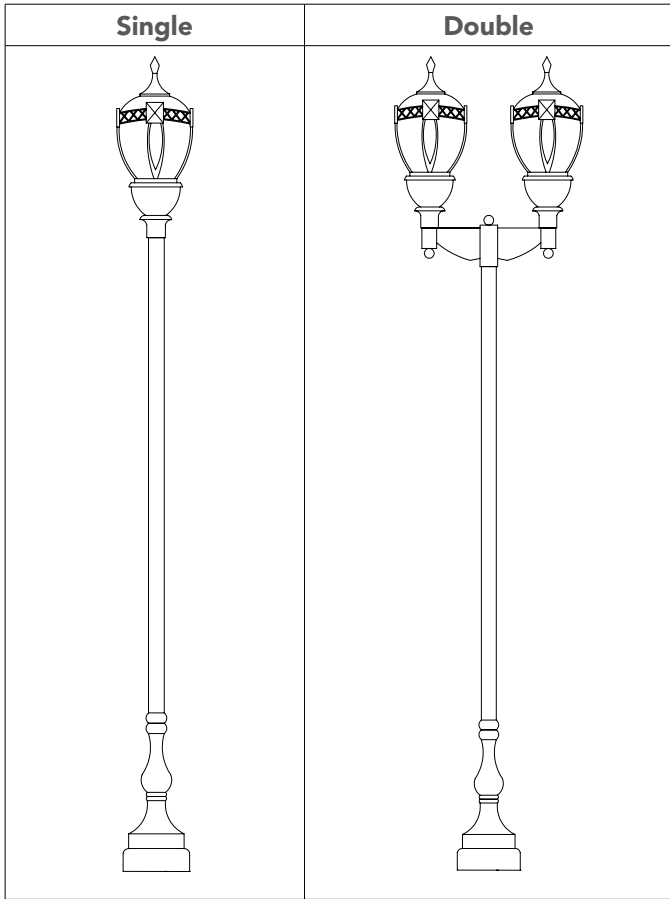

## CCT Select & Power Select






### Packing Information

Wattage	Product Dimension	Carton Box Dimension	Net Weight (1pc)	Gross Weight (1ctn)	QTY/CTN
30W-60W	17.72" x 17.72" x 37.44"	20.87" x 20.87" x 34.10"	13.67 lbs	19.80 lbs	1pc
60W-100W	17.72" x 17.72" x 37.44"	21.26 "x 21.26" x 38.58"	18.74 lbs	26.00 lbs	1pc

### Carton Box

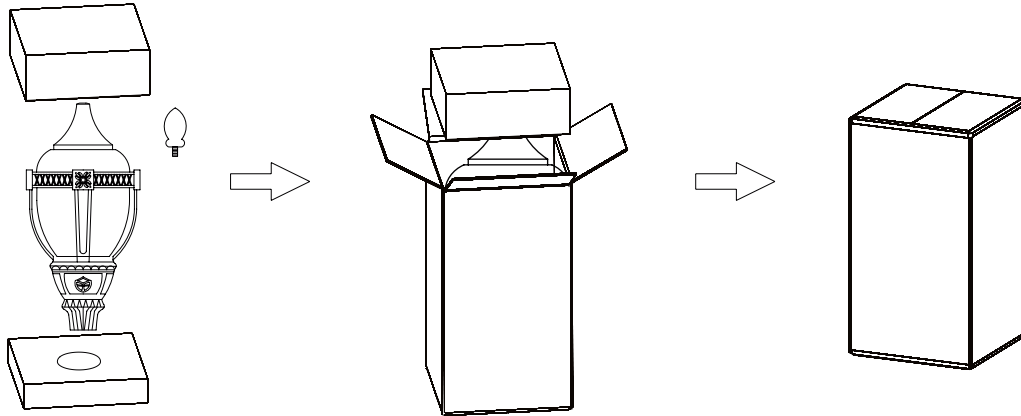



<b>Project Name</b>	
<b>Catalog #</b>	
<b>Job Type</b>	
<b>Prepared By</b>	
<b>Notes</b>	

## Fixture Ordering Information

Part #	Wattage	Lumens	Kelvin	Voltage	Type Distribution
LL-PTA-[30][50][60]-3CCT-UNV-T5-BZ	30W / 50W / 60W	3600/6000 /7200	3000K 4000K 5000K	120-277	T5
LL-PTA-[30][50][60]-3CCT-UNV-T5-BK	30W / 50W / 60W	3600/6000 /7200	3000K 4000K 5000K	120-277	T5
LL-PTA-[60][80][100]-3CCT-UNV-T5-BZ	60W / 80W / 100W	7200/9300 /11600	3000K 4000K 5000K	120-277	T5
LL-PTA-[60][80][100]-3CCT-UNV-T5-BK	60W / 80W / 100W	7200/9300 /11600	3000K 4000K 5000K	120-277	T5

\* Please contact LITELUME for all Custom Option Requests

## Accessories Ordering Information

Part #	Wattage
SUB "UNV" WITH "480"	480 Volt <b>**Must Specify Wattage &amp; Kelvin**</b>
PC	Button Photocell, 120-277V
238RRABZ	2 3/8" Reducer Round Adapter Bronze
4RABZ	4" Round Adapter Bronze
5RABZ	5" Round Adapter Bronze
238RRABK	2 3/8" Reducer Round Adapter Black
4RABK	4" Round Adapter Black
5RABK	5" Round Adapter Black

\* Please contact LITELUME for all Custom Option Requests