



# Wall Pack Half Round



## Description

The Wall Pack Half Round (LL-WPHR) provides multiple wattages of down light. Featuring high performance LEDs and a long lasting driver, this fixture provides effective lighting all around. It can be used around retail malls, restaurants, dealerships, shopping centers, and hospitality.

## Fixture Information

Size:	25W/45W/65W SELECTABLE
Housing:	Die cast aluminum body
Lens:	Glass
Finish:	UV Stabilized Powder coated finish
Color:	Standard: Bronze Custom options available
CRI:	80
THD:	<20%
Power Factor:	.90
Dimming:	Standard: 0-10V
Voltage:	Standard: 120-277V
Warranty:	10 Year Warranty

## Performance Data

### Lumen Output:

3085 to 8567 lm

### Lumens Per Watt (typical):

122 - 145 lm/W

### CCT:

3000K

4000K

5000K

### Distribution:

Wide Throw

Forward Throw

### Ratings & Certificates

UL & cUL Listed


Title 24 Compliant





## Dimensions

Item	Width	Height	Length
15W/30W/50W/72W	9.25"	7.1"	18.1"

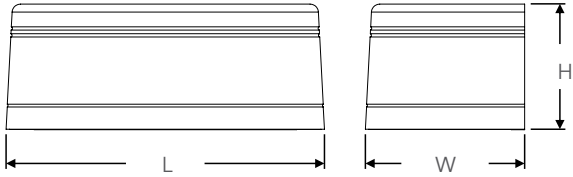

## Performance Data


CCT	25W			45W			65W		
	Lumens	Watts	Efficacy	Lumens	Watts	Efficacy	Lumens	Watts	Efficacy
3000K	3085	25.3	122	5771.9	44.4	130	7854.9	65.4	121.8
4000K	3364.9	24.7	136.1	6295.7	43.4	145	8567.7	63.1	136
5000K	3139	25.5	123.1	5873.1	44.8	131.2	7992.6	63.1	122.9

## Photometrics

### 72W Forward Throw

#### Lum. Classification System (LCS)


LCS Zone	Lumens	%Lamp	%Lum
FL (0-30)	1435.7	17.7	17.7
FM (30-60)	3152.4	38.9	38.9
FH (60-80)	1074.1	13.2	13.2
FVH (80-90)	75.5	0.9	0.9
BL (0-30)	1025.2	12.6	12.6
BM (30-60)	1117.1	13.8	13.8
BH (60-80)	187.0	2.3	2.3
BVH (80-90)	11.4	0.1	0.1
UL (90-100)	4.4	0.1	0.1
UH (100-180)	24.0	0.3	0.3
<b>Total</b>	<b>8106.8</b>	<b>99.9</b>	<b>100.0</b>
<b>BUG Rating</b>	<b>B3-U2-G1</b>		

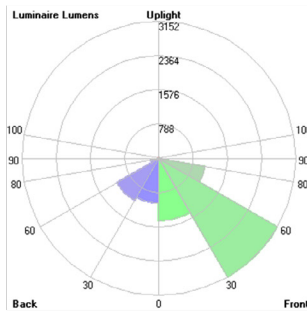


### 72W Wide Throw

#### Lum. Classification System (LCS)

LCS Zone	Lumens	%Lamp	%Lum
FL (0-30)	1530.1	17.7	17.7
FM (30-60)	3359.8	38.9	38.9
FH (60-80)	1144.7	13.2	13.2
FVH (80-90)	80.5	0.9	0.9
BL (0-30)	1092.6	12.6	12.6
BM (30-60)	1190.6	13.8	13.8
BH (60-80)	199.3	2.3	2.3
BVH (80-90)	12.1	0.1	0.1
UL (90-100)	4.7	0.1	0.1
UH (100-180)	25.6	0.3	0.3
<b>Total</b>	<b>8640.0</b>	<b>99.9</b>	<b>100.0</b>
<b>BUG Rating</b>	<b>B3-U2-G1</b>		

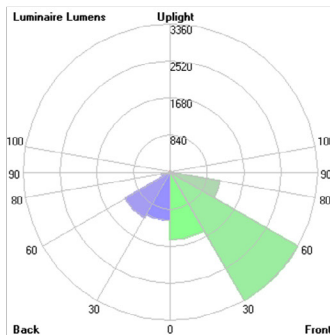

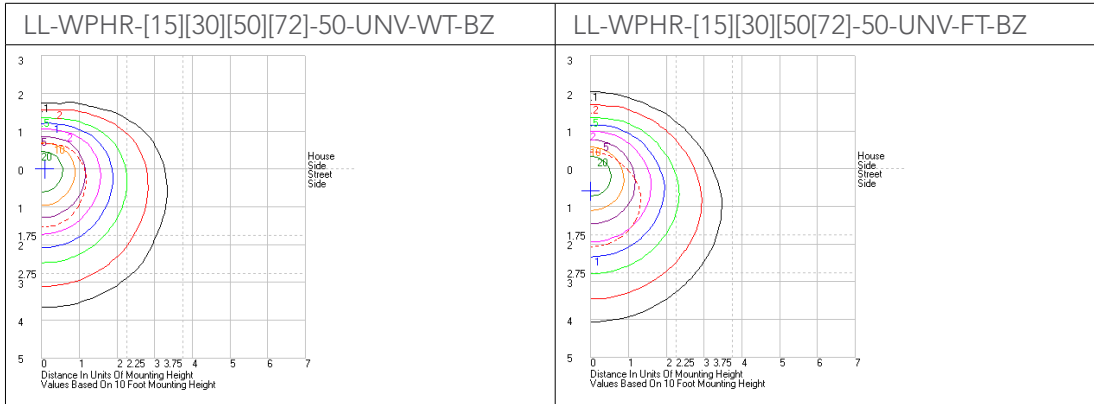



<b>Project Name</b>	
<b>Catalog #</b>	
<b>Job Type</b>	
<b>Prepared By</b>	
<b>Notes</b>	

### Fixture Ordering Information

Part #	Wattage	Lumens	Kelvin	Voltage	Distribution	Finish
LL-WPHR-[25][45][65]-3CCT-UNV-FT-BZ	25W/45W/65W	3364/6295/8567	3000K 4000K 5000K	120-277	Forward Throw	Bronze
LL-WPHR-[25][45][65]-3CCT-UNV-WT-BZ	25W/45W/65W	3364/6295/8567	3000K 4000K 5000K	120-277	Wide Throw	Bronze

\* Please contact LITELUME for all Custom Option Requests

### Accessories Ordering Information

Part #	Description
PC	Button Photocell, 120-277V
OC	Occupancy Sensor
EM	Emergency Driver
SS	10KV Surge