



# Wallpack Large



## Description

The LITELUME™ Wallpack Large (LL-WPL) features a die-cast aluminum housing with a glass optical lens for long-lasting durability. Installation can be done without opening the driver box. CCT and Wattage Selectable.

Applications: Hallway, Perimeter lighting and Walkway lighting.

## Fixture Information

Size:	40W/61W/79W/100W
Housing:	Die-cast Aluminum Housing
Finish:	Protective powdercoat
Color:	Standard: Bronze Custom Options: Black (BK) White (WH) Grey (GY)
Mounting:	Standard: Wall Mount
Lens:	Glass
Surge Protector:	Optional: 10 kVA
Voltage:	Standard: 120-277V
Power Factor:	.90
CRI:	80
Operating Temperature:	-40°F to 104°F
Sensor:	Standard: No sensor Custom: Button Photocell (120-277V)
Warranty:	10-Year Limited Warranty

## Quick Ship Ordering Information

<b>Part #</b>
LL-WPL-[40][61][79][100]-3CCT-UNV-BZ

## Performance Data

### Lumen Output:

6000 to 12,400 lm

### Lumens Per Watt (typical):

132-137 lm/W

### CCT:

3000K  
4000K  
5000K

### Lifespan:

Up to 100,000 running hours

### Ratings & Certificates

UL Listed For Wet Location  
Title 24 Compliant  
TAA Compliant/BAA Optional







### Dimension

Item	Width	Length	Height	Weight
Wallpack Large	7.40"	14.21"	9.25"	15 lb
Wallpack Large w/Sensor	7.40"	14.21"	10.00"	15 lb

#### Without Sensor

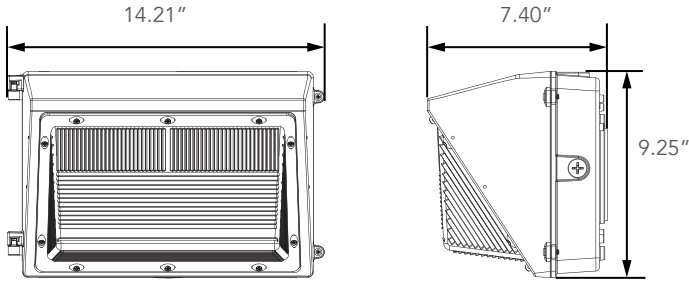


#### With Sensor

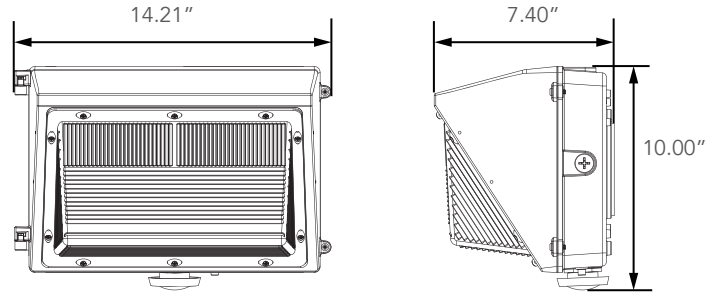

### Photometrics

#### Luminous Intensity Distribution Curve

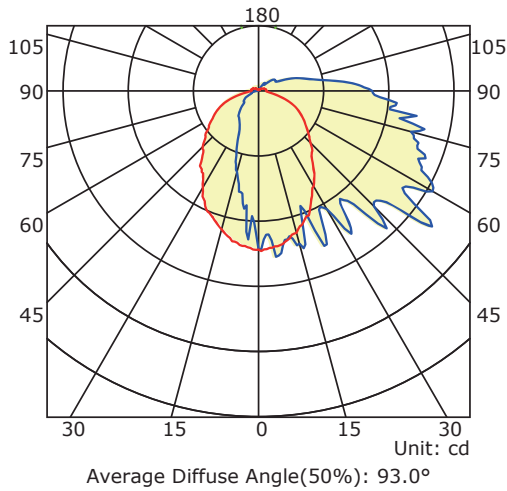

### Structural Design

**Photocell (Option)**  
Optional photocell allows for security and energy saving

**Power and CCT controller**  
The wattage and CCT can be changed by switch selection on the controller, it is easy and very fast to meet the varied requirements

**Emergency (Option)**  
8W Emergency battery, 900lm, 90min.  
Only suitable for 27W,45W,65W,70W

**Occupancy sensor (Optional)**

**Mounting**  
The external portable mounting plate makes installation super easy and simple. There's no need to open fixture housing, nor drill on housing, which greatly minimize the risk of water ingress.



<b>Project Name</b>	
<b>Catalog #</b>	
<b>Job Type</b>	
<b>Prepared By</b>	
<b>Notes</b>	

### Fixture Ordering Information

Part #	Wattage	Lumens	Kelvin	Voltage
LL-WPL-[40][61][79][100]-3CCT-UNV-BZ	40/61/79/100	6000/8500/10100/12400	3000K/4000K/5000K	120-277

### Quick Ship Ordering Information

<b>Part #</b>
LL-WPL-[40][61][79][100]-3CCT-UNV-BZ

### Accessories Ordering Information

Part #	Wattage
PC	Button Photocell, 120-277V
BRI823-B-D	Sharkward 120-277V 0-10V PIR Sensor
RC-100	Remote Control 100
EM8	Emergency Battery Back Up 8W

\* Please contact LITELUME for all Custom Option Requests

### Buy American Act Compliant Ordering Information

Part #	Description
BAA-WPL	Buy American Act Compliant for Wallpack Large

\* Please contact LITELUME for all Custom Option Requests