



Description

The LITELUME™ LED CIRCLE (LL-CIRCLE) incorporates a simple design with even distribution of lighting in this modern luminaire. Features a die-formed cold rolled steel housing with a high transmission PC lens for a soft appearance. Available in selectable wattage & CCT, high power factor and low THD.

Applications: commercial, residential, hospitality and entertainment.

Fixture Information

Size:	18W/24W/30W
Housing:	Die-formed cold rolled steel
Finish:	Protective powder coat
Color:	Standard: White (WH) Optional: Black (BK) Optional: Grey (GY) Optional: Bronze (BZ) Optional: CUS (CUS)
Mounting:	Standard: Ceiling Mount
Lens:	PC
CRI:	80
Power Factor:	.90
THD:	<10%
Dimming:	Standard: 0-10V
Voltage:	Standard: 120-277V
Warranty:	10-Year Limited Warranty

Performance Data

Lumen Output:

2111 to 3574 lm

Lumens Per Watt (typical):

120 lm/W

CCT:

3000K
4000K
5000K

Ratings & Certificates


UL Listed for damp locations





Dimension

Item	Diameter	Height
LL-CIRCLE	9.85"	2.09"

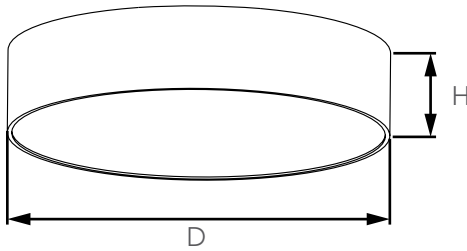

Control Module




WATT/CCT
SELECTABLE



Selectable CCT
Three position sliding switch
3000K/4000K/5000K



Selectable Power
Three position sliding switch
18W/24W/30W

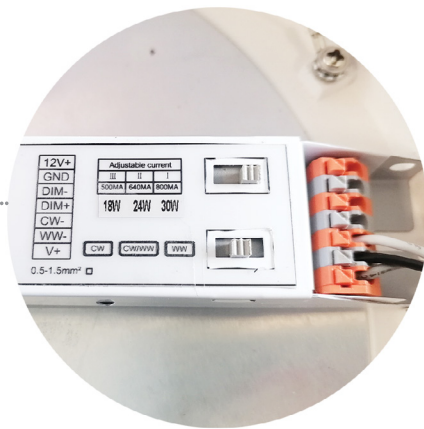


Accessories

<p>EM4</p> 	<p>ANT-3C</p> 	<p>RC-100</p> 
---	---	---




Photometrics


LL-CIRCLE 30W 3000K

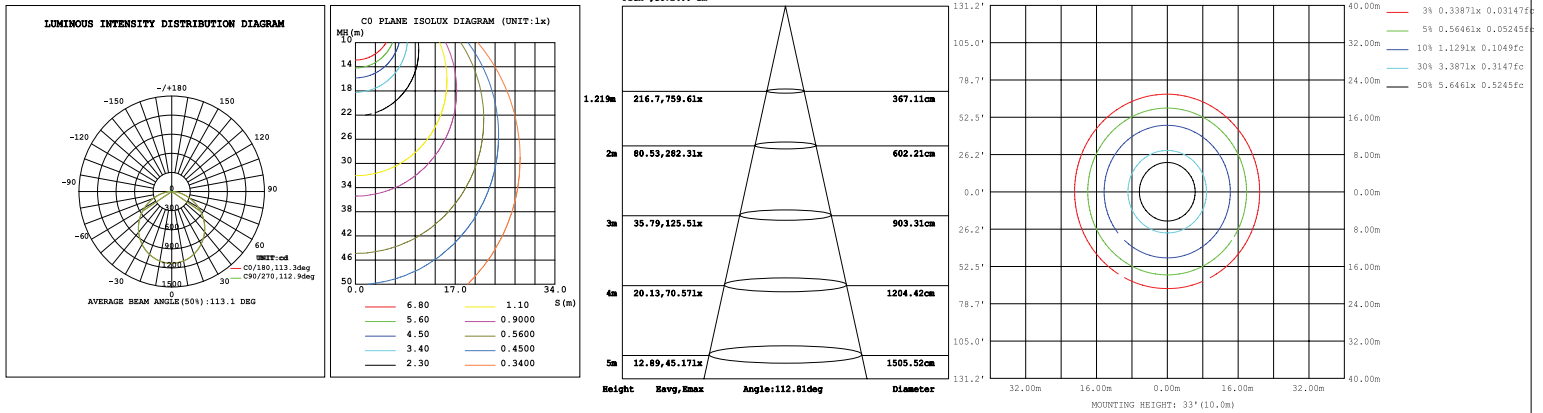

LL-CIRCLE 30W 4000K

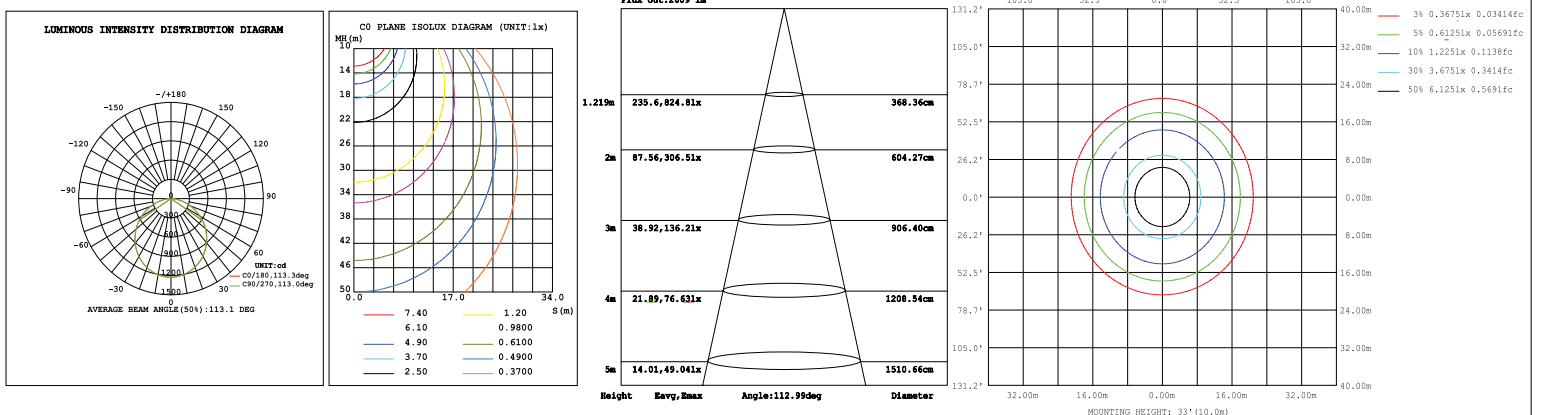

LL-CIRCLE 30W 5000K

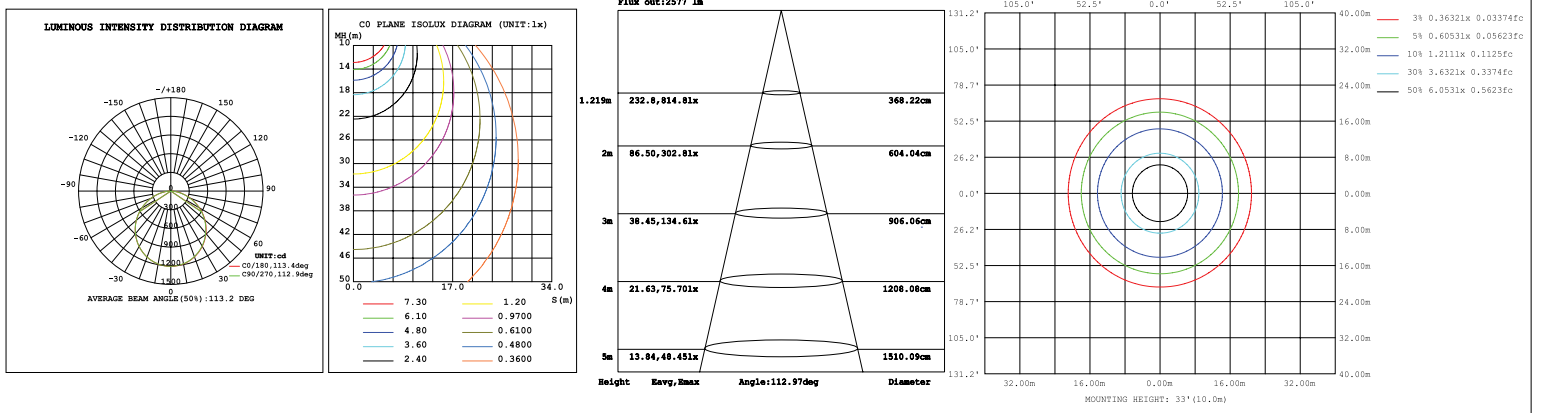



Project Name	
Catalog #	
Job Type	
Prepared By	
Notes	

Fixture Ordering Information

Part #	Wattage	Lumens	Kelvin	Voltage	Color
LL-CIRCLE-[18][24][30]-3CCT-UNV-WH	18W/24W/30W	2111/2960/3574	3000K 4000K 5000K	120-277V	White
LL-CIRCLE-[18][24][30]-3CCT-UNV-BK	18W/24W/30W	2111/2960/3574	3000K 4000K 5000K	120-277V	Black
LL-CIRCLE-[18][24][30]-3CCT-UNV-GY	18W/24W/30W	2111/2960/3574	3000K 4000K 5000K	120-277V	Grey
LL-CIRCLE-[18][24][30]-3CCT-UNV-BZ	18W/24W/30W	2111/2960/3574	3000K 4000K 5000K	120-277V	Bronze
LL-CIRCLE-[18][24][30]-3CCT-UNV-CUS	18W/24W/30W	2111/2960/3574	3000K 4000K 5000K	120-277V	Custom

Accessories Ordering Information

Part #	Description
ANT-3C	Sharkward 10-14V DC 0-10V Microwave Motion Sensor
RC100	Remote Control 100
EM4	Emergency Battery Back Up, 4W, 90 Minutes

* Please contact LITELUME for all Custom Option Requests