



Description

Reduced Profile All LED Exit & Emergency Thermoplastic Combo

Illumination:

- Ultra-bright, energy efficient, long-life Red or Green LED EXIT sign illumination.
- Ultra-bright, energy efficient, long-life White LED adjustable LED lamp heads provide up to 30-ft center-to-center spacing with 3-ft path of egress at 10-ft mounting height.
- 1.5 watt (3 LEDs x 0.50 watt) per head.
- Unique all-inclusive lamp, reflector and lens assembly

Electrical:

- Dual 120/277 voltage.
- Unique bi-color LED indicator light alerts occupant on battery condition (Green-normal, Red-check battery).
- 3.6V long life, maintenance-free, rechargeable NiCd battery.
- Internal solid-state transfer switch automatically connects the internal battery to LED lamp heads for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.

Mounting:

- Mounting canopy included for top or end mount
- Universal knockout pattern on back plate for wall mount.

Housing:

- Injection-molded, engineering grade, 5VA flame retardant, high impact resistant, thermoplastic in white or black finish.]
- Snap-out Chevron directional indicators

Warranty/Listing:


- RC: Remote capacity of 2.5 watts.
- SDT: Self-diagnostic feature performs monthly, biannual, and annual tests to ensure reliable operation and meets electrical and life safety codes.

Warranty/Listing:

- Seven year warranty on all electronics and housing. Batteries pro rated for five years.
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes
- UL Listed for damp locations (0°C – 50°C).
- Certified to CEC under Title 20 Regulations



Dimensions:

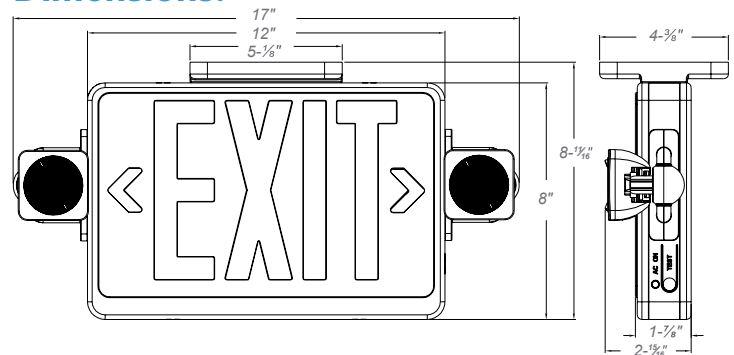



Project Name	
Catalog #	
Job Type	
Prepared By	
Notes	

Fixture Ordering Information

Model	No. of Faces		Letter Color		Housing Color		Options	
LL-CEM	1	Universal Single/ Double Face	R G	Red Green	W B	White Black	RC SDT USA	Remote Capacity Self Diagnostics Assembled in USA