



Harbor Classic Sconce



Description

The LITELUME™ Harbor Classic Sconce (LL-HC) luminaire features a die-cast aluminum housing in black or white with a polycarbonate lens. Offering a standard 15w model in 3000k, high power factor and low THD.

Applications: commercial, residential, hospitality and entertainment.

Fixture Information

Size:	15W
Housing:	Die-formed cold rolled steel
Finish:	Protective powder coat
Color:	Standard: Black (BK) Optional Special Order: White (WH)
Mounting:	Standard: Wall Mount
Lens:	Polycarbonate
CRI:	*90 (3000K only) 80
THD:	<10%
Power Factor:	.90
Sensor:	Standard: None Optional: Photocell
Voltage:	Standard: 120V
Warranty:	10-Year Limited Warranty

Performance Data

Lumen Output:

680 lm

Lumens Per Watt (typical):

45 lm/W

CCT:

3000K

4000K

5000K

Ratings & Certificates

ETL/cETL Listed

Damp Location Listed


*CEC Listed, Meets Title24 JA8 Requirements





Dimension

Item	Width	Depth	Height
15W	7.8"	4.2"	9.8"

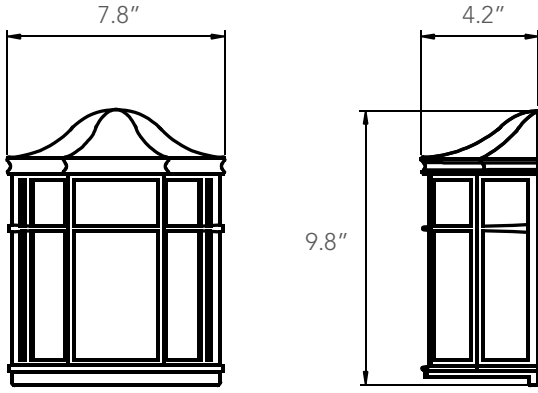



Project Name	
Catalog #	
Job Type	
Prepared By	
Notes	

Fixture Ordering Information

Part #	Wattage	Lumens	Kelvin	Voltage	Color
*LL-HC-15-30-120-BK	15	680	3000K	120	Black

* CEC Listed, Meets Title24 JA8 Requirements

Special Orders

Part #	Wattage	Lumens	Kelvin	Voltage	Color
*LL-HC-15-30-120-WH	15	680	3000K	120	White
LL-HC-15-40-120-WH	15	680	4000K	120	White
LL-HC-15-40-120-BK	15	680	4000K	120	Black
LL-HC-15-50-120-WH	15	680	5000K	120	White
LL-HC-15-50-120-BK	15	680	5000K	120	Black

* CEC Listed, Meets Title24 JA8 Requirements

Accessories Ordering Information

Part #	Description
PC	Photocell

* Please contact LITELUME for all Custom Option Requests