




LL-CAL-07

Custom Address Light Style 7

The LITELUME™ Custom Address Light Style 7 (LL-CAL-07) is a high performance LED solution with a small compact design. Each luminaire is customizable to select color finish and desired room number for hotels, apartments, condominiums, homes and offices.

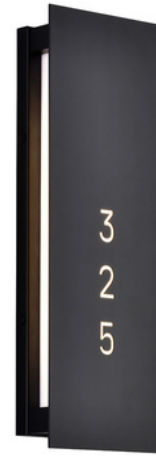

Intertek

PERFORMANCE DATA

Lumen Output	285 lm	Ratings & Certificates <ul style="list-style-type: none"> • ETL/cETL Listed • Damp Location • ADA Compliant
Lumens Per Watt (typical)	19 lm/W	
CCT	3000K 4000K	
Lifespan	50,000 hrs	

APPLICATIONS

Hotels • Apartments • Condominiums
Townhomes • General Homes

Hospitality, Multi-Family & Residential Applications

FIXTURE INFORMATION

Size	Housing	Finish	Lens	Mounting	Lettering	Color
15W	Die-formed cold-rolled steel	Protective powder coat	Acrylic	Standard: Wall Mount	Standard: Laser Engraved Optional: Braille	<ul style="list-style-type: none"> • Satin Nickel (SN) • Oil rubbed bronze (ORB) • Black (BK) • White (WH) • Gray (GY) • Custom (CUS)
Voltage	Dimming	Power Factor	CRI	Warranty	Dimensions	
Standard: 120-277V	No	.90	80	10 Year Limited	16.0" x 5.5" x 2.4"	



Custom Address Light Style 7

PROJECT NAME	
CATALOG #	
ROOM # SEQUENCE	
EXCLUDED ROOM #	
JOB TYPE	
PREPARED BY	
NOTES	

ORDERING GUIDE

Brand	Fixture Type	Model	Number Style	Lumen Package
LL LITELUME	CAL Custom Address Light	07 Style 7	LE Laser Engraved	05L 285 Lumens
Voltage	CCT	Finish		Accessories
UNV 120-277V	30 3000K 40 4000K	SN Satin Nickel ORB Oil Rubbed Bronze BK Black	WH White GY Gray CUS Custom	CRI90 90CRI B Braille

FIXTURE ORDERING INFORMATION

Part #	Watts	Lumens	Kelvin	Voltage
LL-CAL-07-LE-05L-UNV-30-SN	15	285	3000	120-277V
LL-CAL-07-LE-05L-UNV-40-SN	15	285	4000	120-277V
LL-CAL-07-LE-05L-UNV-30-ORB	15	285	3000	120-277V
LL-CAL-07-LE-05L-UNV-40-ORB	15	285	4000	120-277V
LL-CAL-07-LE-05L-UNV-30-BK	15	285	3000	120-277V



Custom Address Light Style 7

LL-CAL-07-LE-05L-UNV-40-BK	15	285	4000	120-277V
LL-CAL-07-LE-05L-UNV-30-WH	15	285	3000	120-277V
LL-CAL-07-LE-05L-UNV-40-WH	15	285	4000	120-277V
LL-CAL-07-LE-05L-UNV-30-GY	15	285	3000	120-277V
LL-CAL-07-LE-05L-UNV-40-GY	15	285	4000	120-277V
LL-CAL-07-LE-05L-UNV-30-CUS	15	285	3000	120-277V
LL-CAL-07-LE-05L-UNV-40-CUS	15	285	4000	120-277V

ACCESSORIES ORDERING INFORMATION

Part #	Description
CRI90	90 CRI
B	Braille