



### Description

The LITELUME™ Wallpack (LL-WP) All Purpose Series features a die-cast aluminum housing with a UV-resistant polycarbonate optical lens for long-lasting durability. This “one size fits all” wattages, replaces 70W-400W HID lighting boasting huge energy savings and performance.

Applications: Security, Pathway, Perimeter, Hallway and Walkway lighting.

### Fixture Information

Size:	30W/40W/65W/90W/125W
Housing:	Die-cast Aluminum Housing
Finish:	Protective powdercoat
Color:	Standard: Bronze Custom Options: Black (BK) White (WH) Grey (GY)
Mounting:	Standard: Wall Mount
Lens:	Polycarbonate
Voltage:	Standard: 120-277V
Operating Temperature:	-40°F to 104°F
Power Factor:	.95
CRI:	80
Sensor:	Standard: No sensor Custom: Button Photocell (120-277V)
Warranty:	10-Year Limited Warranty

### Quick Ship Ordering Information

Part #	Part #
LL-WP-40-50-UNV-BZ	LL-WP-90-40-UNV-BZ
LL-WP-40-40-UNV-BZ	LL-WP-125-50-UNV-BZ
LL-WP-65-50-UNV-BZ	LL-WP-125-40-UNV-BZ
LL-WP-65-40-UNV-BZ	LL-WP-[30][40][55][65]-[30][40][50]-UNV-BZ
LL-WP-90-50-UNV-BZ	

### Performance Data

**Lumen Output:**

3,550 to 15,000 lm

**Lumens Per Watt (typical):**

111 to 125 lm/W

**CCT:**

3000K  
4000K  
5000K

**Lifespan:**

Up to 100,000 running hours

**Ratings & Certificates**

UL Listed For Wet Location  
DLC Listed




### Wattage Replacement

Existing Watts	Litelume Watts
70-100W	30W
100-175W	40W
175-250W	65W
250-400W	90W
400-575W	125W




### Dimension

Item	Width	Length	Height	Weight
30W	7.20"	14.21"	9.25"	6.327 lb
40W	7.20"	14.21"	9.25"	6.525 lb
65W	7.20"	14.21"	9.25"	6.724 lb
90W	7.20"	14.21"	9.25"	7.319 lb
125W	7.20"	14.21"	9.25"	7.319 lb

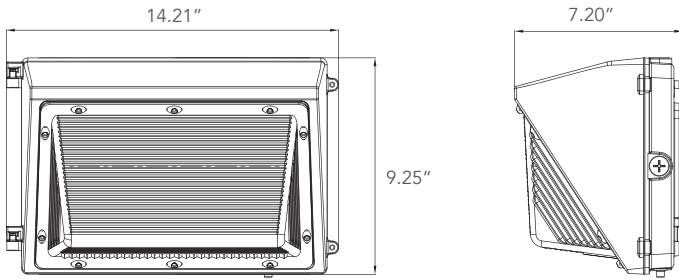

### Photometrics

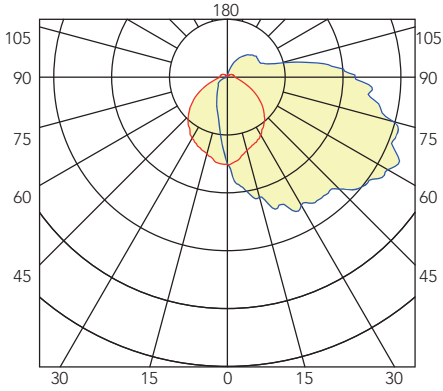



<b>Project Name</b>	
<b>Catalog #</b>	
<b>Job Type</b>	
<b>Prepared By</b>	
<b>Notes</b>	

### Fixture Ordering Information

Part #	Wattage	Lumens	Kelvin	Voltage
LL-WP-30-50-UNV-BZ	30	3600	5000	120-277
LL-WP-30-40-UNV-BZ	30	3550	4000	120-277
LL-WP-40-50-UNV-BZ	40	5100	5000	120-277
LL-WP-40-40-UNV-BZ	40	5000	4000	120-277
LL-WP-65-50-UNV-BZ	65	7900	5000	120-277
LL-WP-65-40-UNV-BZ	65	7800	4000	120-277
LL-WP-90-50-UNV-BZ	90	10500	5000	120-277
LL-WP-90-40-UNV-BZ	90	10000	4000	120-277
LL-WP-125-50-UNV-BZ	125	15000	5000	120-277
LL-WP-125-40-UNV-BZ	125	14500	4000	120-277
LL-WP-[30][40][55][65]-3CCT-UNV-BZ	30/40/55/65	3600/51000/6700/7900	3000/4000/5000	120-277
LL-WP-[40][65][90][125]-3CCT-UNV-BZ	40/65/90/125	5000/7800/10000/14000	3000K 4000K 5000K	120-277

\* Please contact LITELUME for all Custom Option Requests

### Quick Ship Ordering Information

Part #
LL-WP-40-50-UNV-BZ
LL-WP-40-40-UNV-BZ
LL-WP-65-50-UNV-BZ
LL-WP-65-40-UNV-BZ
LL-WP-90-50-UNV-BZ
LL-WP-90-40-UNV-BZ
LL-WP-125-50-UNV-BZ
LL-WP-125-40-UNV-BZ
LL-WP-[30][40][55][65]-[30][40][50]-UNV-BZ

### Accessories Ordering Information

Part #	Wattage
PC	Button Photocell 120-277V
EM8	Emergency Battery Back Up 8W
SUB "UNV" WITH "480"	480 Volt

\* Please contact LITELUME for all Custom Option Requests

### Buy American Act Compliant Ordering Information

Part #	Description
BAA-WP	Buy American Act Compliant for Wallpack All Purpose Series

\* Please contact LITELUME for all Custom Option Requests