



Parking Garage Ocular



Description

The LITELUME™ LED Parking Garage Ocular (LL-PGO) is a low profile luminaire constructed with a IP65 rated one piece die cast housing suitable for both indoor and outdoor applications. Visually comfortable with 11.4% up light to provide enhance uniformity. Featuring a proprietary optical system with anti-glare lens making this fixture ideal for parking garages, storage areas, walkways and low or high security areas.

Fixture Information

Size:	28W/42W/56W/70W
Housing:	High performance Die-cast Aluminum
Finish:	Protective powder coat
Colors:	Standard: White (WH) Custom Options: Bronze (BZ) Black (BK) White (WH) Grey (GY)
Mountings:	Surface Mount or Pendant
Lens:	Polycarbonate
Uplight:	11.4%
CRI:	80
Power Factor:	.90
Dimmable:	Standard: 0-10v continuous
Voltage:	120-277V
Operating Temperature:	-22F - 113F
Sensor:	Standard: No sensor Optional: Microwave Motion Sensor
Warranty:	10-Year Limited Warranty

Performance Data

Lumen Output:

4,326 to 9,080 lm

Lumens Per Watt (typical):

130 lm/W

CCT:

4000K
5000K

CCT:

Type V

Lifespan:

Features High performance LED's with up to 100,000 running hours

Ratings & Certificates


UL Listed For Wet Location
IP65 rated
Title 24 Compliant







Dimension

Item	Diameter	Height
PGO	12.6"	4"

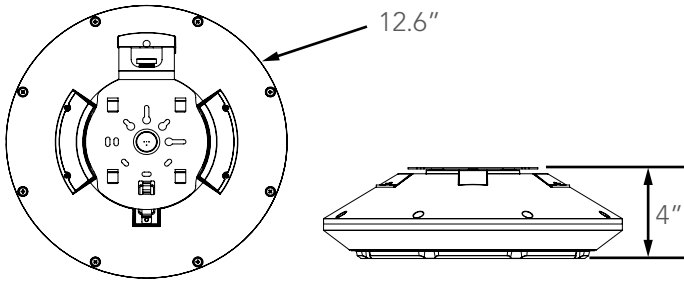


Structural Design

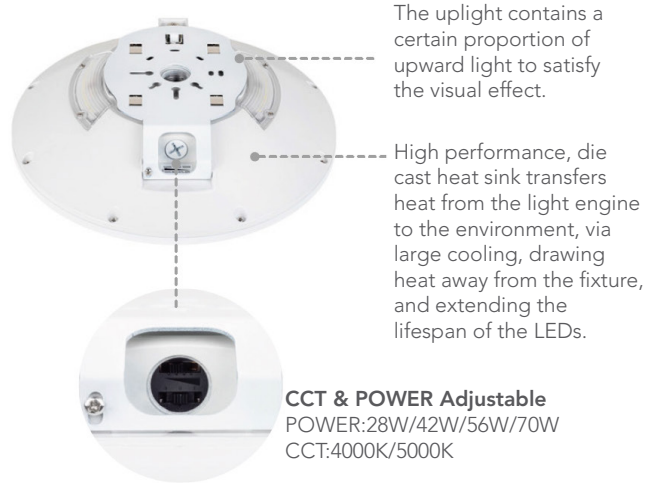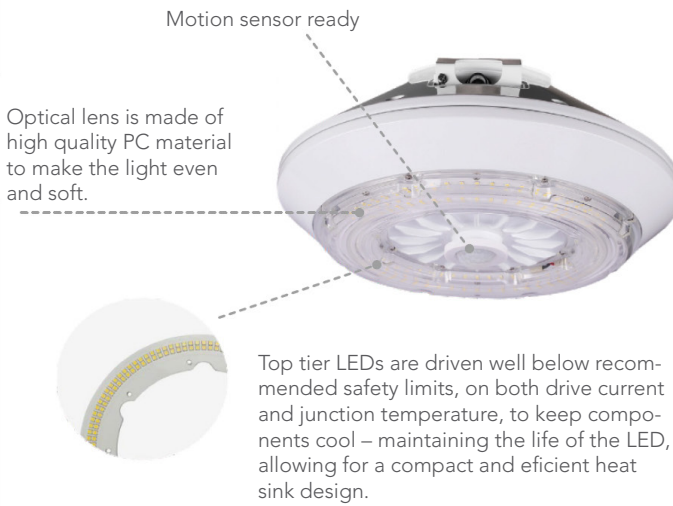





Photometric Data

70W 4000K

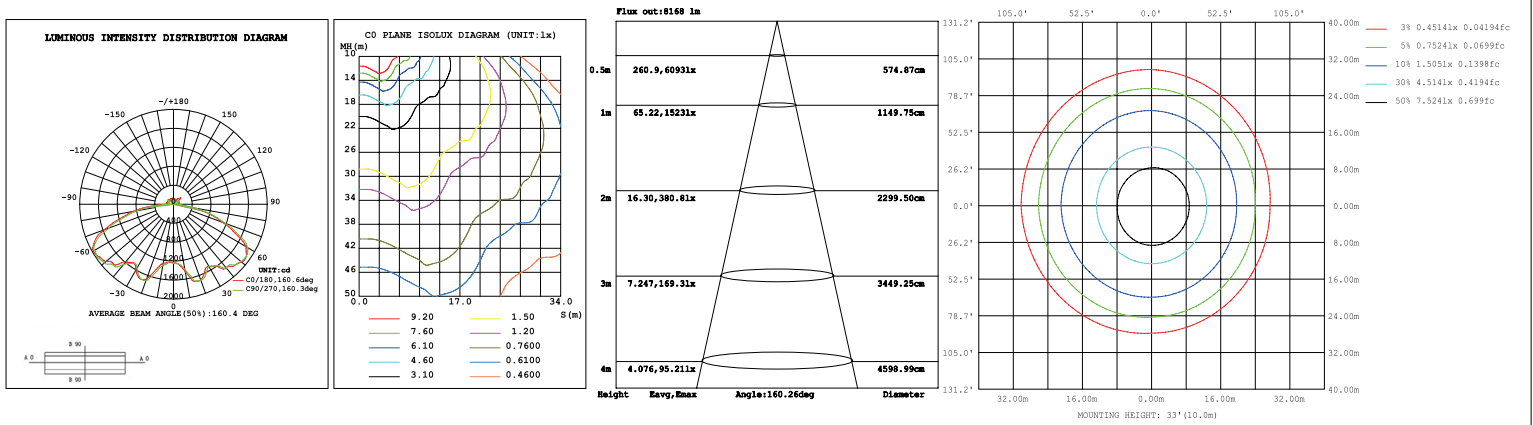



70W 5000K

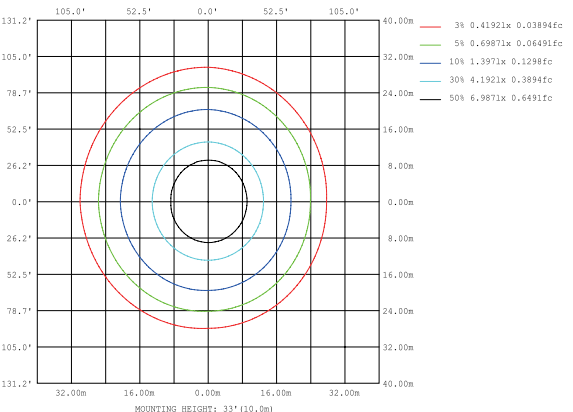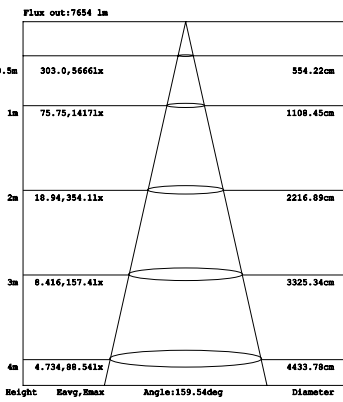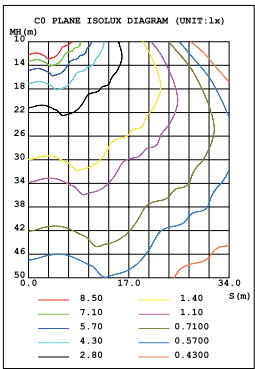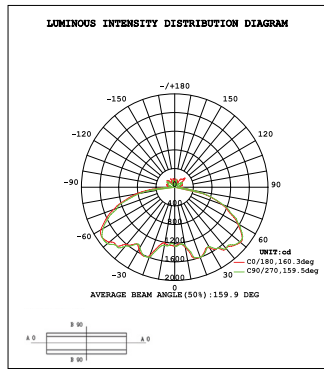



Project Name	
Catalog #	
Job Type	
Prepared By	
Notes	

Fixture Ordering Information

Part #	Wattage	Lumens	Kelvin	Voltage
LL-PGO-[28][42][56][70]-2CCT-UNV-WH	28W/42W/56W/70W	4326/5818/7321/9080	4000K 5000K	120-277

Accessories Ordering Information

Part #	Description
BRI823-B-D	Sharkward 120-277V 0-10V PIR Sensor
RC-100	Remote Control 100
EM8	Emergency Battery Back Up, 8W
EM15	Emergency Battery Back Up, 15W

* Please contact LITELUME for all Custom Option Requests