



# Vanity Modern Open



## Description

The LITELUME™ Vanity Modern Open (LL-VMO) features a die-formed cold rolled steel housing in satin nickel or oil rubbed bronze with a high transmission acrylic shade for an elegant soft appearance.

Applications: Hallways, Vanity lighting

## Fixture Information

Size:	15W/22W/32W
Housing:	Die-formed cold rolled steel
Finish:	Protective powdercoat
Color:	Standard: Satin Nickel (SN) Optional: Oil Rubbed Bronze (ORB)
Mounting:	Standard: Wall Mount
Lens:	High transmission acrylic
CRI:	80
Power Factor:	.98
Dimming:	None
THD:	<10%
Voltage:	Standard: 120-277V
Warranty:	10-Year Limited Warranty

## Performance Data

### Lumen Output:

1500 to 3000 lm

### Lumens Per Watt (typical):

100 lm/W

### CCT:

3000K  
3500K  
4000K

### Lifespan:

60,000 running hours

## Ratings & Certificates


ETL/cETL Listed  
CEC Listed, Meets Title24 JA8 Requirements





## Dimension

Item	Depth	Width	Height
15W	3.7"	24"	4.3"
22W	3.7"	36"	4.3"
32W	3.7"	48"	4.3"

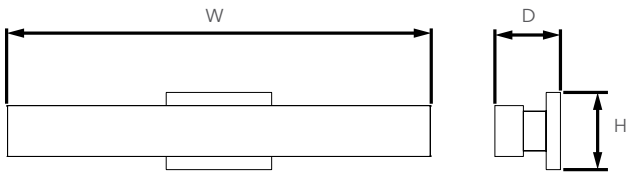



<b>Project Name</b>	
<b>Catalog #</b>	
<b>Job Type</b>	
<b>Prepared By</b>	
<b>Notes</b>	

### Fixture Ordering Information

Part #	Wattage	Lumens	Kelvin	Voltage
LL-VMO-15-3CCT-UNV-SN	15	1500	3000K/3500K/4000K	120-277V
LL-VMO-15-3CCT-UNV-ORB	15	1500	3000K/3500K/4000K	120-277V
LL-VMO-22-3CCT-UNV-SN	22	1900	3000K/3500K/4000K	120-277V
LL-VMO-22-3CCT-UNV-ORB	22	1900	3000K/3500K/4000K	120-277V
LL-VMO-32-3CCT-UNV-SN	32	3000	3000K/3500K/4000K	120-277V
LL-VMO-32-3CCT-UNV-ORB	32	3000	3000K/3500K/4000K	120-277V

\* Please contact LITELUME for all Custom Option Requests