



Description

Remote Capable Compact Thermoplastic Exit Sign

Illumination:

- Long-lasting, energy efficient Red or Green LED EXIT sign illumination.

Electrical:

- Dual 120V/277 voltage standard. Optional dual 120V/230V available.
- Unique bi-color LED indicator light alerts occupant on battery condition (Green-normal, Red-check battery).
- 3.6V long life, maintenance-free, rechargeable Ni-Cd battery.
- 3.0W of remote capacity standard
- Internal solid-state transfer switch automatically connects the internal battery to LED board and connected LED lamp heads for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.

Mounting:

- EZ-snap thermoplastic mounting canopy included – provides top or end mount.
- Universal K/O pattern on back plate for wall mount.

Housing:

- Injection-molded, engineering grade, 5VA flame retardant, high-impact, thermoplastic in white or black finish.

Options:


- SPV: UL Listed for special voltage option.
- SDT: Self-diagnostic feature performs monthly, biannual, and annual tests to ensure reliable operation and meet electrical and life safety codes. Universal 120-277 voltage.

Warranty/Listing:

- Seven year warranty on all electronics and housing. Battery prorated for five years.
- UL Listed for damp locations (0°C – 40°C).
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.
- Certified to CEC under Title 20 Regulations.



Dimensions:

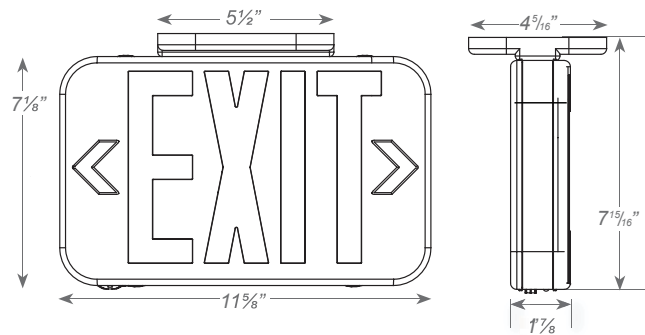



| | |
|---------------------|--|
| Project Name | |
| Catalog # | |
| Job Type | |
| Prepared By | |
| Notes | |

Fixture Ordering Information

| Model | No. of Faces | Letter Color | Housing Color | Options |
|-----------|---------------------------------------|----------------------------------|--------------------|--|
| LL-CEXTEU | 2 Universal Single/ Double Face | R Red G Green RG Red/Green | W White B Black | SDT Self-Diagnostics ¹ SPV 120/230 Volt 50/60Hz ¹ |

¹ Not available with RG units.

Electrical Information

| Catalog Number | Input Watts (W) | | | Input Amps (A) | | |
|----------------------|-----------------|------|------|----------------|------|------|
| | 120V | 230V | 277V | 120V | 230V | 277V |
| LL- CEXTEU RG | 1.2 | N/A | 1.2 | 0.12 | N/A | 0.12 |
| LL- CEXTEU Red/Green | 1.2 | 1.2 | 1.2 | 0.12 | 0.12 | 0.12 |
| LL- CEXTEU Red SDT | 3.0 | 3.0 | 3.0 | 0.05 | 0.05 | 0.05 |
| LL- CEXTEU Green SDT | 2.7 | 2.7 | 2.7 | 0.05 | 0.05 | 0.05 |