



Wallpack Medium



Description

The LITELUME™ Wallpack (LL-WPM) features a die-cast aluminum housing with a glass optical lens for long-lasting durability. Installation can be done without opening the driver box. CCT and Wattage Selectable.

Applications: Hallway, Perimeter lighting and Walkway lighting.

Fixture Information

Size:	26W/39W/52W/62W
Housing:	Die-cast Aluminum Housing
Finish:	Protective powdercoat
Color:	Standard: Bronze Custom Options: Black (BK) White (WH) Grey (GY)
Mounting:	Standard: Wall Mount
Lens:	Glass
Surge Protector:	Optional: 10 kVA
Voltage:	Standard: 120-277V
Power Factor:	.90
CRI:	80
Operating Temperature:	-40°F to 104°F
Sensor:	Standard: No sensor Custom: Button Photocell (120-277V)
Warranty:	10-Year Limited Warranty

Performance Data

Lumen Output:

3,600 to 7,800 lm

Lumens Per Watt (typical):

131-133 lm/W

CCT:

3000K
4000K
5000K

Lifespan:

Up to 100,000 running hours

Ratings & Certificates

UL Listed For Wet Location
Title 24 Compliant
TAA Compliant/BAA Optional




Quick Ship Ordering Information

Part #
LL-WPM-[26][39][52][62]-3CCT-UNV-BZ




Dimension

Item	Width	Length	Height
Wallpack Medium	7.08"	11.95"	7.68"

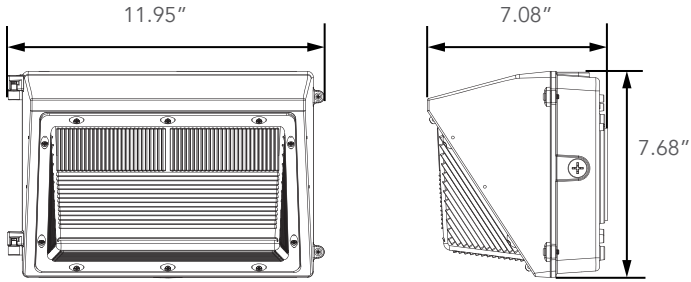

Photometrics

Luminous Intensity Distribution Curve

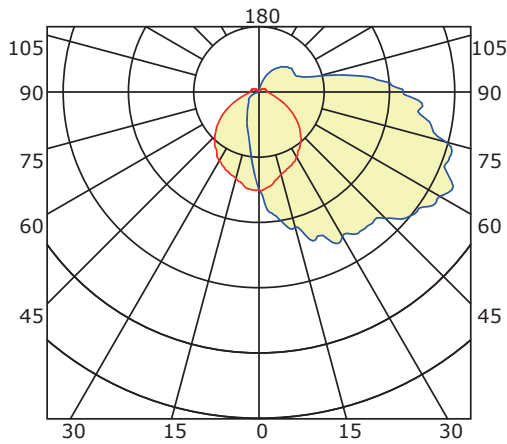

Average Diffuse Angle(50%): 103.0°

Structural Design

Photocell (Option)
Optional photocell allows for security and energy saving

Power and CCT controller
The wattage and CCT can be changed by switch selection on the controller, it is easy and very fast to meet the varied requirements

Emergency(Optional)
8W Emergency battery, 900lm, 90min. Only suitable for 27W,45W,65W,70W

Occupancy sensor(Optional)

Mounting
The external portable mounting plate makes installation super easy and simple. There's no need to open fixture housing, nor drill on housing, which greatly minimizes the risk of water ingress.



Project Name	
Catalog #	
Job Type	
Prepared By	
Notes	

Fixture Ordering Information

Part #	Wattage	Lumens	Kelvin	Voltage
LL-WPM-[26][39][52][62]-3CCT-UNV-BZ	26W/39W/52W/62W	3600/5200/6600/7800	3000K/4000K/5000K	120-277

Quick Ship Ordering Information

Part #
LL-WPM-[26][39][52][62]-3CCT-UNV-BZ

Accessories Ordering Information

Part #	Wattage
PC	Button Photocell, 120-277V
BRI823-B-D	Sharkward 120-277V 0-10V PIR Sensor
RC-100	Remote Control 100
EM8	Emergency Battery Back Up 8W

* Please contact LITELUME for all Custom Option Requests

Buy American Act Compliant Ordering Information

Part #	Description
BAA-WPM	Buy American Act Compliant for Wallpack Medium

* Please contact LITELUME for all Custom Option Requests